

1954016

<https://www.phoenixcontact.com/us/products/1954016>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 500 V, nominal current: 29 A, 1st level connection left, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup> - 4 mm<sup>2</sup>, connection method: Spade connection, mounting: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- The slotted plugs enable one fully insulated or two bare 2.8 mm slip-on sleeves to be slid on in place of one 6.3 mm slip-on sleeve
- The housing panels only protrude slightly beyond the metal parts because it is assumed that fully-insulated slip-on sleeves are connected
- The front slip-on plug-in connection is the ideal wiring design for applications where space is limited and cable ducts need to be moved close to the terminal strip

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1954016             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BE05                |
| Product key                          | BE511X              |
| Catalog page                         | Page 534 (C-1-2019) |
| GTIN                                 | 4017918052560       |
| Weight per piece (including packing) | 12.778 g            |
| Weight per piece (excluding packing) | 12.778 g            |
| Customs tariff number                | 85369010            |
| Country of origin                    | PL                  |

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## Technical data

### Product properties

|                       |                             |
|-----------------------|-----------------------------|
| Product type          | Feed-through terminal block |
| Number of connections | 4                           |
| Number of rows        | 1                           |
| Potentials            | 1                           |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 1.02 W |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 4                 |
| Nominal cross section           | 4 mm <sup>2</sup> |

### 1st level connection left

|                                                                                           |                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screw thread                                                                              | M3                                                                                                                                                                     |
| Tightening torque                                                                         | 0.6 ... 0.8 Nm                                                                                                                                                         |
| Stripping length                                                                          | 8 mm                                                                                                                                                                   |
| Internal cylindrical gage                                                                 | A3                                                                                                                                                                     |
| Conductor cross section rigid                                                             | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                                                                                                              |
| Cross section AWG                                                                         | 24 ... 12 (converted acc. to IEC)                                                                                                                                      |
| Conductor cross section flexible                                                          | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                                                                                                              |
| Conductor cross section, flexible [AWG]                                                   | 24 ... 12 (converted acc. to IEC)                                                                                                                                      |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                                                                                                             |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                                                                                                           |
| Cross-section with insertion bridge, rigid                                                | 4 mm <sup>2</sup>                                                                                                                                                      |
| Cross-section with insertion bridge, flexible                                             | 4 mm <sup>2</sup>                                                                                                                                                      |
| 2 conductors with same cross section, solid                                               | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                                                                                                            |
| 2 conductors with same cross section, flexible                                            | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                                                                                                            |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                                                                                                           |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                                                                                                            |
| Nominal current                                                                           | 29 A                                                                                                                                                                   |
| Maximum load current                                                                      | 29 A (with 4 mm <sup>2</sup> conductor cross section)                                                                                                                  |
| Nominal voltage                                                                           | 500 V (voltage data for slip-on connections in acc. with EN 61210 are also dependent on nominal size, material, insulation of the sleeve and conductor cross section.) |
| Nominal cross section                                                                     | 4 mm <sup>2</sup>                                                                                                                                                      |

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 6.2 mm  |
| End cover width    | 2.2 mm  |
| Height             | 68 mm   |
| Depth on NS 32     | 49 mm   |
| Depth on NS 35/7,5 | 44 mm   |
| Depth on NS 35/15  | 51.5 mm |

## Material specifications

|                                        |      |
|----------------------------------------|------|
| Color                                  | gray |
| Flammability rating according to UL 94 | V2   |
| Insulating material group              | I    |
| Insulating material                    | PA   |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Environmental and real-life conditions

### Ambient conditions

|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)       |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |
|               | NS 32     |

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block




1954016

<https://www.phoenixcontact.com/us/products/1954016>

## Drawings

Circuit diagram

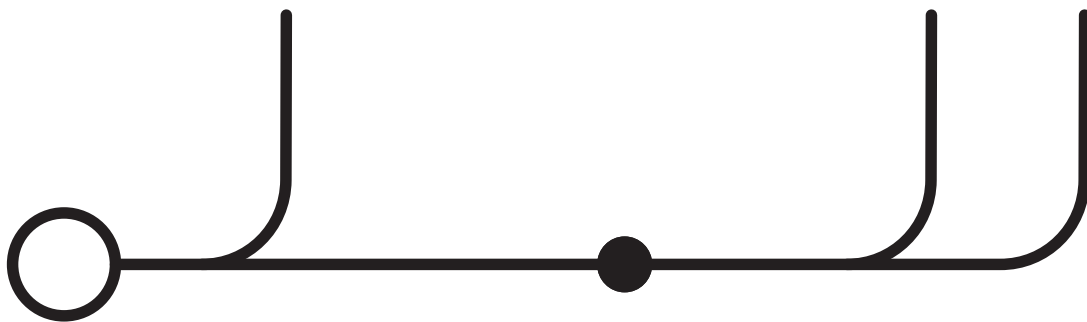


# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

Circuit diagram

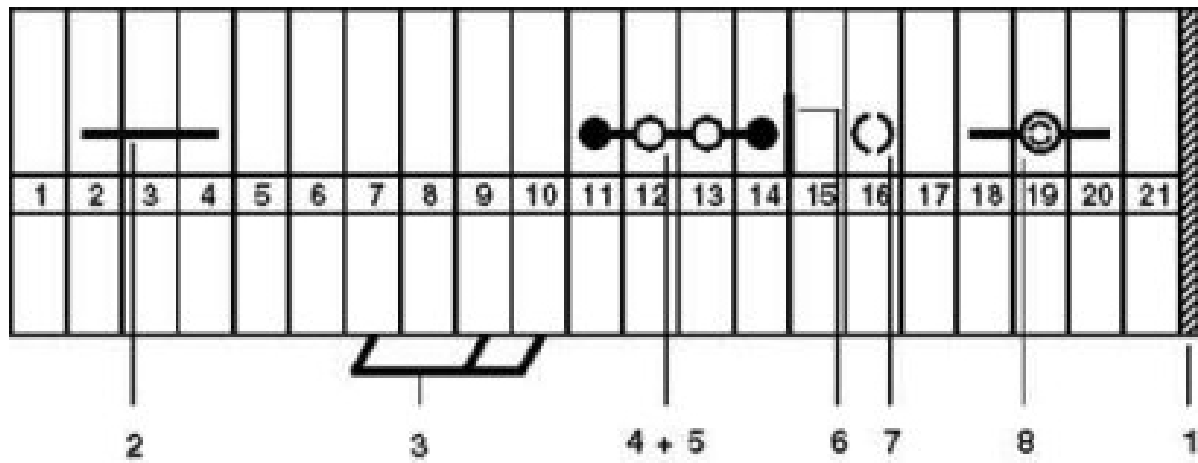

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1954016>

DNV

Approval ID: TAE00001CT

|             |                                                                                         |                                |                   |                               |
|-------------|-----------------------------------------------------------------------------------------|--------------------------------|-------------------|-------------------------------|
| Use group C | <div><div></div><div><div>UL Recognized</div><div>Approval ID: E60425</div></div></div> |                                |                   |                               |
|             | Nominal voltage U <sub>N</sub>                                                          | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|             | 300 V                                                                                   | 25 A                           | 28 - 12           | -                             |

EAC

Approval ID: RU C-DE.BL08.B.00541

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016  
<https://www.phoenixcontact.com/us/products/1954016>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141120 |
| ECLASS-13.0 | 27250101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000897 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016  
<https://www.phoenixcontact.com/us/products/1954016>

## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## Accessories



Note: Applying some accessories below might limit this product.

### IS-K 4 - Bridge bar isolator

1302338

<https://www.phoenixcontact.com/us/products/1302338>



Bridge bar isolator, color: gray

### ISSBI 10- 6 - Bridge

0301505

<https://www.phoenixcontact.com/us/products/0301505>



Bridge, pitch: 6 mm, number of positions: 10, color: silver



Max. current carrying capacity: 24 A

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## FBI 100- 6 - Fixed bridge

0201650

<https://www.phoenixcontact.com/us/products/0201650>



Fixed bridge, pitch: 6.2 mm, number of positions: 100, color: silver

---

## FBI 10- 6 - Fixed bridge

0203250

<https://www.phoenixcontact.com/us/products/0203250>



Fixed bridge, pitch: 6.2 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 24 A

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## FBI 20- 6 - Fixed bridge

0201867

<https://www.phoenixcontact.com/us/products/0201867>

Fixed bridge, pitch: 6.2 mm, number of positions: 20, color: silver



---

## EB 3- 6 - Insertion bridge

0201142

<https://www.phoenixcontact.com/us/products/0201142>

Insertion bridge, pitch: 6.2 mm, number of positions: 3, color: gray



 Max. current carrying capacity: 24 A

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## EB 2- 6 - Insertion bridge

0201155

<https://www.phoenixcontact.com/us/products/0201155>

Insertion bridge, pitch: 6.2 mm, number of positions: 2, color: gray



 Max. current carrying capacity: 24 A

---

## EB 10- 6 - Insertion bridge

0201139

<https://www.phoenixcontact.com/us/products/0201139>

Insertion bridge, pitch: 6.2 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 24 A

---

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## D-UVKB 4 - End cover

1920024

<https://www.phoenixcontact.com/us/products/1920024>



End cover, depth: 34 mm, width: 2.2 mm, height: 68 mm, color: gray

---

## TS-K - Separating plate

1302215

<https://www.phoenixcontact.com/us/products/1302215>



Separating plate, depth: 22 mm, width: 0.5 mm, height: 22 mm, color: gray

## UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## SBS 6:UNBEDRUCKT - Marker card

1007222

<https://www.phoenixcontact.com/us/products/1007222>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snapped, snap into flat marker groove, for terminal block width: 6 mm, lettering field size: 6 x 6.1 mm, Number of individual labels: 250

---

## NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

---

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

## UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



### ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/us/products/1051003>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

### ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/us/products/0824992>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/us/products/1051016>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/us/products/1051029>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/us/products/1051032>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/us/products/1051414>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/us/products/1051430>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

## UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/us/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

## UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



### UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/us/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

### UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

## UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/us/products/0829602>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



---

## E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



## UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



### PSBJ 3/13/4 - Test plug strip

0201304

<https://www.phoenixcontact.com/us/products/0201304>



Test plug strip, number of positions: 1, color: silver

---

### PSB 3/10/4 - Test plug strip

0601292

<https://www.phoenixcontact.com/us/products/0601292>



Test plug strip, number of positions: 1, color: silver

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## C-SCF 1/2,8X0,5 - Connector

3240152

<https://www.phoenixcontact.com/us/products/3240152>



Slip-on sleeve, non-insulated, 0.5 ... 1 mm<sup>2</sup>, 2.8 x 0.5

---

## C-SCFI 1,5/2,8X0,5 - Connector

3240048

<https://www.phoenixcontact.com/us/products/3240048>



Slip-on sleeve, red, 0.5 ... 1.5 mm<sup>2</sup>, 2.8 x 0.5

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## C-SCF 1/2,8X0,8 - Connector

3240153

<https://www.phoenixcontact.com/us/products/3240153>



Slip-on sleeve, non-insulated, 0.5 ... 1 mm<sup>2</sup>, 2.8 x 0.8

---

## C-SCFI 1,5/2,8X0,8 - Connector

3240049

<https://www.phoenixcontact.com/us/products/3240049>



Slip-on sleeve, red, 0.5 ... 1.5 mm<sup>2</sup>, 2.8 x 0.8

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## C-SCF 1,5/6,3X0,8 - Connector

3240156

<https://www.phoenixcontact.com/us/products/3240156>



Slip-on sleeve, non-insulated, 0.5 ... 1.5 mm<sup>2</sup>, 6.3 x 0.8

---

## C-SCFI 1,5/6,3X0,8 - Connector

3240052

<https://www.phoenixcontact.com/us/products/3240052>



Slip-on sleeve, red, 0.5 ... 1.5 mm<sup>2</sup>, 6.3 x 0.8

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## C-SCF 2,5/6,3X0,8 - Connector

3240159

<https://www.phoenixcontact.com/us/products/3240159>



Slip-on sleeve, non-insulated, 1.5 ... 2.5 mm<sup>2</sup>, 6.3 x 0.8

---

## C-SCFI 2,5/6,3X0,8 - Connector

3240055

<https://www.phoenixcontact.com/us/products/3240055>



Slip-on sleeve, blue, 1.5 ... 2.5 mm<sup>2</sup>, 6.3 x 0.8

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block

1954016

<https://www.phoenixcontact.com/us/products/1954016>



## C-SCF 6/6,3X0,8 - Connector

3240160

<https://www.phoenixcontact.com/us/products/3240160>



Slip-on sleeve, non-insulated, 4 ... 6 mm<sup>2</sup>, 6.3 x 0.8

---

## C-SCFI 6/6,3X0,8 - Connector

3240056

<https://www.phoenixcontact.com/us/products/3240056>



Slip-on sleeve, yellow, 4 ... 6 mm<sup>2</sup>, 6.3 x 0.8

# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## PT/FS 2,8 - Insulating sleeve

1406700

<https://www.phoenixcontact.com/us/products/1406700>

Insulating sleeve, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves



---

## PT/FS 6,3 - Insulating sleeve

0604707

<https://www.phoenixcontact.com/us/products/0604707>

Insulating sleeve, as touch protection, slide onto the conductor before for 6.3 slip-on sleeves



# UVKB 4-FS(6-2,8-0,8) - Feed-through terminal block



1954016

<https://www.phoenixcontact.com/us/products/1954016>

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)