


# Specifications



Photo is representative

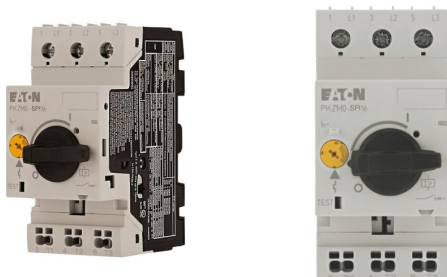

## Eaton 199179

Eaton Moeller® series Motor-protective circuit-breaker; 0.09 kW, 0.25 - 0.4 A, Feed-side screw terminals/output-side push-in terminals

### General specifications

|                     |  |
|---------------------|--|
| <b>PRODUCT NAME</b> | Eaton Moeller® series<br>PKZM0 Motor-protective<br>circuit-breaker |
|---------------------|--|

|                       |        |
|-----------------------|--------|
| <b>CATALOG NUMBER</b> | 199179 |
|-----------------------|--------|

|            |               |
|------------|---------------|
| <b>EAN</b> | 4015081972630 |
|------------|---------------|

|                                 |       |
|---------------------------------|-------|
| <b>PRODUCT<br/>LENGTH/DEPTH</b> | 75 mm |
|---------------------------------|-------|

|                       |       |
|-----------------------|-------|
| <b>PRODUCT HEIGHT</b> | 94 mm |
|-----------------------|-------|

|                      |       |
|----------------------|-------|
| <b>PRODUCT WIDTH</b> | 45 mm |
|----------------------|-------|

|                       |         |
|-----------------------|---------|
| <b>PRODUCT WEIGHT</b> | 0.25 kg |
|-----------------------|---------|

|                       |  |
|-----------------------|--|
| <b>CERTIFICATIONS</b> | IEC/EN 60947<br>VDE 0660<br>UL File No.: E36332<br>IEC/EN 60947-4-1<br>CSA File No.: 165628<br>UL Category Control No.:<br>NLRV<br>UL<br>CSA-C22.2 No. 60947-4-1-<br>14<br>CSA Class No.: 3211-05<br>CSA<br>UL 60947-4-1<br>CE |
|-----------------------|--|

|                   |                 |
|-------------------|-----------------|
| <b>MODEL CODE</b> | PKZM0-0,4-SP116 |
|-------------------|-----------------|

## Features & Functions

|                        |  |
|------------------------|--|
| <b>ACTUATOR TYPE</b>   | Turn button  |
| <b>FEATURES</b>        | Phase-failure sensitivity (according to IEC/EN 60947-4-1, VDE 0660 Part 102) |
| <b>FUNCTIONS</b>       | Motor protection<br>Phase failure sensitive                                  |
| <b>NUMBER OF POLES</b> | Three-pole   |

## General

|   |   |
|---|---|
| <b>LIFESPAN, ELECTRICAL</b>                   | 100,000 operations  |
| <b>LIFESPAN, MECHANICAL</b>                   | 100,000 Operations  |
| <b>MOUNTING METHOD</b>                        | DIN rail (top hat rail) mounting optional   |
| <b>MOUNTING POSITION</b>                      | Can be snapped on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height.  |
| <b>OPERATING FREQUENCY</b>                    | 40 Operations/h   |
| <b>OVERVOLTAGE CATEGORY</b>                   | III   |
| <b>POLLUTION DEGREE</b>                       | 3   |
| <b>PRODUCT CATEGORY</b>                       | Motor protective circuit breaker  |
| <b>PROTECTION</b>                             | Finger and back-of-hand proof, Protection against direct contact when actuated from front (EN 50274)  |
| <b>RATED IMPULSE WITHSTAND VOLTAGE (UIMP)</b> | 6000 V AC   |
| <b>SHOCK RESISTANCE</b>                       | 25 g, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms   |
| <b>SUITABLE FOR</b>                           | Also motors with efficiency class IE3<br>Branch circuit: Manual type E if used with terminal, or suitable for group installations, (UL/CSA) |
| <b>TEMPERATURE COMPENSATION</b>               | $\leq 0.25\ \% / K$ , residual error for $T > 40^{\circ}$<br>-25 - 55 °C, Operating range<br>-5 - 40 °C to IEC/EN 60947, VDE 0660           |

## Climatic environmental conditions

|   |  |
|---|--|
| <b>ALTITUDE</b>                                       | Max. 2000 m  |
| <b>AMBIENT OPERATING TEMPERATURE - MIN</b>            | -25 °C   |
| <b>AMBIENT OPERATING TEMPERATURE - MAX</b>            | 55 °C  |
| <b>AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MIN</b> | -25 °C   |
| <b>AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MAX</b> | 40 °C  |
| <b>AMBIENT STORAGE TEMPERATURE - MIN</b>              | -40 °C   |
| <b>AMBIENT STORAGE TEMPERATURE - MAX</b>              | 80 °C  |
| <b>CLIMATIC PROOFING</b>                              | Damp heat, cyclic, to IEC 60068-2-30<br>Damp heat, constant, to IEC 60068-2-78 |

## Electrical rating

|  |         |
|--|---------|
| <b>RATED FREQUENCY - MIN</b>                             | 50 Hz   |
| <b>RATED FREQUENCY - MAX</b>                             | 60 Hz   |
| <b>RATED OPERATIONAL POWER AT AC-3, 220/230 V, 50 HZ</b> | 0.06 kW |
| <b>RATED OPERATIONAL POWER AT AC-3, 380/400 V, 50 HZ</b> | 0.09 kW |
| <b>RATED OPERATIONAL VOLTAGE (UE) - MIN</b>              | 690 V   |
| <b>RATED OPERATIONAL VOLTAGE (UE) - MAX</b>              | 690 V   |
| <b>RATED UNINTERRUPTED CURRENT (IU)</b>                  | 0.4 A   |

## Terminal capacities

|  |  |
|--|--|
| <b>TERMINAL CAPACITY (FLEXIBLE WITH UNISOLATED FERRULE)</b>          | 1 x (1 - 6) mm <sup>2</sup> , Screw terminals<br>2 x (1 - 6) mm <sup>2</sup> , Screw terminals<br>1 x (1 - 2.5) mm <sup>2</sup> , Push-in terminals<br>2 x (1 - 2.5) mm <sup>2</sup> , Push-in terminals |
| <b>TERMINAL CAPACITY (FLEXIBLE WITH ULTRASONIC WELDED CABLE END)</b> | 1 x (1 - 6) mm <sup>2</sup> , Screw terminals<br>2 x (1 - 6) mm <sup>2</sup> , Screw terminals<br>1 x (1 - 2.5) mm <sup>2</sup> , Push-in terminals<br>2 x (1 - 2.5) mm <sup>2</sup> , Push-in terminals |
| <b>TERMINAL CAPACITY (FLEXIBLE)</b>                                  | 1 x (1 - 6) mm <sup>2</sup> , Screw terminals<br>2 x (1 - 6) mm <sup>2</sup> , Screw terminals<br>1 x (1 - 2.5) mm <sup>2</sup> , Push-in terminals<br>2 x (1 - 2.5) mm <sup>2</sup> , Push-in terminals |
| <b>TERMINAL CAPACITY (SOLID/STRANDED AWG)</b>                        | 18 - 10, screw terminals<br>20 - 14, Push-in terminals   |
| <b>STRIPPING LENGTH (MAIN CABLE)</b>                                 | 10 mm  |
| <b>TIGHTENING TORQUE</b>   | 1.7 Nm, Screw terminals, Main cable  |

## Short-circuit rating

|  |  |
|--|--|
| <b>SHORT-CIRCUIT CURRENT RATING (GROUP PROTECTION)</b> | 50 kA, 600 V High Fault, Fuse, SCCR (UL/CSA) with 600 A, 600 V High Fault, Fuse, SCCR (UL/CSA)<br>50 kA, 600 V High Fault, CB, SCCR (UL/CSA) with 600 A, 600 V High Fault, CB, SCCR (UL/CSA) |
| <b>SHORT-CIRCUIT CURRENT RATING (TYPE E)</b>           | 50 kA, 600 Y/347 V, SCCR (UL/CSA)<br>65 kA, 240 V, SCCR (UL/CSA)<br>65 kA, 480 Y/277 V, SCCR (UL/CSA)<br>Accessories required BK25/3-PKZ0-E  |
| <b>SHORT-CIRCUIT RELEASE</b>                           | Basic device fixed 15.5 x Iu   |

## Communication

|                   |                                  |
|-------------------|----------------------------------|
| <b>CONNECTION</b> | Push-in terminals on output side |
|                   | Screw terminals on feed side     |

## Trip blocks

|   |                                       |
|---|---------------------------------------|
| <b>OVERLOAD RELEASE CURRENT SETTING - MIN</b> | 0.25 A                                |
| <b>OVERLOAD RELEASE CURRENT SETTING - MAX</b> | 0.4 A                                 |
| <b>TRIPPING CHARACTERISTIC</b>                | Overload trigger: tripping class 10 A |

± 20% tolerance  
6.2 A, I<sub>rm</sub>

## Contacts

|  |   |
|--|---|
| <b>NUMBER OF AUXILIARY CONTACTS (CHANGE-OVER CONTACTS)</b>     | 0 |
| <b>NUMBER OF AUXILIARY CONTACTS (NORMALLY CLOSED CONTACTS)</b> | 0 |
| <b>NUMBER OF AUXILIARY CONTACTS (NORMALLY OPEN CONTACTS)</b>   | 0 |

## Design verification

|   |  |
|---|--|
| <b>EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID</b>                               | 5.22 W                                     |
| <b>HEAT DISSIPATION CAPACITY PDISS</b>  | 0 W  |
| <b>HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID</b>                                | 1.7 W                                      |
| <b>RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)</b>                    | 0.4 A                                      |
| <b>STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS</b>                               | 0 W  |
| <b>10.2.2 CORROSION RESISTANCE</b>  | Meets the product standard's requirements. |
| <b>10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES</b>                         | Meets the product standard's requirements. |
| <b>10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT</b>       | Meets the product standard's requirements. |
| <b>10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS</b> | Meets the product standard's requirements. |
| <b>10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION</b>                                 | Meets the product standard's requirements. |
| <b>10.2.5 LIFTING</b>   | Does not apply, since the                  |

|   |  |
|---|--|
|   | entire switchgear needs to be evaluated.   |
| <b>10.2.6 MECHANICAL IMPACT</b>                                 | Does not apply, since the entire switchgear needs to be evaluated.   |
| <b>10.2.7 INSCRIPTIONS</b>                                      | Meets the product standard's requirements.   |
| <b>10.3 DEGREE OF PROTECTION OF ASSEMBLIES</b>                  | Does not apply, since the entire switchgear needs to be evaluated.   |
| <b>10.4 CLEARANCES AND CREEPAGE DISTANCES</b>                   | Meets the product standard's requirements.   |
| <b>10.5 PROTECTION AGAINST ELECTRIC SHOCK</b>                   | Does not apply, since the entire switchgear needs to be evaluated.   |
| <b>10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS</b>   | Does not apply, since the entire switchgear needs to be evaluated.   |
| <b>10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS</b>        | Is the panel builder's responsibility.   |
| <b>10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS</b>                 | Is the panel builder's responsibility.   |
| <b>10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH</b>                 | Is the panel builder's responsibility.   |
| <b>10.9.3 IMPULSE WITHSTAND VOLTAGE</b>                         | Is the panel builder's responsibility.   |
| <b>10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL</b> | Is the panel builder's responsibility.   |
| <b>10.10 TEMPERATURE RISE</b>                                   | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| <b>10.11 SHORT-CIRCUIT RATING</b>                               | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| <b>10.12 ELECTROMAGNETIC COMPATIBILITY</b>                      | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| <b>10.13 MECHANICAL FUNCTION</b>                                | The device meets the requirements, provided the information in the   |

## Resources

### BROCHURES

[eaton-motor-starters-  
system-xstart-brochure-  
br03407001en-en-us.pdf](#)

### CATALOGUES

[Product Range Catalog  
Switching and protecting  
motors](#)

[eaton-switching-and-  
protecting-motors-  
product-range-catalog-  
ca034001en-en-us.pdf](#)

[eaton-product-overview-  
for-machinery-catalogue-  
ca08103003zen-en-us.pdf](#)

### DECLARATIONS OF CONFORMITY

[DA-DC-00004918.pdf](#)

[DA-DC-00004888.pdf](#)

### DRAWINGS

[eaton-manual-motor-  
starters-pkz-dimensions-  
002.eps](#)

[eaton-manual-motor-  
starters-pkzm-pkzm0-  
dimensions-002.eps](#)

[eaton-manual-motor-  
starters-pkz-  
dimensions.eps](#)

### ECAD MODEL

[ETN.199179.edz](#)

### INSTALLATION INSTRUCTIONS

[IL03407011Z.pdf](#)

### INSTALLATION VIDEOS

[WIN-WIN with push-in  
technology](#)

### MCAD MODEL

[pkzm0\\_s16\\_pi.stp](#)

[pkzm0\\_s16\\_pi.dwg](#)

### SALES NOTES

[eaton-link-module-for-  
motor-starters-pkz-flyer-  
fl034003en-en-us.pdf](#)

|                 |
|-----------------|
| PROJECT NAME:   |
| PROJECT NUMBER: |
| PREPARED BY:    |
| DATE:           |



**Eaton Corporation plc**  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

