


Specificaties



Foto is representatief

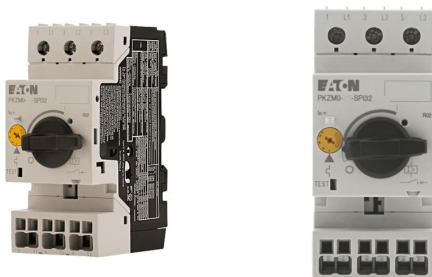

Eaton 199193

Eaton Moeller® series PKZM0 Motor-protective circuit-breaker, 0.25 kW, 0.63 - 1 A, Feed-side screw terminals/output-side push-in terminals, MSC

Algemene specificaties

PRODUCT NAME	Eaton Moeller® series PKZM0 Motor-protective circuit-breaker
---------------------	--

CATALOG NUMBER	199193
-----------------------	--------

EAN	4015081972777
------------	---------------

PRODUCT LENGTH/DEPTH	75 mm
-----------------------------	-------

PRODUCT HEIGHT	102 mm
-----------------------	--------

PRODUCT WIDTH	45 mm
----------------------	-------

PRODUCT WEIGHT	0.274 kg
-----------------------	----------

CERTIFICATIONS	VDE 0660 IEC/EN 60947 UL File No.: E36332 IEC/EN 60947-4-1 CSA File No.: 165628 UL Category Control No.: NLRV UL CSA-C22.2 No. 60947-4-1-14 CSA Class No.: 3211-05 CSA UL 60947-4-1 CE
-----------------------	---

MODEL CODE	PKZM0-1-SPI32
-------------------	---------------

Funcities & kenmerken

ACTUATOR TYPE	Turn button
FEATURES	Phase-failure sensitivity (according to IEC/EN 60947-4-1, VDE 0660 Part 102)
FUNCTIONS	Motor protection Phase failure sensitive
NUMBER OF POLES	Three-pole

Algemeen

CONNECTION	Screw terminals on feed side Push-in terminals on output side
LIFESPAN, ELECTRICAL	100,000 operations
LIFESPAN, MECHANICAL	100,000 Operations
MOUNTING METHOD	DIN rail (top hat rail) mounting optional
MOUNTING POSITION	Can be snapped on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height.
OPERATING FREQUENCY	40 Operations/h
OVERVOLTAGE CATEGORY	III
POLLUTION DEGREE	3
PRODUCT CATEGORY	Motor protective circuit breaker
PROTECTION	Finger and back-of-hand proof, Protection against direct contact when actuated from front (EN 50274)
RATED IMPULSE WITHSTAND VOLTAGE (UIMP)	6000 V AC
SHOCK RESISTANCE	25 g, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms
SUITABLE FOR	Also motors with efficiency class IE3 Branch circuit: Manual type E if used with terminal, or suitable for group installations, (UL/CSA)
TEMPERATURE COMPENSATION	≤ 0.25 %/K, residual error for T > 40° -25 - 55 °C, Operating range -5 - 40 °C to IEC/EN 60947, VDE 0660
USED WITH	Motor starter combinations type MSC...

Klimatologische milieuomstandigheden

ALTITUDE	Max. 2000 m
AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
AMBIENT OPERATING TEMPERATURE - MAX	55 °C
AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MIN	-25 °C
AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MAX	40 °C
AMBIENT STORAGE TEMPERATURE - MIN	-40 °C
AMBIENT STORAGE TEMPERATURE - MAX	80 °C
CLIMATIC PROOFING	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30

Klembereik

TERMINAL CAPACITY (FLEXIBLE WITH UNISOLATED FERRULE)	1 x (1 - 6) mm ² , Screw terminals 2 x (1 - 6) mm ² , Screw terminals 1 x (1 - 6) mm ² , Push-in terminals 2 x (1 - 6) mm ² , Push-in terminals
TERMINAL CAPACITY (FLEXIBLE WITH ULTRASONIC WELDED CABLE END)	1 x (1 - 10) mm ² 2 x (1 - 6) mm ² 1 x (1 - 6) mm ² , Screw terminals 2 x (1 - 6) mm ² , Screw terminals 1 x (1 - 10) mm ² , Push-in terminals 2 x (1 - 6) mm ² , Push-in terminals
TERMINAL CAPACITY (FLEXIBLE)	1 x (1 - 6) mm ² , Push-in terminals 2 x (1 - 6) mm ² , Push-in terminals 1 x (1 - 6) mm ² , Screw terminals 2 x (1 - 6) mm ² , Screw terminals
TERMINAL CAPACITY (SOLID)	1 x (1 - 6) mm ² , Screw terminals 2 x (1 - 6) mm ² , Screw terminals 1 x (1 - 6) mm ² , Push-in terminals 2 x (1 - 6) mm ² , Push-in terminals
TERMINAL CAPACITY (SOLID/STRANDED AWG)	18 - 10, screw terminals 18 - 8, Push-in terminals
STRIPPING LENGTH (MAIN CABLE)	12 mm
TIGHTENING TORQUE	1.7 Nm, Screw terminals, Main cable

Elektrische waarde

RATED FREQUENCY - MIN	50 Hz
RATED FREQUENCY - MAX	60 Hz
RATED OPERATIONAL POWER AT AC-3, 220/230 V, 50 HZ	0.12 kW
RATED OPERATIONAL POWER AT AC-3, 380/400 V, 50 HZ	0.25 kW
RATED OPERATIONAL VOLTAGE (UE) - MIN	690 V
RATED OPERATIONAL VOLTAGE (UE) - MAX	690 V
RATED UNINTERRUPTED CURRENT (IU)	1 A

Kortsluitvastheid

SHORT-CIRCUIT CURRENT RATING (GROUP PROTECTION)	50 kA, 600 V High Fault, Fuse, SCCR (UL/CSA) with 600 A, 600 V High Fault, Fuse, SCCR (UL/CSA) 50 kA, 600 V High Fault, CB, SCCR (UL/CSA) with 600 A, 600 V High Fault, CB, SCCR (UL/CSA)
SHORT-CIRCUIT CURRENT RATING (TYPE E)	50 kA, 600 Y/347 V, SCCR (UL/CSA) 65 kA, 240 V, SCCR (UL/CSA) 65 kA, 480 Y/277 V, SCCR (UL/CSA)
SHORT-CIRCUIT RELEASE	Basic device fixed 15.5 x Iu ± 20% tolerance 15.5 A, I _{rm}
RATED SHORT-CIRCUIT BREAKING CAPACITY ICS AT 400 V AC	150 kA
RATED SHORT-CIRCUIT BREAKING CAPACITY ICU AT 400 V AC	150 kA
RATED SHORT-CIRCUIT BREAKING CAPACITY ICU AT 440 V AC	150 kA
RATED SHORT-CIRCUIT BREAKING CAPACITY ICS AT 440 V AC	150 kA
RATED SHORT-CIRCUIT BREAKING CAPACITY ICU AT 500 V AC	150 kA
RATED SHORT-CIRCUIT BREAKING CAPACITY ICS AT 500 V AC	150 kA
RATED SHORT-CIRCUIT BREAKING CAPACITY ICU AT 690 V AC	150 kA
RATED SHORT-CIRCUIT BREAKING CAPACITY ICS AT 690 V AC	150 kA

Contacten

NUMBER OF AUXILIARY CONTACTS (CHANGE-OVER CONTACTS)	0
---	---

NUMBER OF AUXILIARY CONTACTS (NORMALLY CLOSED CONTACTS)	0
---	---

NUMBER OF AUXILIARY CONTACTS (NORMALLY OPEN CONTACTS)	0
---	---

Uitschakelblokken

OVERLOAD RELEASE CURRENT SETTING - MIN	0.63 A
--	--------

OVERLOAD RELEASE CURRENT SETTING - MAX	1 A
--	-----

TRIPPING CHARACTERISTIC	Overload trigger: tripping class 10 A
-------------------------	---------------------------------------

Ontwerpverificatie

EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID	5.33 W
--	--------

HEAT DISSIPATION CAPACITY PDISS	0 W
---------------------------------	-----

HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID	1.8 W
---	-------

RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)	1 A
---	-----

STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS	0 W
--	-----

10.2.2 CORROSION RESISTANCE	Meets the product standard's requirements.
-----------------------------	--

10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES	Meets the product standard's requirements.
--	--

10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT	Meets the product standard's requirements.
--	--

10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS	Meets the product standard's requirements.
--	--

10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION	Meets the product standard's requirements.
--	--

10.2.5 LIFTING	Does not apply, since the entire switchgear needs to be evaluated.
----------------	--

10.2.6 MECHANICAL IMPACT	Does not apply, since the entire switchgear needs to be evaluated.
--------------------------	--

10.2.7 INSCRIPTIONS	Meets the product standard's requirements.
---------------------	--

10.3 DEGREE OF PROTECTION OF ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
---	--

10.4 CLEARANCES AND CREEPAGE DISTANCES	Meets the product standard's requirements.
--	--

10.5 PROTECTION AGAINST ELECTRIC SHOCK	Does not apply, since the entire switchgear needs to be evaluated.
--	--

Documentatie

DECLARATIONS OF CONFORMITY	DA-DC-00004917.pdf
----------------------------	------------------------------------

	DA-DC-00004887.pdf
--	------------------------------------

ECAD MODEL	ETN.199193.edz
------------	--------------------------------

INSTALLATIEHANDLEIDINGEN	IL122024ZU
--------------------------	----------------------------

MCAD MODEL	pkzm0_s32_pi.dwg pkzm0_s32_pi.stp
------------	--

	eaton-manual-motor-starters-pkz-dimensions.eps
--	--

TEKENINGEN	eaton-manual-motor-starters-pkz-dimensions-002.eps
------------	--

	eaton-manual-motor-starters-pkzm-pkzm0-dimensions-003.eps
--	---

10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
10.10 TEMPERATURE RISE	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATUM:



Eaton Corporation plc

Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. Alle rechten voorbehouden.