

Data sheet for three-phase Squirrel-Cage-Motors

Totally Enclosed Fan Cooled (TEFC)



MLFB-Ordering data: 1LE2121-2AA21-4EA3

Motor type: GP100A - NEMA Premium Efficiency

Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

U [V]	Δ / Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]						Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque	T _A /T _N	T _k /T _N
						4/4	3/4	1/2	0	LRC		4/4	3/4	1/2	4/4	3/4	1/2	[lb-ft]	LRT [%]	BDT [%]
460	Y	60	10.00	7.50	3,515	11.50	8.70	6.30	3.50	81.0		90.2	91.1	91.0	90.3	88.8	81.5	15.0	180	440
230	YY	60	10.00	7.50	3,515	23.00	17.36	12.63	7.00	162.0		90.2	91.1	91.0	90.3	88.8	81.5	15.0	180	440

Frame Type 215TC	Type of constr.: (E) Foot mounted - C-Face	Ins. Cl.: F	Motor Prot.: (A) Without Protection	NEMA Des.: B	S.F.: 1.15
Mtr WT: 157 lbs	Mounting: (3) F-1, Standard Floor Mount, T. Box LHS	Temp. Rise Cl.: B	Amb. Temp.: +40 to -20 °C @1000 m	kVA: H	IP55

Mechanical data

WK2

Rotor Moment of Inertia:	1	Lb-ft ²
Ext Load Inertia Capability:	11.0	Lb-ft ²
Safe Stall Time		
Hot:	14.0	s
Cold:	28.0	s

Typical Noise Data

A-weighted Sound		
Sound Pressure:	78.0	dB(A)
Sound Power:	66.0	dB(A)

Octave Band Center Frequencies Hertz

	250	500	1000	2000	4000	8000	Hz
SPL@3 feet	53.0	55.0	63.0	62.0	58.0	47.0	dB(A)

Bearings

	DE	NDE
Bearing size:	6208 ZZ C3 S0	6208 ZZ C3 S0
Bearing Type:	Ball Bearing	Ball Bearing
AFBMA:	40BC02JPP30	40BC02JPP30

Grease

Capacity:	0.30	oz	0.30	oz
Type:	Exxon Mobile EM			
Thickener:	Polyurea			

Frame

Frame material:	aluminum
Coating (paint finish):	Standard Paint
Color, paint shade:	RAL 7030

Terminal box

Terminal box position:	(3) F-1, Standard Floor Mount, T. Box LHS
------------------------	---

Lead Wire Connection

Description:		9 LEAD - WYE			
Voltage	L1	L2	L3	Connected together	
LOW	T1 T7	T2 T8	T3 T9	T4 T5 T6	Y Y
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y

Ventilation Type

Type of Cooling:	TEFC
Fan Material:	Polypropylen
Fan Rotation:	Bidirectional

Additional information

VFD Operation:	CT: 4:1	VT: 20:1
Area: classification:	without	


Notes

I_L/I_N = locked rotor current / current nominal T_k/T_N = break down torque / nominal torque
 T_A/T_N = locked rotor torque / torque nominal ¹⁾ Value is valid only for DOL operation with motor design IC411


Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

Generated:
2020-09-17 01:34

Confir^o titre de secret d'entreprise. Tous droits r^o serv^o s.
Comunicado como secreto empresarial. Reservados todos os direitos.
Confliado como secreto de empresa. Nos reservamos todos los derechos.

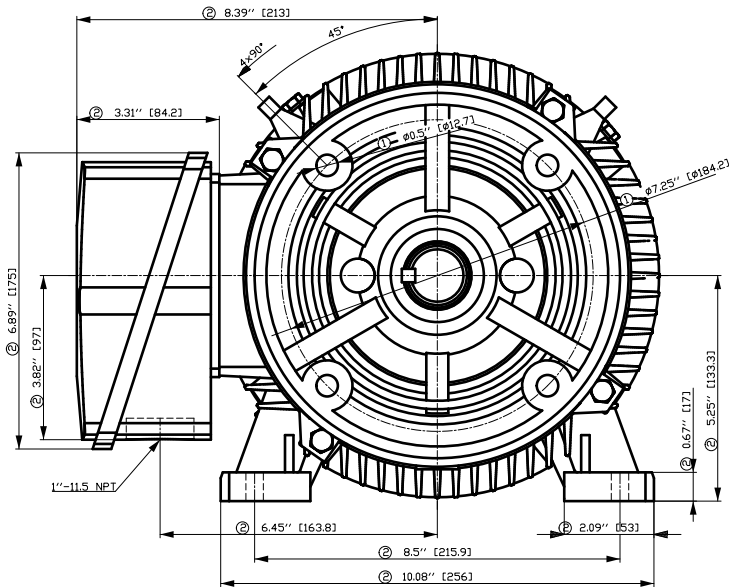

- ① Tolerances according to NEMA std.
- ② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GB 19.
- ③ Not according to NEMA std.

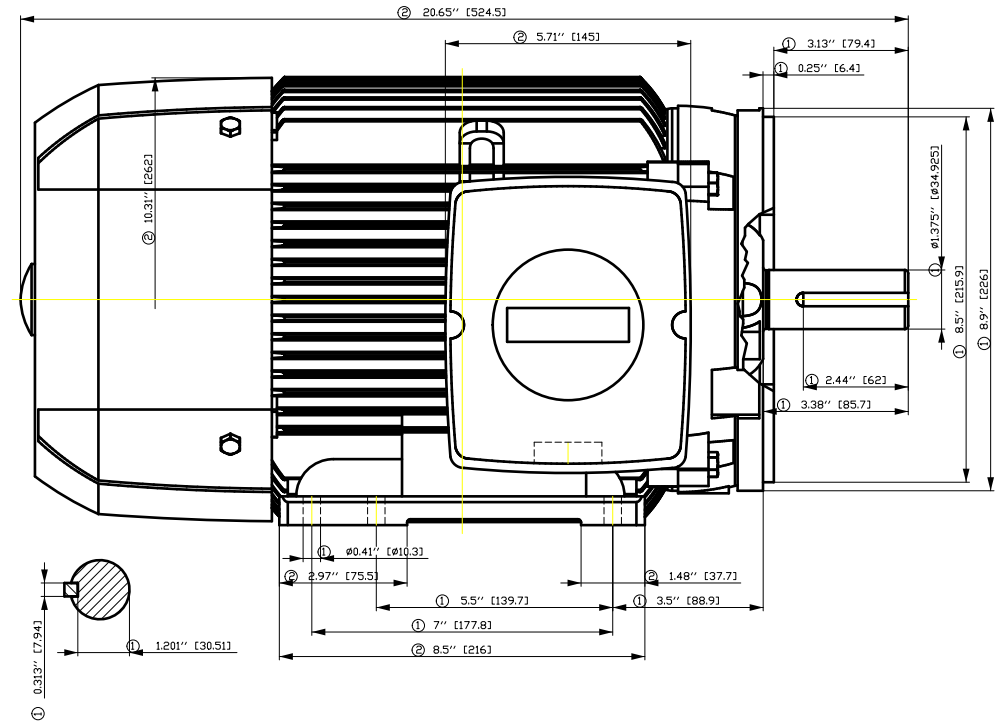


Tolerance	Surface	Material	Weight -	Scale  mm
1LE2121-2AA21-4EA3 -	Author	Dimensional drawing Maßzeichnung		
	Creator DTK			
	Approval			
	Department			
	Change Order	MLFB	Doc. Type	
SIEMENS	Doc. State 9/17/20	Item No	Paper Size A3	
	Revision Index RS	Doc. No	1st Language en 2nd Language de	
© Siemens AG 2018	Project No -	Ref No -	Sheet 1 of 1	

SIEMENS INDUSTRY, INC.

HP 10 VOLTS < 600V RPM 3600 TYPE GP100A
HZ 60 PHASE 3 FRAME 215T NEMA B

TORQUE & CURRENT VS. SPEED

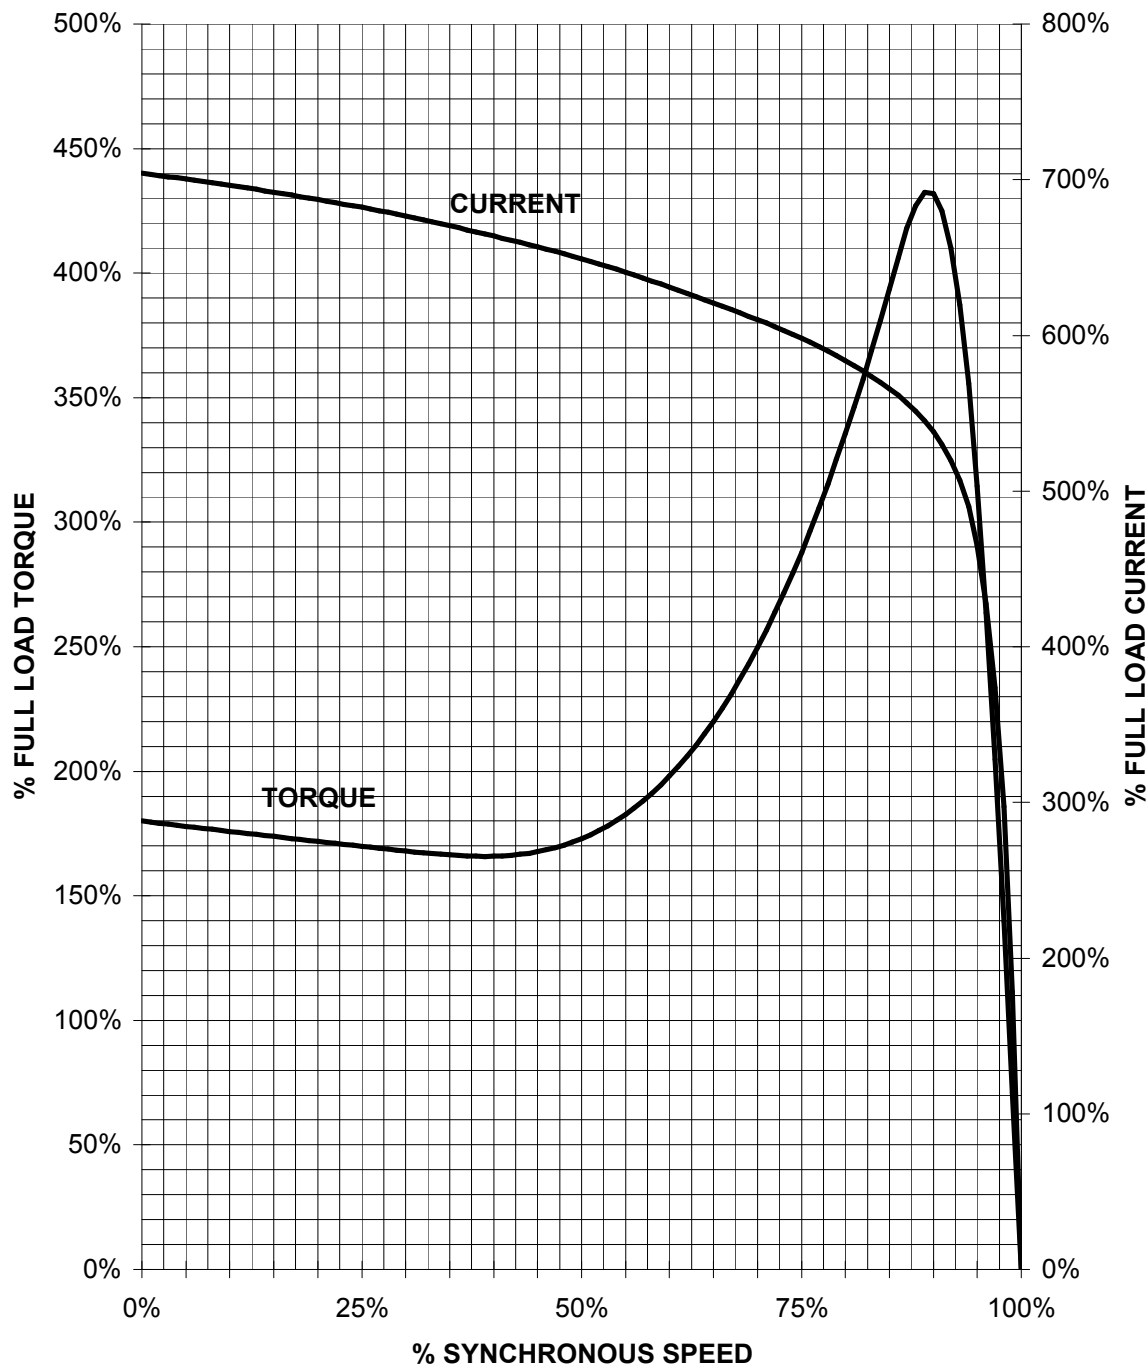


CUSTOMER: ORDER#:

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.
REV. 1

10 HP 3600 RPM 215 FRAME 460 VOLTS 3 PHASE NEMA DESIGN B


SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
GP100A NP

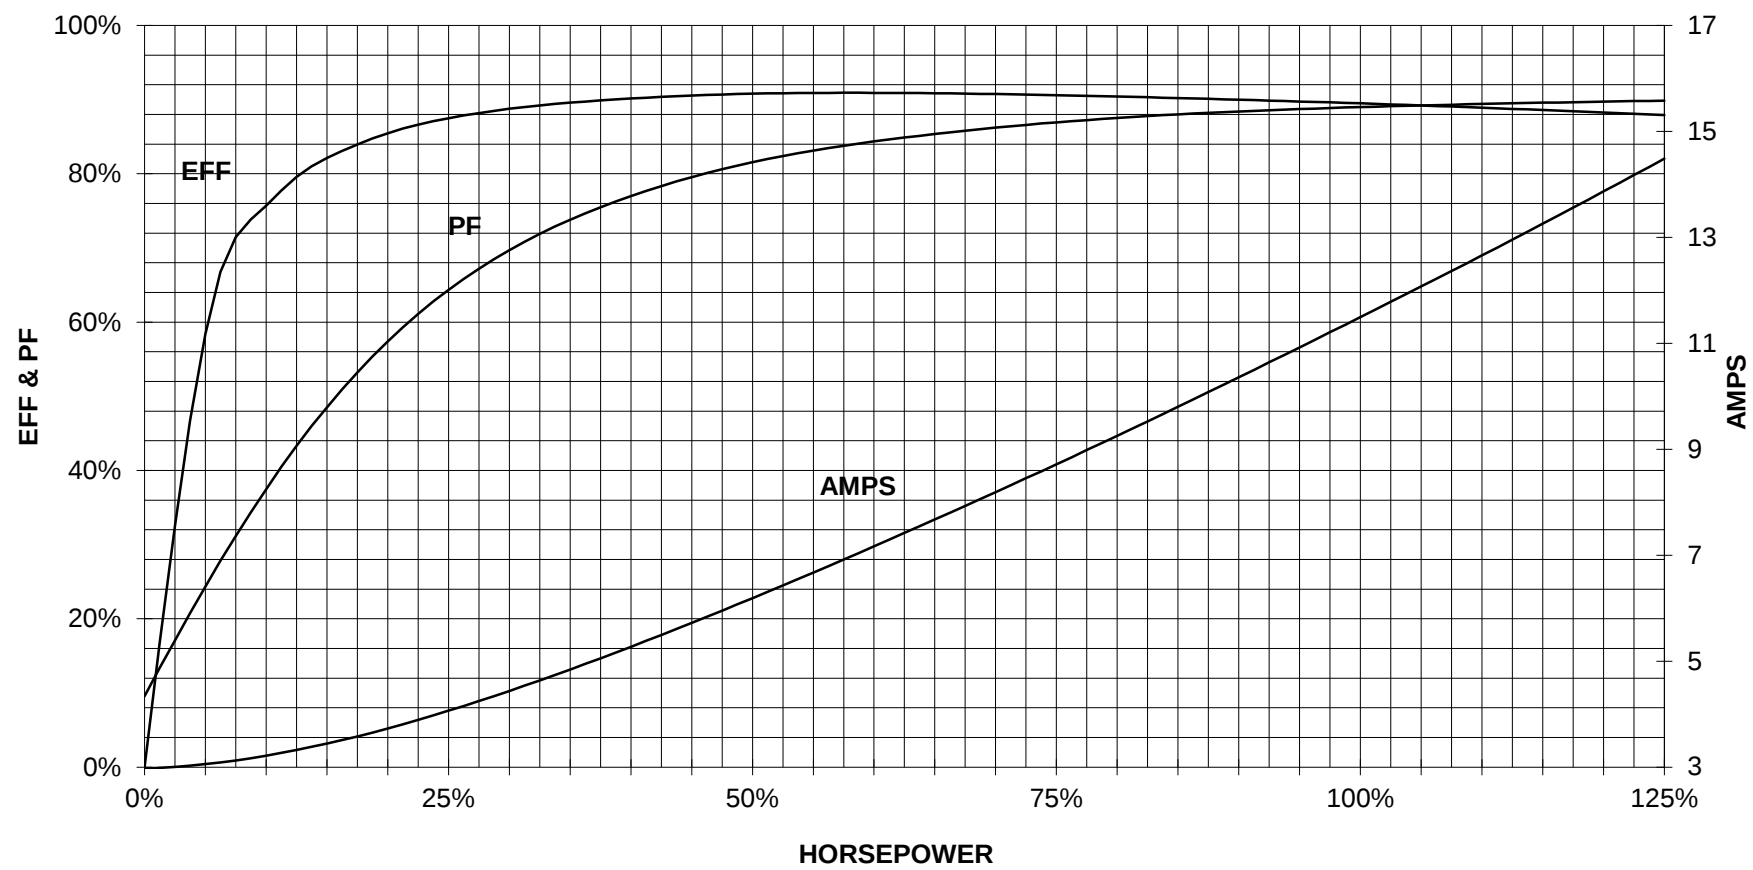

CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

Main terminal diagram



9 LEAD WYE						
Volts	LINES			CONNECTED TOGETHER	CONN.	
	L1	L2	L3			
LOW	T1 T7	T2 T6	T3 T9	T4 T5 T6	Y Y	
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y	

responsible dep.
DI MC LVM

technical reference

created by

approved by

project

SIEMENS

document type
Wiring Diagram

title
1LE2121-2AA21-4EA3

document status

free

document number

customer