



NEMA Motor Data

Ordering data : 1LE2221-1AA21-4GA3

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Nameplate Data	Mounting and motor protection
----------------	-------------------------------

Type	GP100 - NEMA Premium Efficiency		
HP	1.5	Rating	Cont.
Voltage	(14) 208-230/460V,	Ins. Class	Class F (Standard)
Amps	4.0 / 2.0 A	S.F.	1.15
FL RPM	3525	Amb. Temp.	40 deg C
FL Efficiency	84.0 %	Temp. Rise	Class B
FRAME	143TC	kVA Code	L
DE AFBMA	25BC02JPP30	NEMA Des	B
ODE AFBMA	25BC02JPP30	Mtr WT	56.00
60 Hertz	3 Ph	TEFC	IP 35

Type of construction	(G) Round body - C-Face
Motor protection	(A) No winding protection
Terminal box design	(3) Mounting - F-1

Bearing Data		
	DE	ODE
Bearing Size	6205 ZZ C3 S0	6205 ZZ C3 S0
Bearing Type	Ball Bearing	Ball Bearing
AFBMA	25BC02JPP30	25BC02JPP30

Typical Performance Data					
Load	No Load	1/2	3/4	Full Load	LRC
Efficiency		80.0 %	83.2 %	84.0 %	
Power Factor		64.2	77.0	83.6	
Current (A)	1.1 A	1.4 A	1.6 A	4.0 / 2.0 A	19.0 A
Inverter Duty	VT	20:1	CT	4:1	

Mechanical Data				
SAFE STALL TIME	HOT (s)	14	COLD (s)	19
Rtr wt (lbs)	8.16	Rtr WK2	0.05	
FLT (lb-ft)	2.200	LRT	273	BDT 455
Ext Load Inertia (WK2) Capability		105.0 lb-ft²		

Typical Noise Data									
--------------------	--	--	--	--	--	--	--	--	--

A-weighted Sound	Octave Band Center Frequencies Hertz (Hz)								
Pressure Level	125	250	500	1000	2000	4000	8000	SPL	74
at 3 feet	32	52	69	70	67	60	51	SPwrL	83



Wiring Connection Information					
-------------------------------	--	--	--	--	--

Special design :					
------------------	--	--	--	--	--

Description	3 PHASE - 9 LEAD - WYE				
Voltage	L1	L2	L3	Connected together	
LOW	T1 T7	T2 T8	T3 T9	T4 T5 T6	Y Y
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y

Lubrication Information	
-------------------------	--


Manufacturer	Mobil Polyrex EM or equal
Type	Polyurea (standard)
DE Capacity (oz.)	0.30
ODEnd Capacity (oz.)	0.30

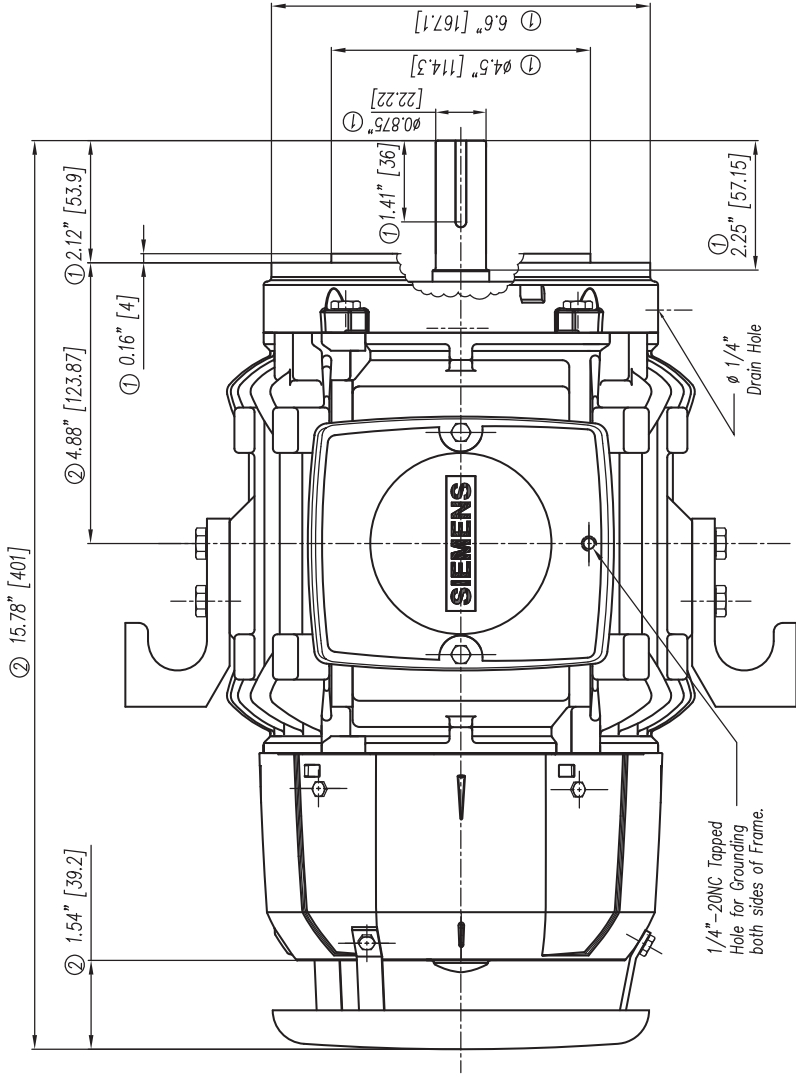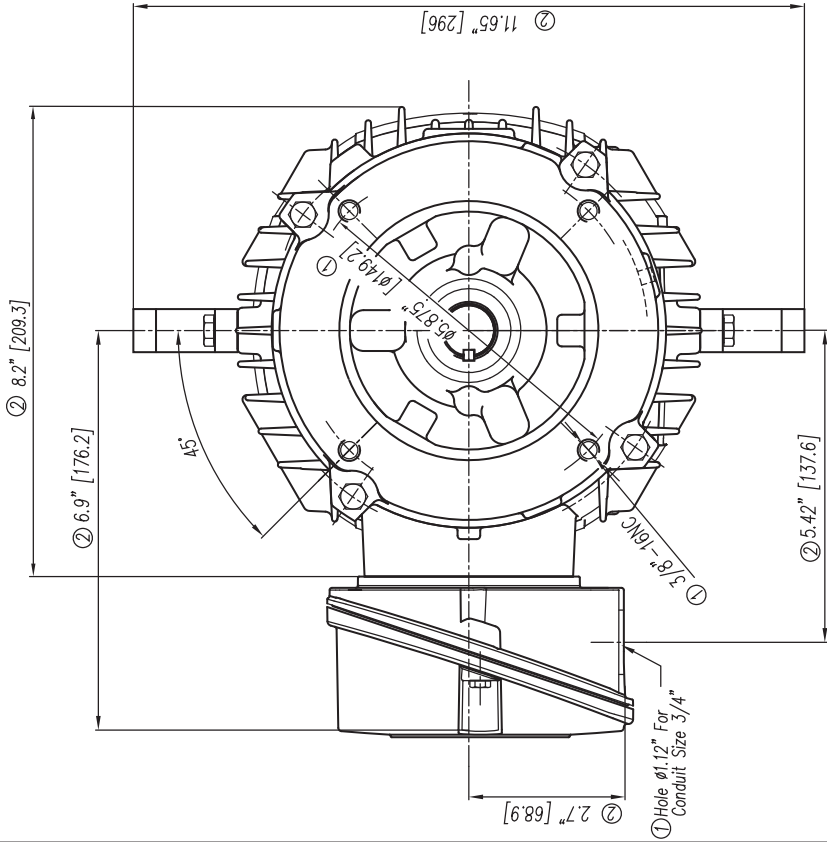

- ① Tolerances According to NEMA Std.
② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GTB 19.
③ Not According to NEMA Std.

- ① Tolerancias acorde a NEMA Std.
② Todas estas dimensiones correspondientes a ensambles y fundición en bruto tendrán una tolerancia según DIN 1686-GTB-19
③ No Acorde a NEMA Std.

CERTIFIED PRINT/CERTIFICACION				
CUSTOMER/CLIENTE				
FOR ORDER COMPANY	SUN/ORDEN CLIENTE			
IP	ENV	FRAME/ENK	TYPE/TPD	REV

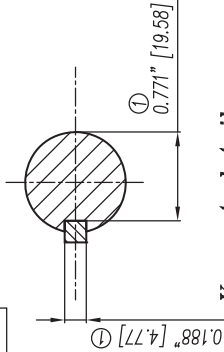


Keyseat detail
Detalle Cuñero

Tol. in mm. acc. to/Tol. en mm. según DIN-1686-GTB-19		European Projection/ Proyeccion Europea			Modific.	a)Se cambió formato a Inglés-Español y se especificó tipos en los que aplica este dibujo. a)Changed the format to English-Spanish and was specified in what kind of motors apply this drawing.	
Over/desde		to/hasta		Dim. in inches/Dim. en pulg.			
---	18	18	30	± 4.5	± 4.7		
	30	30	50	± 5	± 5		
	50	80	120	± 6	± 6.5		
	120	180	250	± 7	± 7.5		
	180	250	315	± 8	± 8.5		
	250	315	400	± 9	± 9.5		
	315	400	500	± 10	± 10		
	400	500	630	± 11	± 11.5		
	500	630	800	± 12	± 12.5		
	630	800	1000	± 13	± 13.5		

SIEMENS INDUSTRY, INC.

HP 1,5 VOLTS < 600V RPM 3600 TYPE GP100
HZ 60 PHASE 3 FRAME 143T NEMA B


TORQUE & CURRENT VS. SPEED

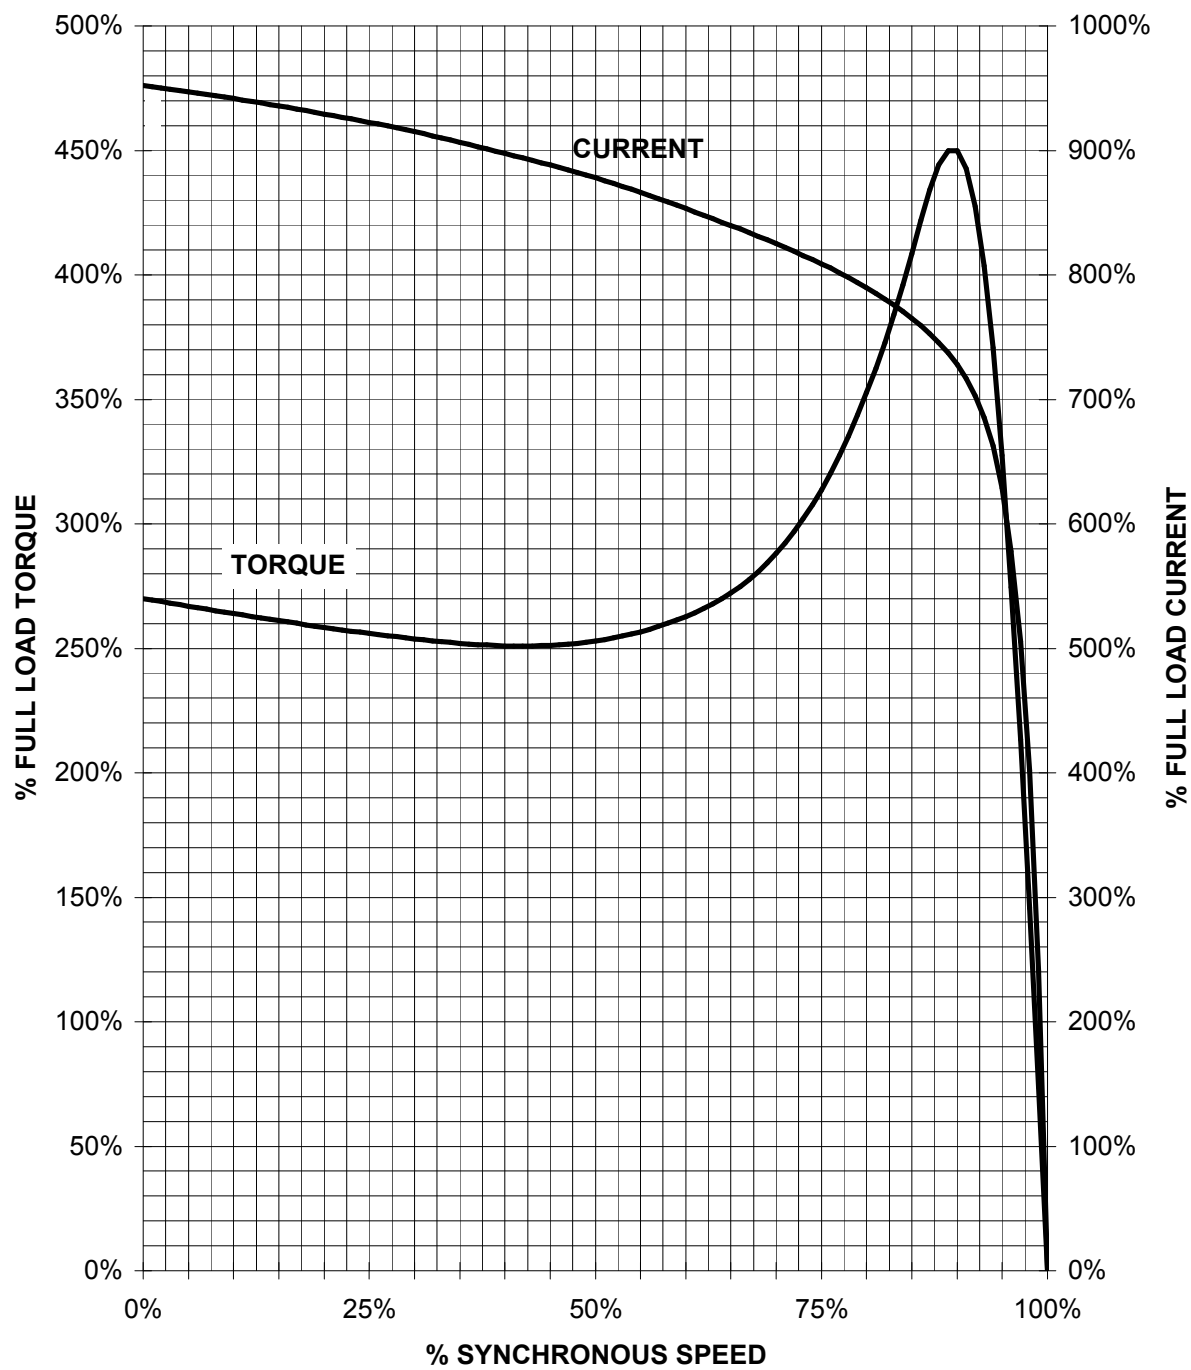

CUSTOMER: _____ ORDER#: _____

1.5 HP 3600 RPM 143T FRAME 460 VOLTS 3 PHASE NEMA DESIGN B

SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
GP100

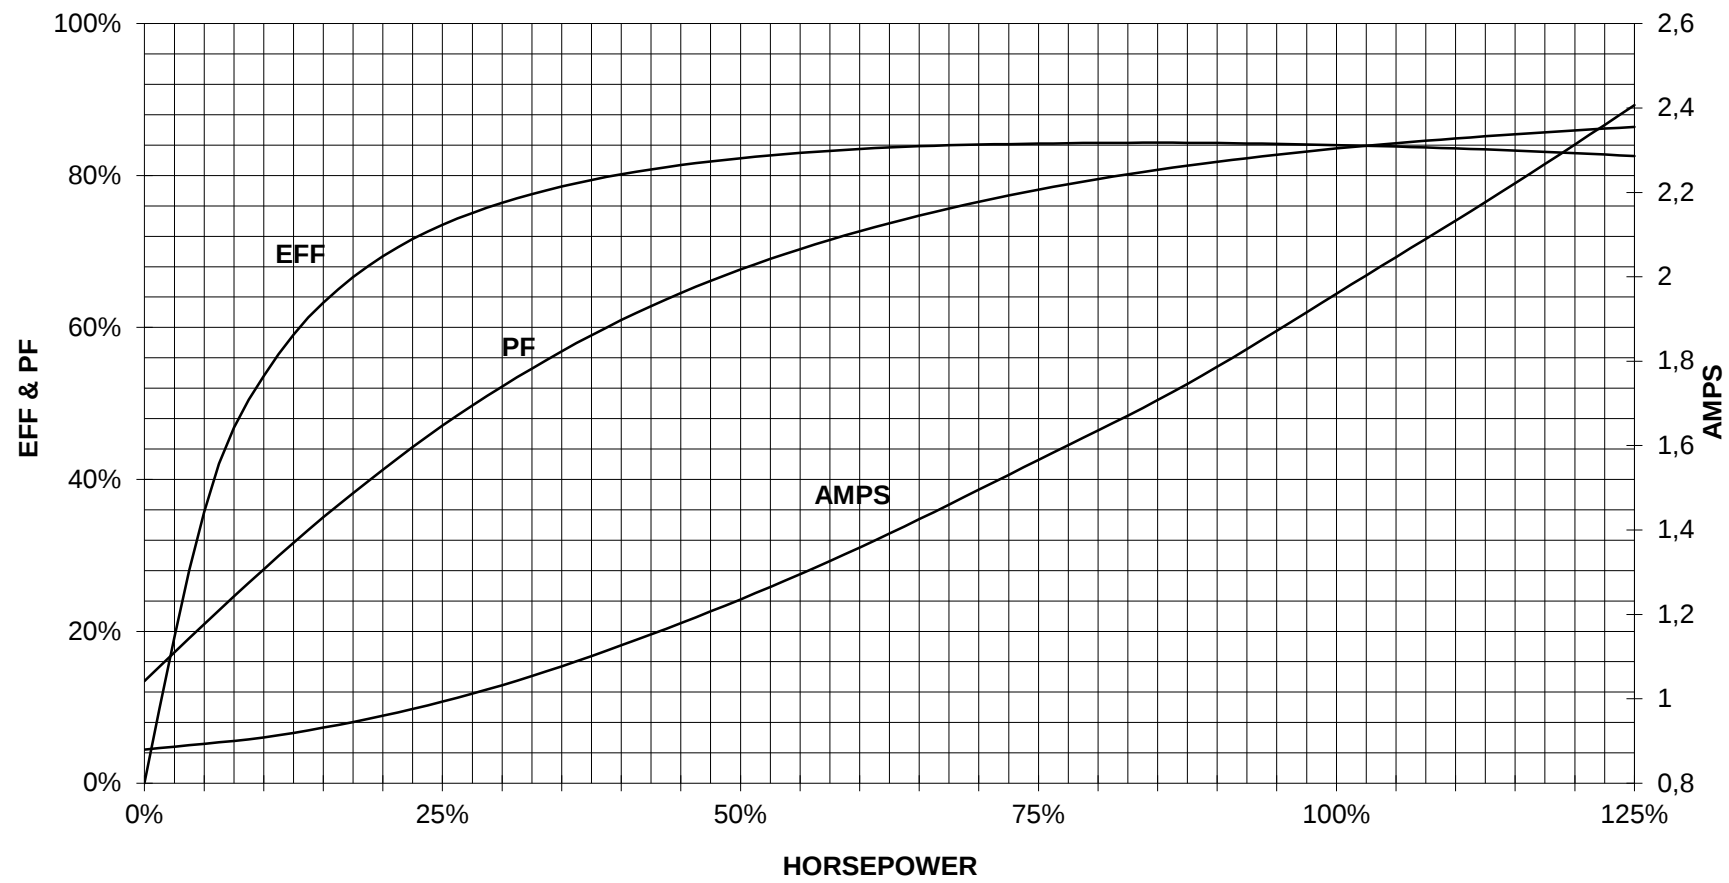


CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

3 PHASE - 9 LEADS - WYE

VOLTS	LINES			CONNECTED TOGETHER	CONN.
	L1	L2	L3		
LOW	T1 T7	T2 T8	T3 T9	T4 T5 T6	Y Y
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y

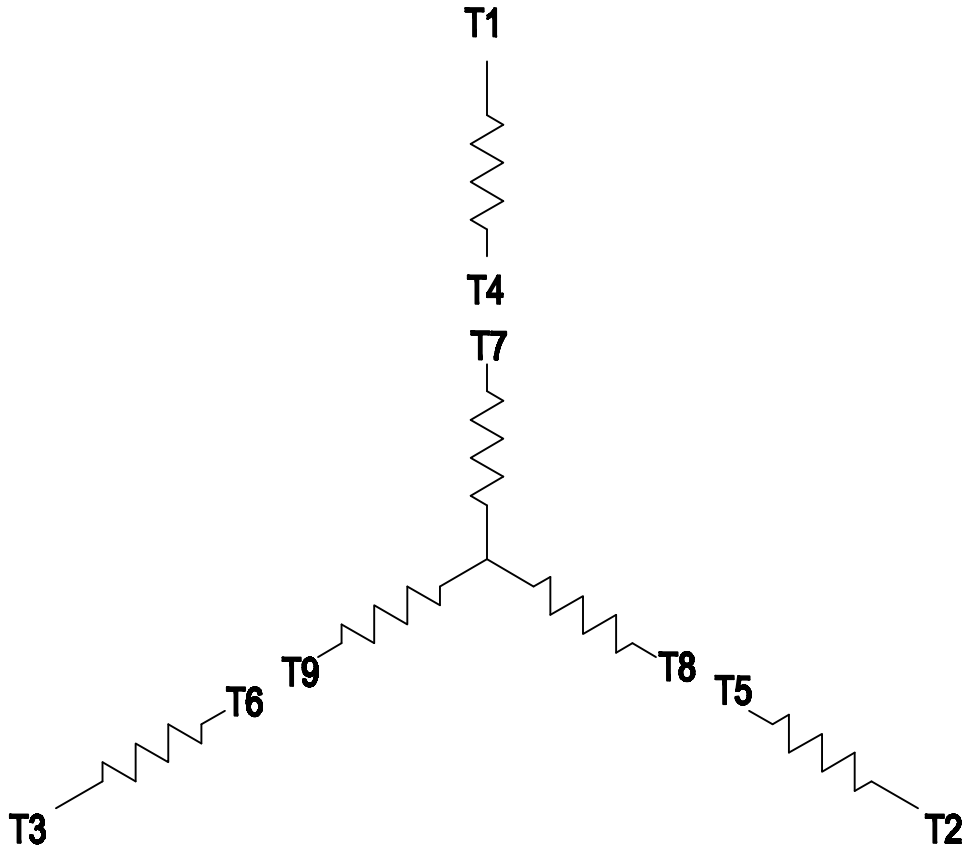

THIS IS A CAD DRAWING
DO NOT MAKE MANUAL CHANGES

01 09-27-07

TYPE

-CONFIDENTIAL-

PROPERTY OF

Siemens Energy & Automation, Inc.
Industrial Motor Division - Little Rock, AR

FRAME

HP

NAME

WIRING DIAGRAM

Customer

VOLTS

RPM

HZ

PH

3

PO #

SO #

DRAWN

9.24.07

DATE

JRH

CHECKED

DATE

APP

DATE

SHEET

1 OF 1

Sim. To

PART NO.

51-382-114-501

A