

Data sheet for three-phase Squirrel-Cage-Motors

Totally Enclosed Fan Cooled (TEFC)



MLFB-Ordering data: 1LE2221-1AB31-4GA3

Motor type: GP100 - NEMA Premium Efficiency

Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

U [V]	Δ / Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]						Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque	T _A /T _N	T _k /T _N
						4/4	3/4	1/2	0	LRC		4/4	3/4	1/2	4/4	3/4	1/2	[lb-ft]	LRT [%]	BDT [%]
460	Y	60	1.50	1.00	1,740	2.10	1.70	1.40	1.10	19.0		86.5	87.0	85.8	77.3	71.8	58.5	4.5	333	422
230	YY	60	1.50	1.00	1,740	4.20	3.37	2.80	2.20	38.0		86.5	87.0	85.8	77.3	71.8	58.5	4.5	333	422

Frame Type 145TC	Type of constr.: (G) Round body - C-Face	Ins. Cl.: F	Motor Prot.: (A) Without Protection	NEMA Des.: B	S.F.: 1.15
Mtr WT: 69 lbs	Mounting: (3) F-1, Standard Floor Mount, T. Box LHS	Temp. Rise Cl.: B	Amb. Temp.: +40 to -20 °C @1000 m	kVA: M	IP55

Mechanical data

WK2

Rotor Moment of Inertia: 0 Lb-ft²

Ext Load Inertia Capability: 8.6 Lb-ft²

Safe Stall Time

Hot: 15.0 s

Cold: 21.0 s

Typical Noise Data

A-weighted Sound

Sound Pressure: 62.0 dB(A)

Sound Power: 50.0 dB(A)

Octave Band Center Frequencies Hertz

	250	500	1000	2000	4000	8000	Hz
SPL@3 feet	37.0	40.0	49.0	45.0	37.0	31.0	dB(A)

Bearings

	DE	NDE
Bearing size:	6205 ZZ C3 S0	6205 ZZ C3 S0
Bearing Type:	Ball Bearing	Ball Bearing
AFBMA:	25BC02JPP30	25BC02JPP30

Grease

Capacity:	0.10 oz	0.10 oz
Type:	Exxon Mobile EM	
Thickener:	Polyurea	

Frame

Frame material:	cast iron
Coating (paint finish):	Standard Paint
Color, paint shade:	RAL 7030

Terminal box

Terminal box position: (3) F-1, Standard Floor Mount, T. Box LHS

Lead Wire Connection

Description:	9 LEAD - WYE				
Voltage	L1	L2	L3	Connected together	
LOW	T1 T7	T2 T8	T3 T9	T4 T5 T6	Y Y
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y

Ventilation Type

Type of Cooling:	TEFC
Fan Material:	Polypropylen
Fan Rotation:	Bidirectional

Additional information

VFD Operation:	CT: 4:1	VT: 20:1
Area: classification:	without	

Notes

I_L/I_N = locked rotor current / current nominal T_k/T_N = break down torque / nominal torque
T_k/T_N = locked rotor torque / torque nominal ¹⁾ Value is valid only for DOL operation with motor design IC411

Technical data are subject to change! There may be discrepancies between calculated and rating plate values.


Generated:
2020-09-17 01:44

刀模密“口
• 用特为造
文全造
。 业行
机。


Tous droits réservés. Toute réimpression, reproduction ou utilisation non autorisée sans la permission écrite de la Siemens AG est formellement interdite. Toute utilisation de ce document sans la permission écrite de la Siemens AG est formellement interdite. Toute utilisation de ce document sans la permission écrite de la Siemens AG est formellement interdite. Toute utilisation de ce document sans la permission écrite de la Siemens AG est formellement interdite.

Wiederholte Verstoß gegen die Nutzungsrechte der Siemens AG kann strafrechtliche Verfolgung auslösen. Die Siemens AG ist nicht haftbar für Schäden aus der Verletzung des Patentrechts, der Markenrechte, der Urheberrechte oder sonstiger Rechte aus dem Gebrauch dieses Dokuments. Die Siemens AG ist nicht haftbar für Schäden aus der Verletzung des Patentrechts, der Markenrechte, der Urheberrechte oder sonstiger Rechte aus dem Gebrauch dieses Dokuments.

Confidencial. Toda reproducción o uso no autorizado sin el consentimiento escrito de Siemens AG quedan expresamente prohibidos. Toda reproducción o uso no autorizado sin el consentimiento escrito de Siemens AG quedan expresamente prohibidos. Toda reproducción o uso no autorizado sin el consentimiento escrito de Siemens AG quedan expresamente prohibidos.

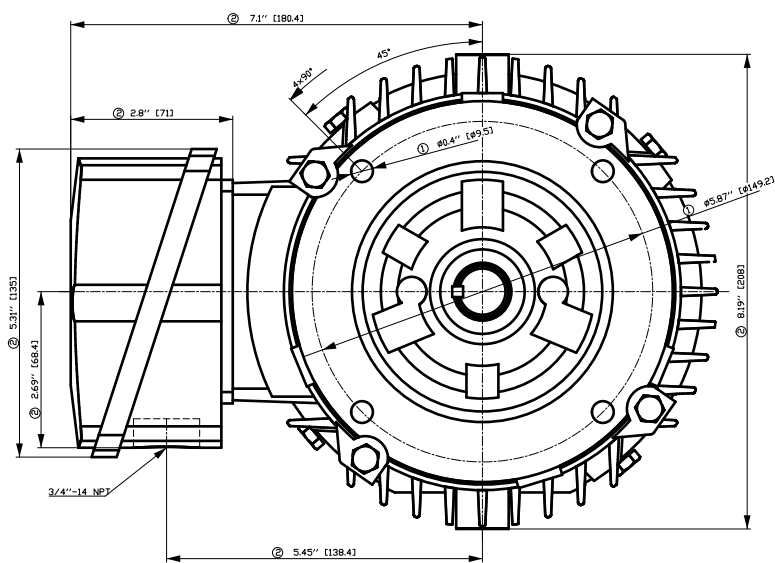

- ① Tolerances according to NEMA std.
- ② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GTB 19.
- ③ Not according to NEMA std.

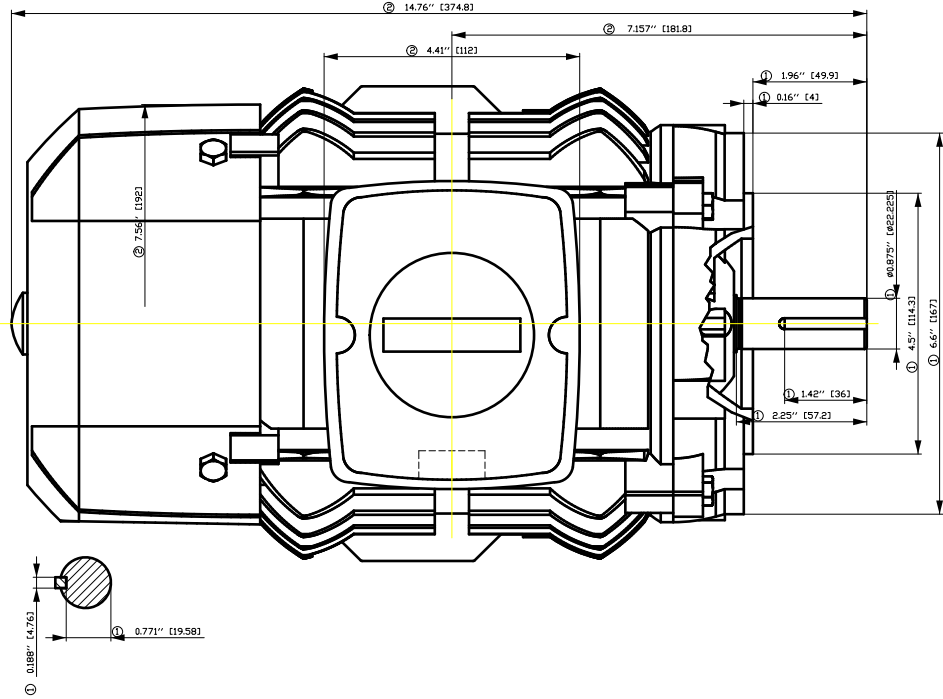


Tolerance	Surface	Material	Weight	Scale
1LE2221-1AB31-4GA3	Author Creator Approval Department Change Order	Dimensional drawing Maßzeichnung	-	mm
-	DTK			
SIEMENS	Doc. State	9/17/20	Item No	Paper Size
	Revision	Index	Doc No	1st Language
				2nd Language
	Project No	-	Ref No	Sheet
© Siemens AG	2018			1 of 1

SIEMENS INDUSTRY, INC.

HP 1,5 VOLTS < 600V RPM 1800 TYPE GP100
HZ 60 PHASE 3 FRAME 145T NEMA B


TORQUE & CURRENT VS. SPEED

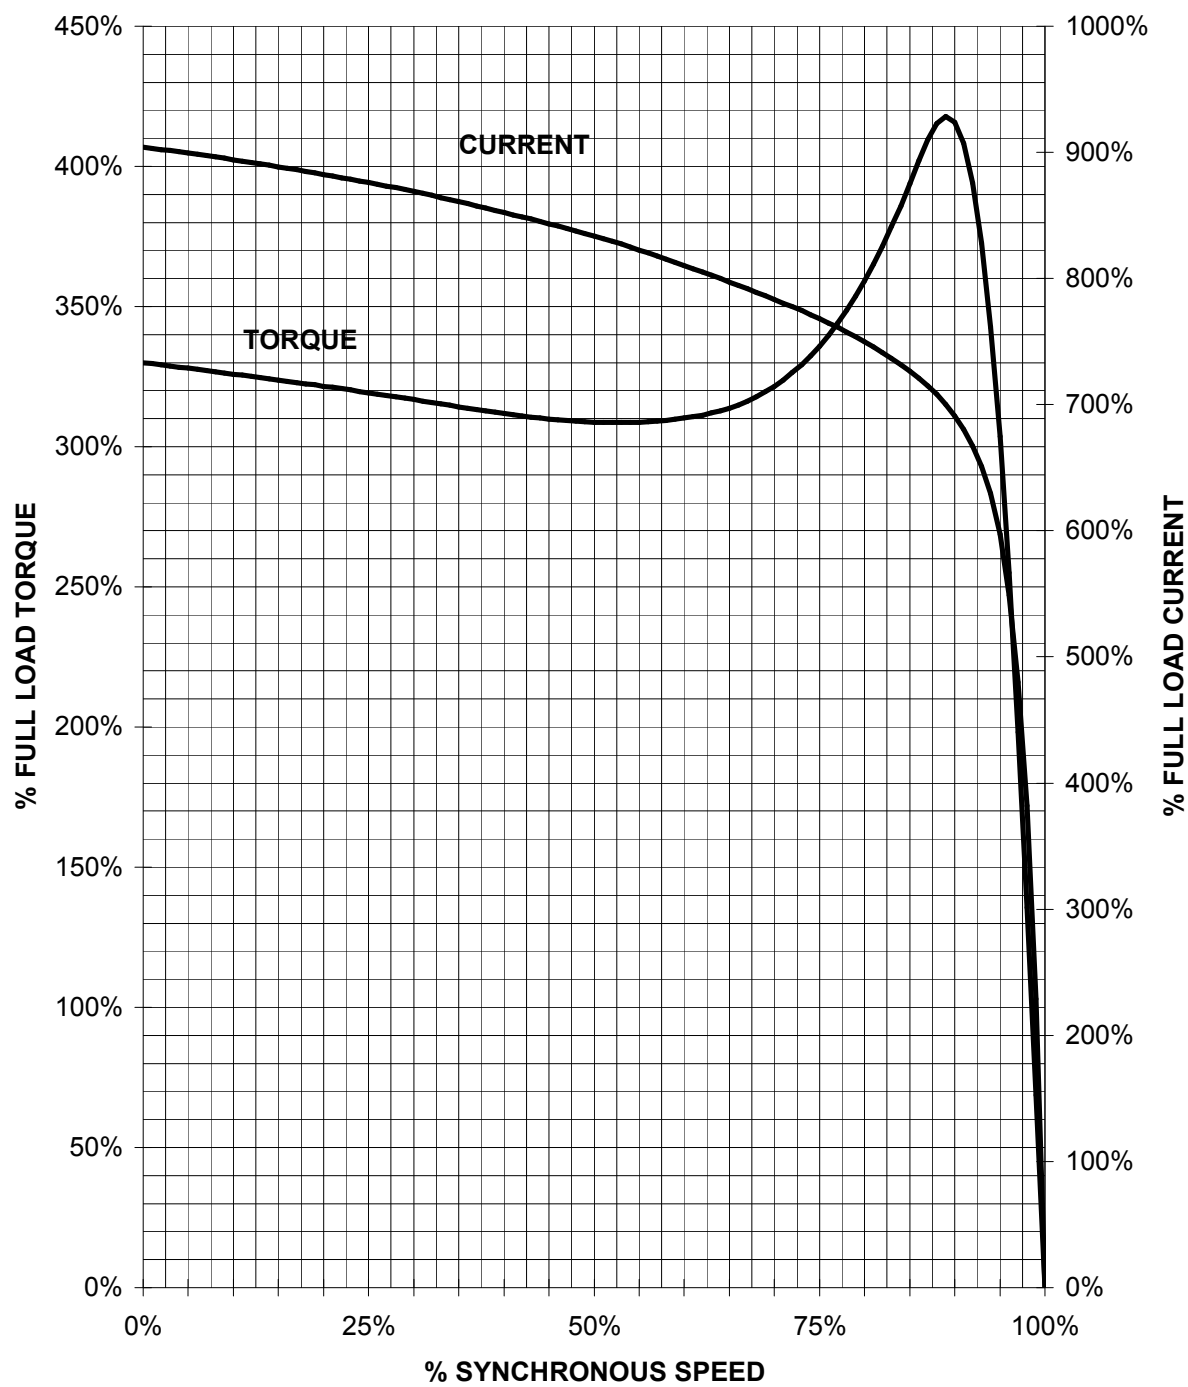

CUSTOMER: _____ ORDER#: _____

1.5 HP 1800 RPM 145T FRAME 460 VOLTS 3 PHASE NEMA DESIGN B

SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
GP100

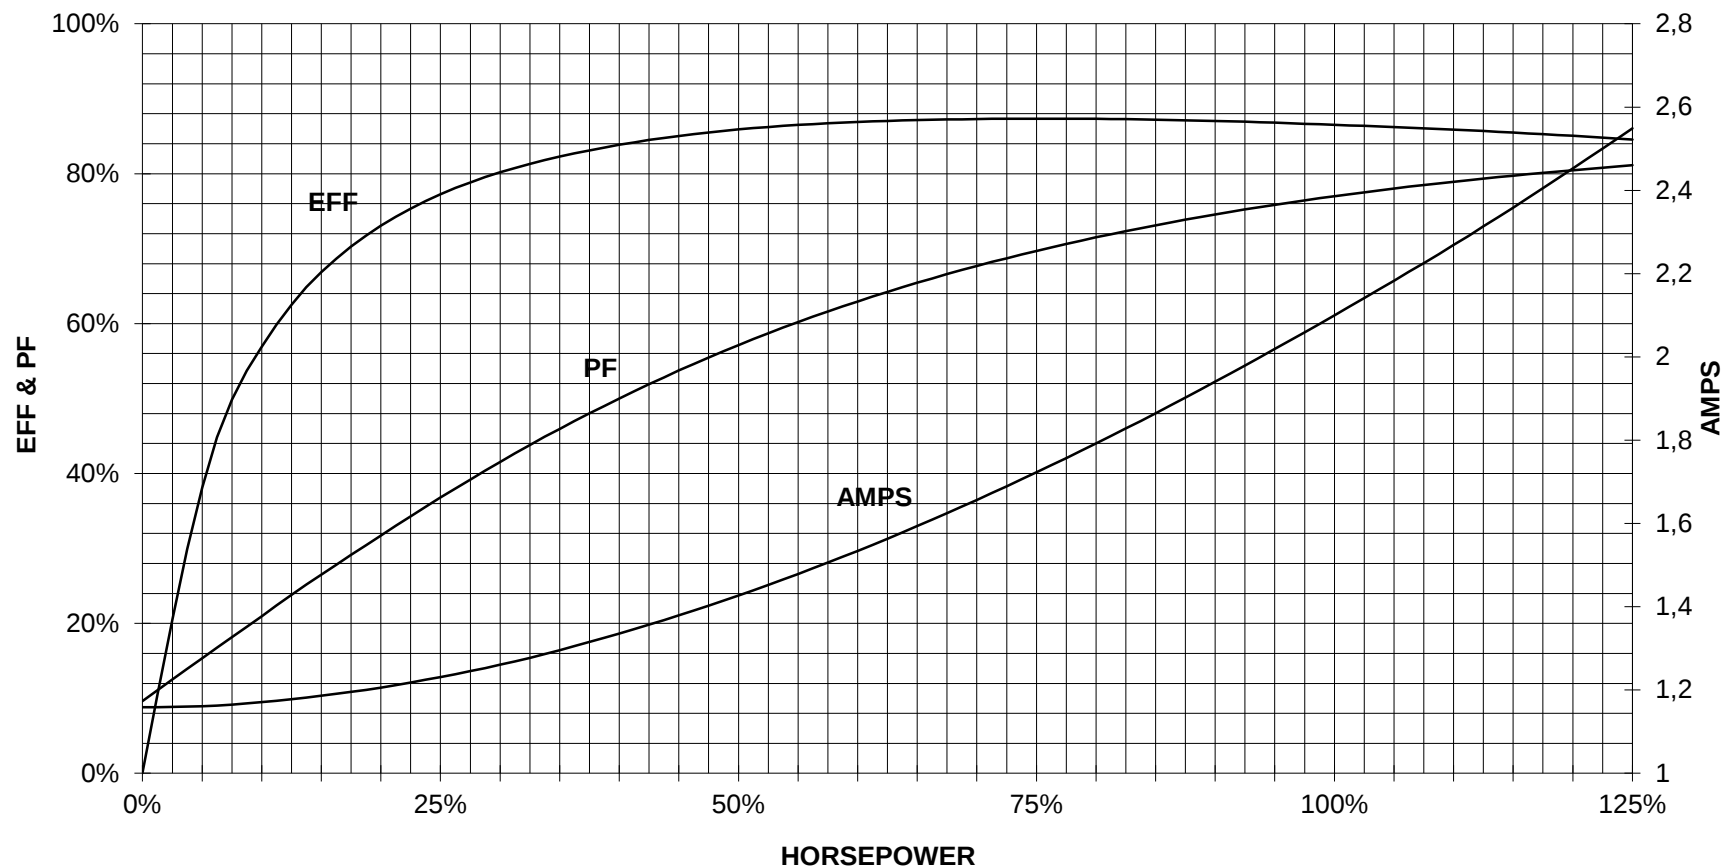


CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

REV. 1

Main terminal diagram



9 LEAD WYE						
Volts	LINES			CONNECTED TOGETHER	CONN.	
	L1	L2	L3			
LOW	T1 T7	T2 T6	T3 T9	T4 T5 T6	Y Y	
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y	

responsible dep. DI MC LVM	technical reference	created by	approved by	project			
	document type Wiring Diagram	1LE2221-1AB31-4GA3		document status free		customer	
	title			document number			
© Siemens AG 2019				rev. 01	creation date 12/03/2019	language en	Page 1/1