

Comp.dev.Emer.stop/em.swit.off but.front

Part no.


M22-PVS/K01

Article no.

216514



Delivery programme

Range			RMQ-Titan (drilling dimensions 22.5 mm)
Basic function			Emergency stop buttons
Single unit/Complete unit			Complete unit
Description			Tamper-proof according to ISO 13850/EN 418 With 1 key Individual lock mechanism MS1 Not suitable for master key systems Release by using the key
Mushroom colour (yellow base)			Red
Auxiliary contacts:  = safety function, by positive opening to IEC/EN 60947-5-1			
N/C = Normally closed			1 N/C 
Contact sequence			
Front ring			Bezel: Silver
Connection to SmartWire-DT			no
Notes  BAUART GEPRÜFT TYPE APPROVED			

Approbationen

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification
Degree of Protection

IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
E29184
NKCR
012528
3211-03
UL Listed, CSA certified
UL/CSA Type 3R, 4X, 12, 13

General

Standards			IEC/EN 60947 VDE 0660
Lifespan, mechanical	Operations	$\times 10^6$	> 0.1
Operating frequency	Operations/h		 500
Actuating force		n	50
Protection type			IP66, IP69K
Climatic proofing			Damp heat, constant to IEC 60068-2-78

			Damp heat, cyclic to IEC 60068-2-30
Ambient temperature		°C	
Open		°C	- 25 - + 70
Mounting position			As required
Mechanical shock resistance		g	50 Shock duration 11 ms Sinusoidal according to IEC 60068-2-27


Technische Daten nach ETIM 4.0


With lighting			No
Protection type (IP)			IP67
Unlocking method			Key-release
Mounting type			Flush mounting
Hole diameter		mm	22

CAD-Daten

Product standards CAD data:
 <http://eaton-moeller.partcommunity.com>

Dimensions

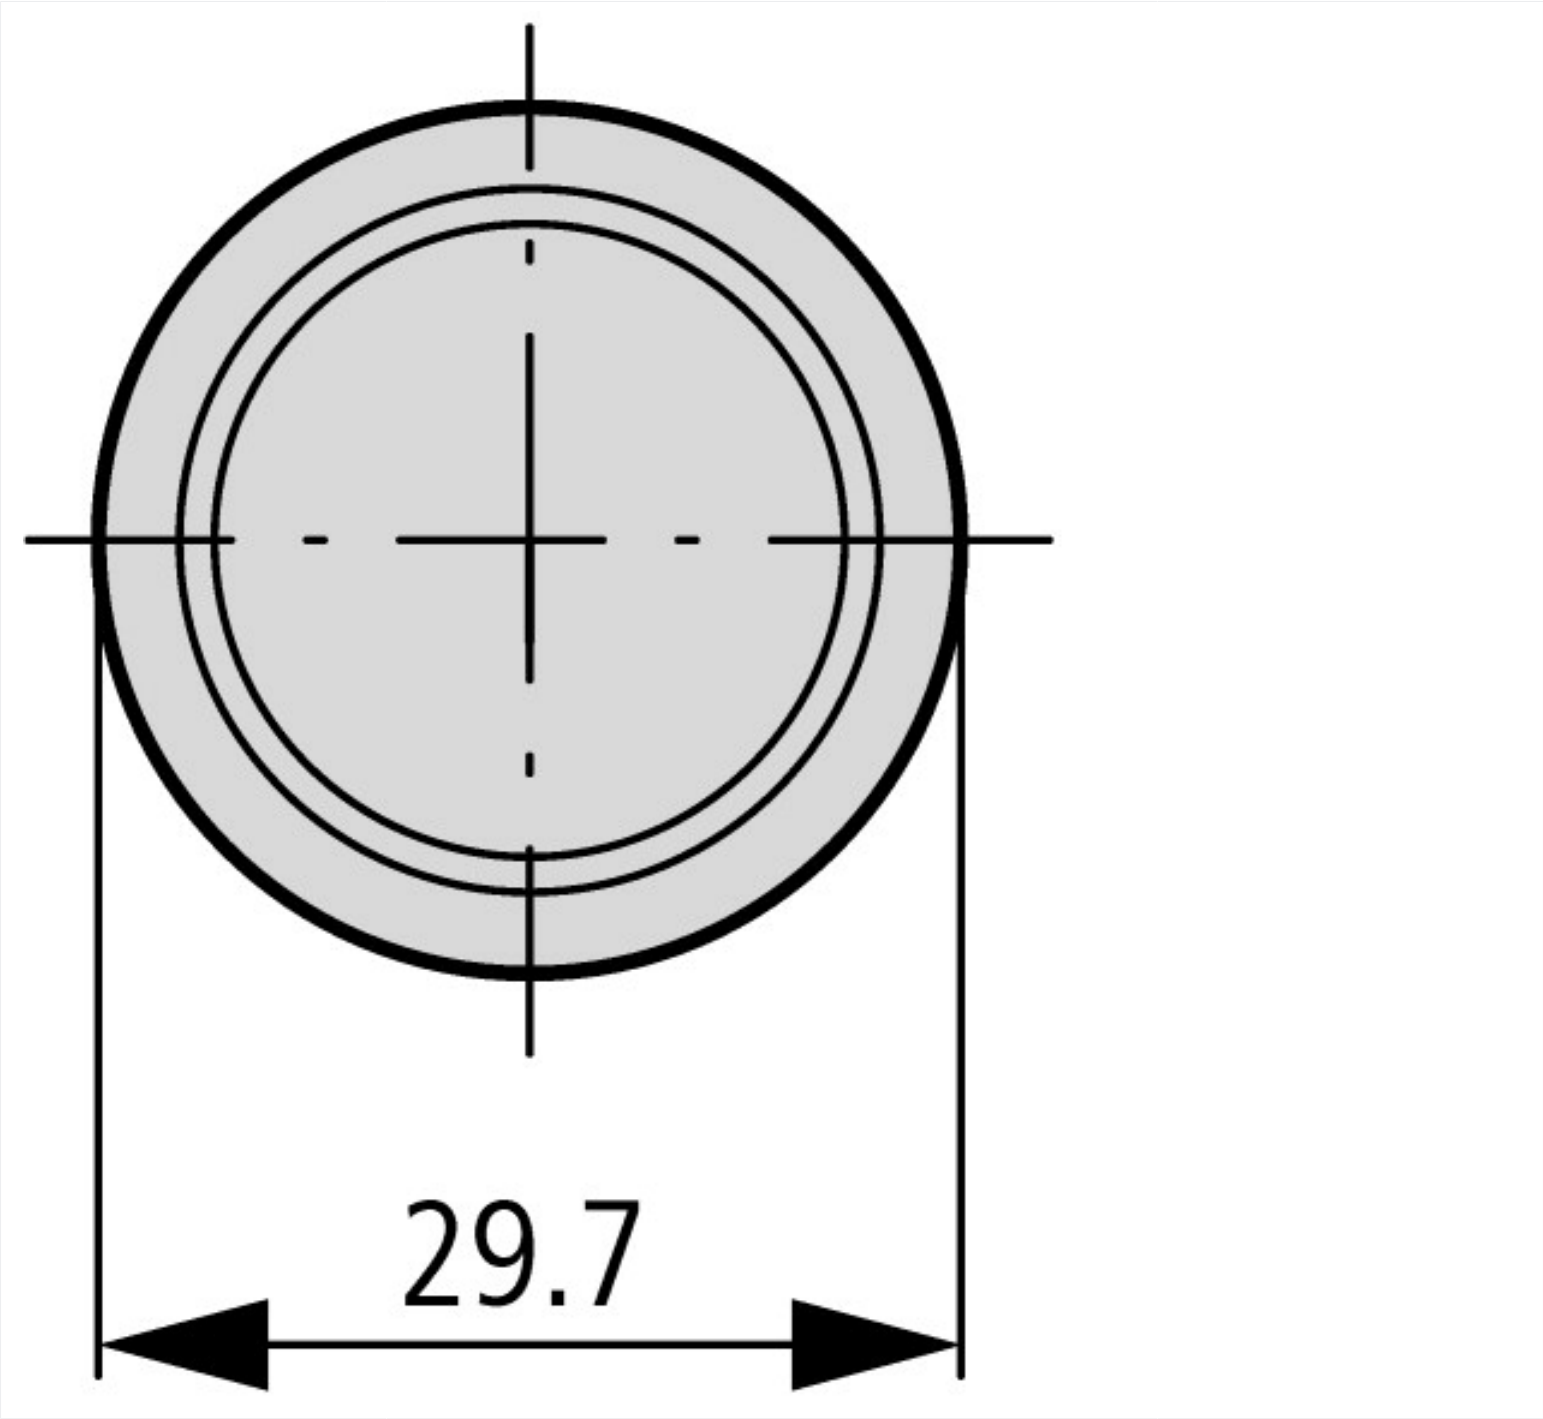

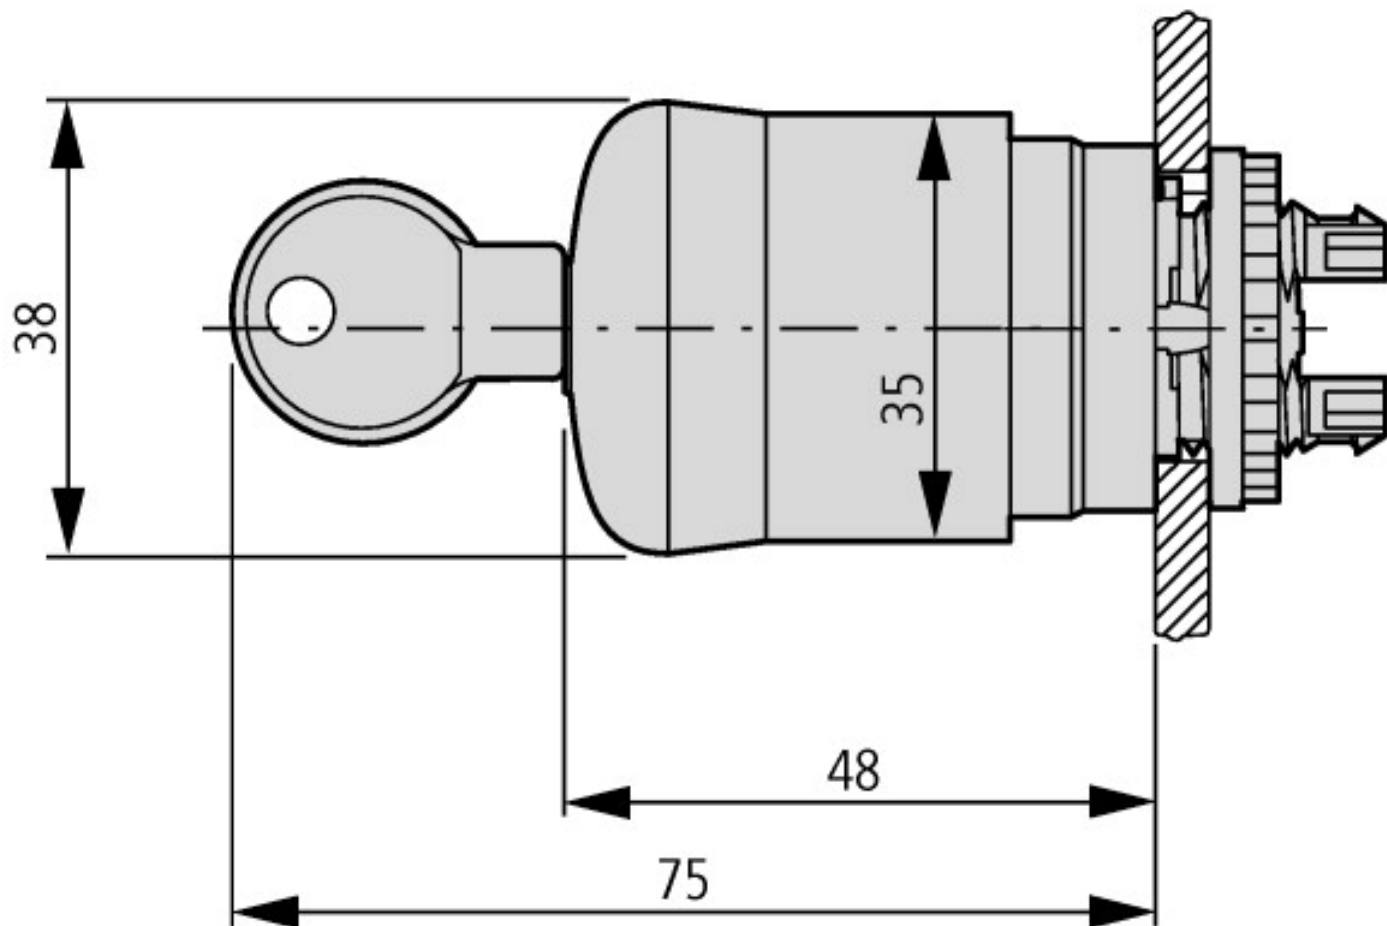

Additional product information (links)

AWA1160-1745 (IL04716002Z) The RMQ-Titan system

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17450510.pdf