



Shroud

Part no. M22-H1

Article no. 216548



Delivery programme

Range			RMQ-Titan (drilling dimensions 22.5 mm)
Basic function			Accessories
Accessories			Surface mounting enclosure
Basic function accessories			Shrouds
Single unit/Complete unit			Single unit
Material			Insulated material light
			Protection type only in combination with flush mounting plates M22-E...
Protection type			IP55
Number of locations		Qty.	1
Colour			
			
RAL Value			RAL 7035
Cable entry knockouts		Quantity x M20	3
Connection to SmartWire-DT			no

Approbationen

Product Standards	IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.	E29184
UL CCN	NKCR
CSA File No.	012528
CSA Class No.	3211-03
NA Certification	UL Listed, CSA certified
Degree of Protection	UL/CSA Type 3R, 4X, 12, 13



Technische Daten nach ETIM 4.0

Number of installable devices			1
Protection type (IP)			IP55



CAD-Daten

Product standards CAD data:	http://eaton-moeller.partcommunity.com
-----------------------------	---

Dimensions

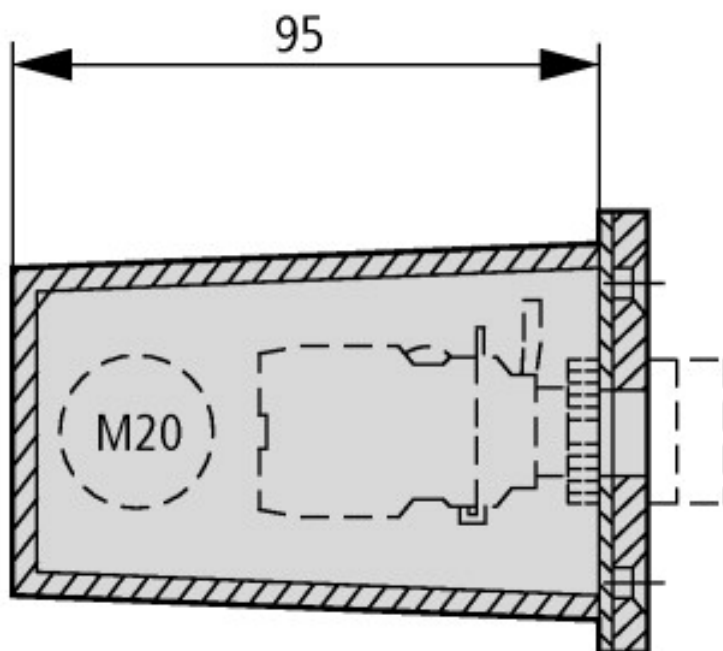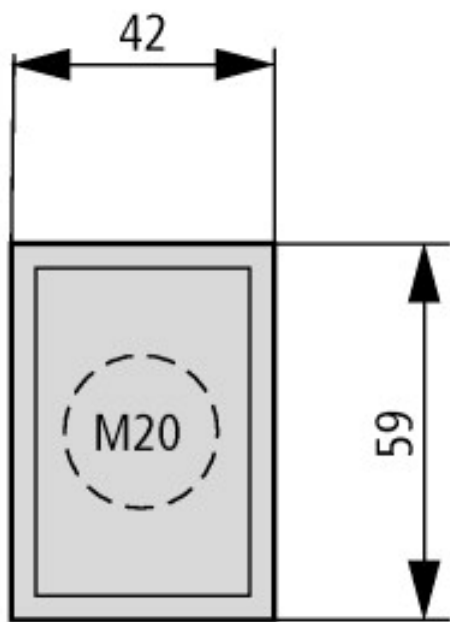

Cable gland: 3 x M20
Construction type: one-piece

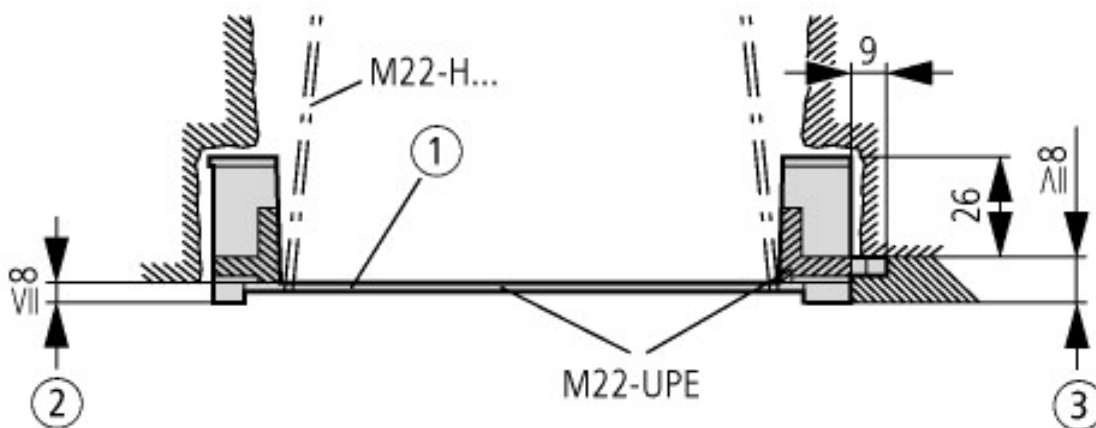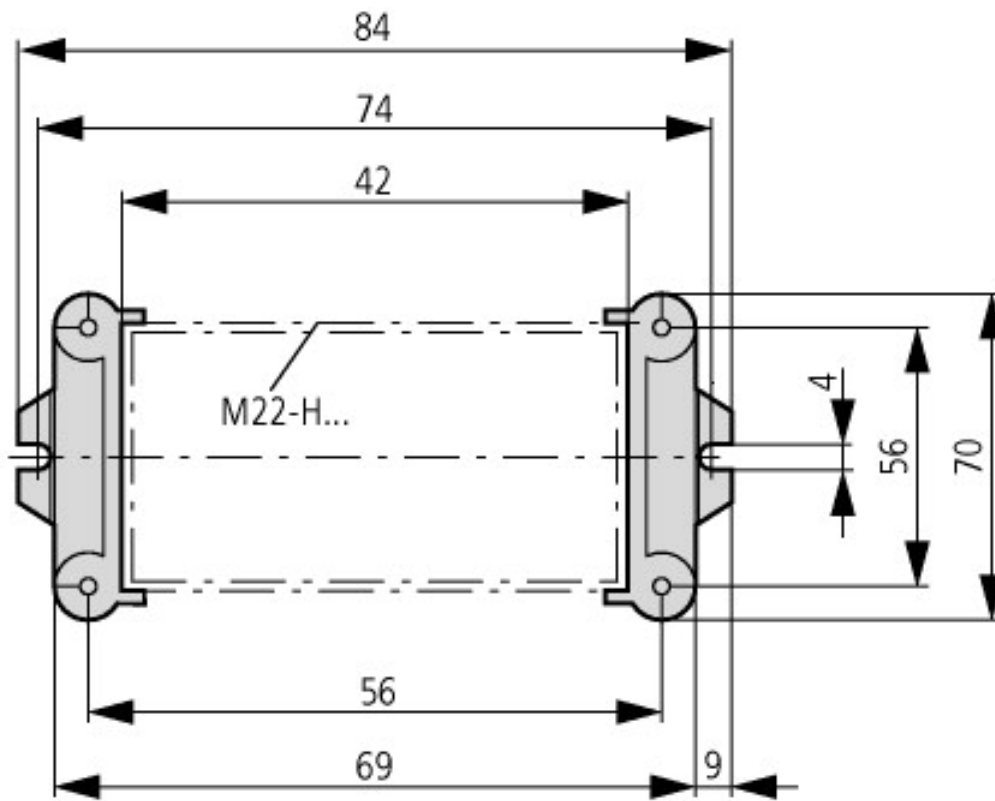

Shroud with M22-UPE set of plaster keys

- ① Blanking card for chasing in wall
- ② Plaster thickness less than 8 mm
- ③ Plaster thickness more than 8 mm

Additional product information (links)

AWA1160-1746 (IL04716003Z) The RMQ-Titan system

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17460805.pdf