



III.sel.switch act.,3 pos.,green

Part no. M22-WLK3-G


Article no. 216837



Bezel gold-plated →#274150

Stay-put/spring-return function, can be changed with coding parts M22-XC-Y Engineering

Delivery programme

|                            |  |  |                                                                                                                             |
|----------------------------|--|--|-----------------------------------------------------------------------------------------------------------------------------|
| Range                      |  |  | RMQ-Titan (drilling dimensions 22.5 mm)                                                                                     |
| Basic function             |  |  | Illuminated selector switch actuator                                                                                        |
| Single unit/Complete unit  |  |  | Single unit                                                                                                                 |
| Description                |  |  | 3 positions<br>Stay-put/spring-return function, can be changed with coding parts M22-XC-Y                                   |
| Function                   |  |  | momentary<br><br>left: 40°<br>right: 40° |
| Design                     |  |  | With thumb-grip                                                                                                             |
| Colour                     |  |  |                                                                                                                             |
|                            |  |  |                                         |
|                            |  |  | Green                                                                                                                       |
| Protection type            |  |  | IP66                                                                                                                        |
| Front ring                 |  |  | Front ring: titanium                                                                                                        |
| Connection to SmartWire-DT |  |  | yes                                                                                                                         |

Approbationen

|                      |                                                                              |
|----------------------|------------------------------------------------------------------------------|
| Product Standards    | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking |
| UL File No.          | E29184                                                                       |
| UL CCN               | NKCR                                                                         |
| CSA File No.         | 012528                                                                       |
| CSA Class No.        | 3211-03                                                                      |
| NA Certification     | UL Listed, CSA certified                                                     |
| Degree of Protection | UL/CSA Type 3R, 4X, 12, 13                                                   |


General


|                             |              |                   |                                                                                            |
|-----------------------------|--------------|-------------------|--------------------------------------------------------------------------------------------|
| Standards                   |              |                   | IEC/EN 60947<br>VDE 0660                                                                   |
| Lifespan, mechanical        | Operations   | x 10 <sup>6</sup> | > 0.1                                                                                      |
| Operating frequency         | Operations/h |                   |  2000 |
| Operating torque            |              | Nm                |  0.3  |
| Protection type             |              |                   | IP66                                                                                       |
| Climatic proofing           |              |                   | Damp heat, constant to IEC 60068-2-78<br>Damp heat, cyclic to IEC 60068-2-30               |
| Ambient temperature         |              | °C                |                                                                                            |
| Open                        |              | °C                | - 25 - + 70                                                                                |
| Mounting position           |              |                   | As required                                                                                |
| Mechanical shock resistance |              | g                 | 30<br>Shock duration 11 ms<br>Sinusoidal<br>according to IEC 60068-2-27                    |

Technische Daten nach ETIM 4.0

|                                |  |    |                    |
|--------------------------------|--|----|--------------------|
| Color bezel                    |  |    | Chrome             |
| Suitable for illumination      |  |    | YES                |
| Lens design                    |  |    | Round              |
| Protection type (IP), at front |  |    | IP66               |
| Material front ring            |  |    | Insulated material |
| Momentary                      |  |    | YES                |
| Number of switch positions     |  |    | 3                  |
| Color actuator                 |  |    | green              |
| Hole diameter                  |  | mm | 22                 |
| With bezel                     |  |    | YES                |
| Width of opening               |  | mm | 22                 |
| Height meter opening           |  | mm | 6                  |

|                             |                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------|
| <b>CAD-Daten</b>            |                                                                                             |
| Product standards CAD data: | <a href="http://eaton-moeller.partcommunity.com">http://eaton-moeller.partcommunity.com</a> |

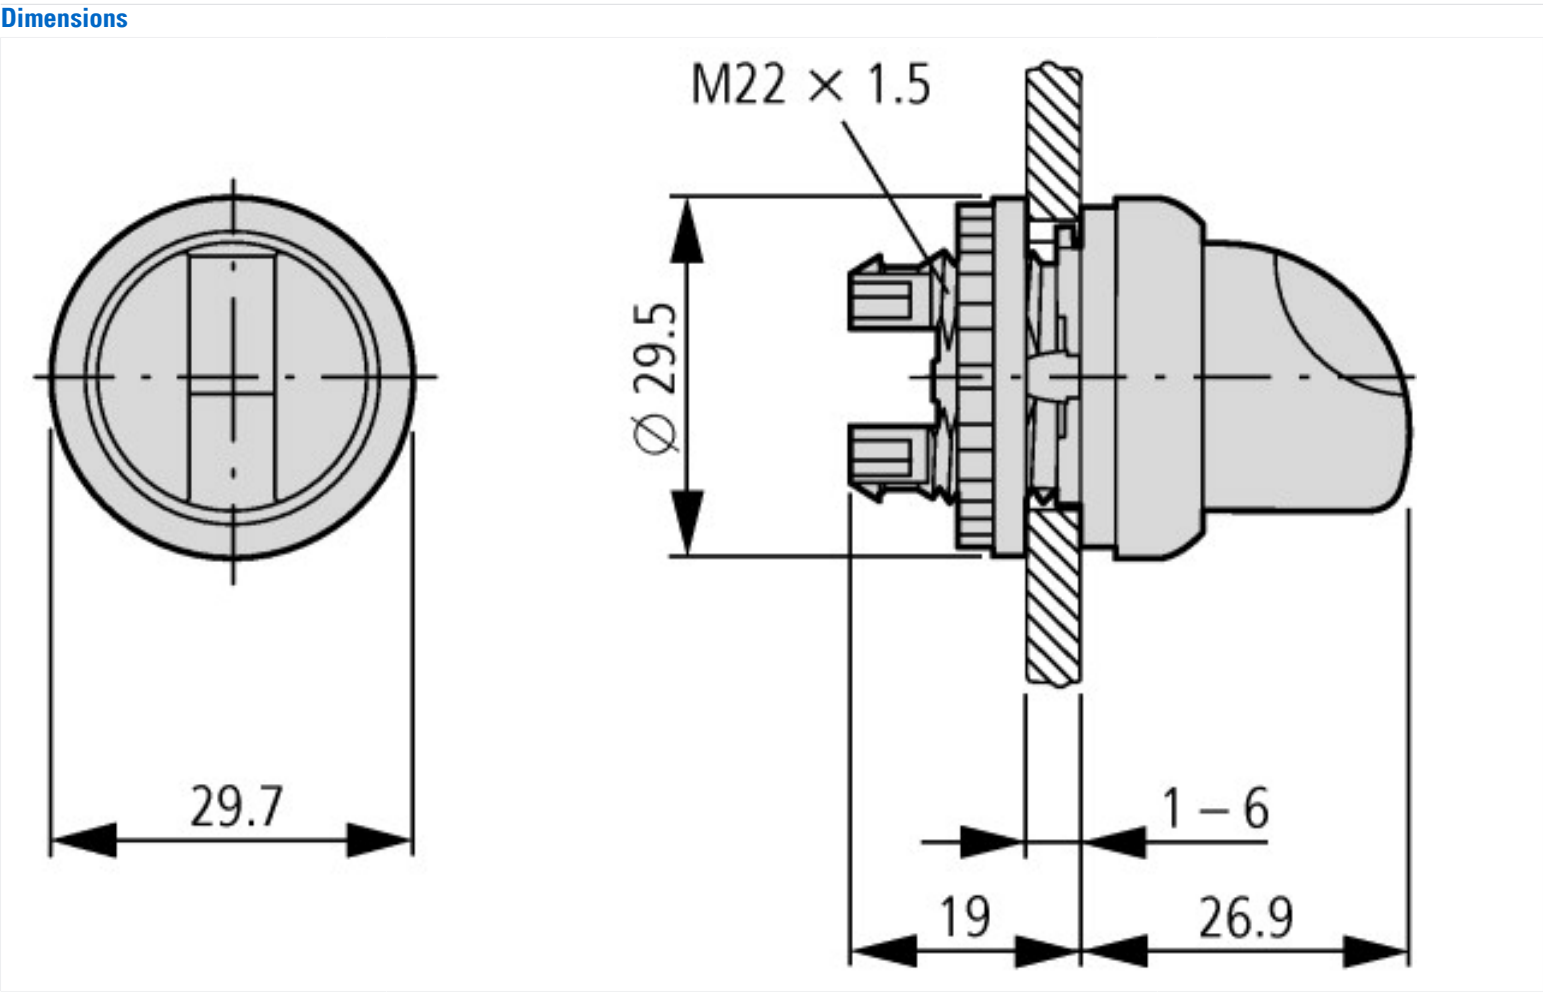

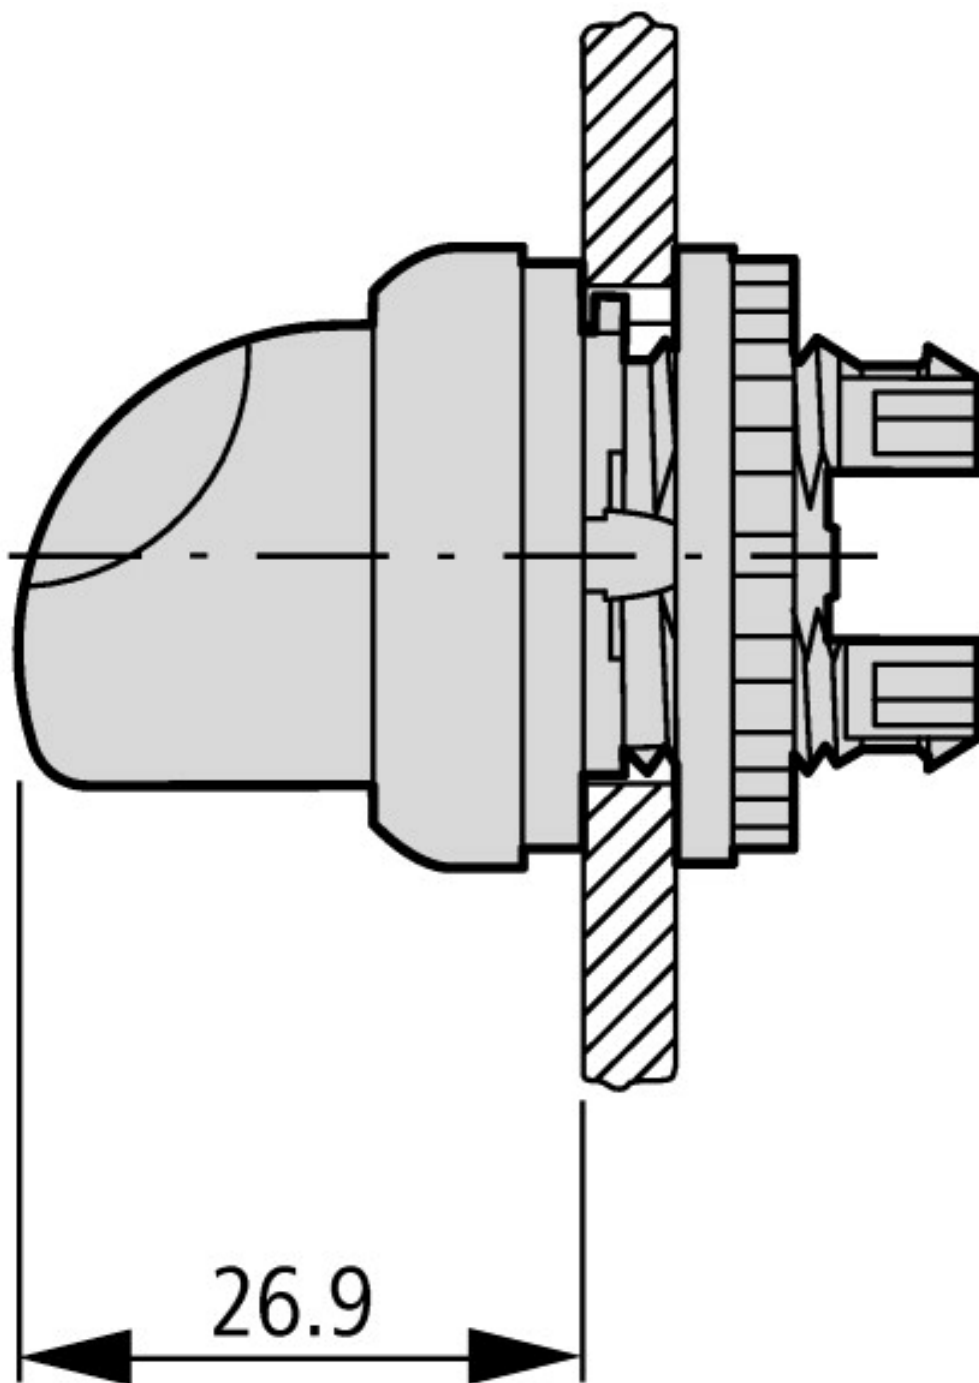

**Additional product information (links)**

|                                                 |                                                                                                                                                   |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| AWA1160-1745 (IL04716002Z) The RMQ-Titan system | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17450510.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17450510.pdf</a> |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|