


Plug-in card block - SKBI 32/C - 2261038

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



19" plug-in card block, nominal current: 1 A, number of positions: 32, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, color: green

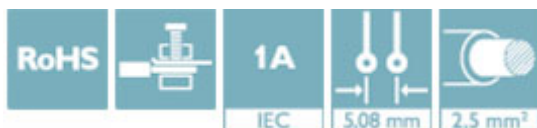

Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 053819
GTIN	4017918053819

Technical data

Dimensions

Length	43 mm
Height	138 mm
Width	112 mm
Pitch	5.08 mm
Hole diameter	4.2 mm

General

Range of articles	SKBI 32
Connection in acc. with standard	EN-VDE
Nominal current I_N	1 A
Nominal voltage U_N	250 V
Nominal cross section	2.5 mm ²
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	32

Connection data

Plug-in card block - SKBI 32/C - 2261038

Technical data

Connection data

Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12


Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

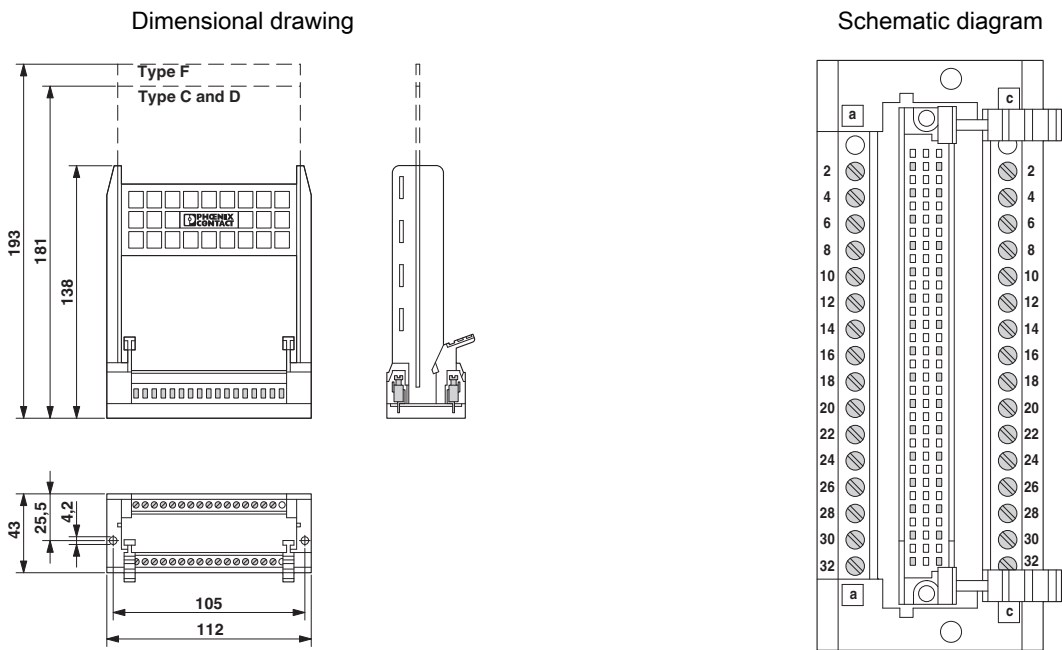

Approvals

Approvals

Approvals

EAC

Plug-in card block - SKBI 32/C - 2261038

Approvals

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>