


Specifications

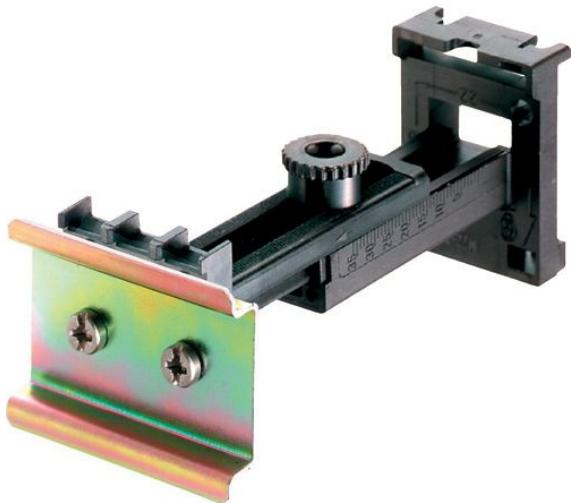

Eaton 226161

Eaton Moeller® series M22 Telescopic adapters

General specifications

PRODUCT NAME	Eaton Moeller® series M22 Accessory Telescopic clip
CATALOG NUMBER	226161
MODEL CODE	M22-TA
EAN	4015082261610
PRODUCT LENGTH/DEPTH	80 mm
PRODUCT HEIGHT	40 mm
PRODUCT WIDTH	45 mm
PRODUCT WEIGHT	0.043 kg
COMPLIANCES	CE Marked
CERTIFICATIONS	CSA Std. C22.2 No. 94-91 EN 60947-5 CSA Std. C22.2 No. 14-05 IEC 60947-5 UL 508 VDE UL CE CSA Class No.: 3211-03 UL Category Control No.: NKCR CSA-C22.2 No. 14-05 CSA File No.: 012528 CSA-C22.2 No. 94-91 IEC/EN 60947-5 CSA UL File No.: E29184
GLOBAL CATALOG	226161

Product specifications

USED WITH	PKE EC4P easy200/500/700/800 PKZM0 MFD-CP8
ACCESSORY/SPARE PART TYPE	Accessory
10.10 TEMPERATURE RISE	Not applicable.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.
10.2.2 CORROSION RESISTANCE	Meets the product standard's requirements.
10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES	Meets the product standard's requirements.
10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT	Meets the product standard's requirements.
10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS	Meets the product standard's requirements.
10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION	Please enquire
10.2.5 LIFTING	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 MECHANICAL IMPACT	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 INSCRIPTIONS	Meets the product standard's requirements.
10.3 DEGREE OF	Does not apply, since the

Resources

CATALOGS	eaton-rmq-titan-brochure-br047004en-en-us.pdf eaton-pushbuttons-signal-towers-sensors-assortment-overview-catalog-ca047003en-en-us.pdf Flip catalog - Product Range Catalog - Command and indication
DRAWINGS	eaton-operating-m22-telescopic-clip-dimensions.eps eaton-operating-indication-m22-indicator-light-dimensions-002.eps eaton-operating-m22-indicator-light-dimensions.eps eaton-operating-m22-telescopic-clip-3d-drawing.eps
ECAD MODEL	ETN.226161.edz
FLYERS	eaton-rmq-titan-selection-aid-brochure-fl047002-en-us.pdf
INSTALLATION INSTRUCTIONS	IL04716002Z
INSTALLATION VIDEOS	RMQ Flat Design
MCAD MODEL	teleskop_adapter teleskop_adapter.stp
MULTIMEDIA	MCI MultiColor Light Indicator RMQ compact solution RMQ small E-Stop emergency-stop button easyE4 SmartWire-DT module with Remote Touch Display and RMQ multi color indicator MCI Multicolor Light Indicator M22 with SmartWire-DT
SALES NOTES	eaton-rmq-flat-enclosure-flyer-fl047003en-en-us.pdf

PROTECTION OF ASSEMBLIES	entire switchgear needs to be evaluated.
10.4 CLEARANCES AND CREEPAGE DISTANCES	Meets the product standard's requirements.
10.5 PROTECTION AGAINST ELECTRIC SHOCK	Does not apply, since the entire switchgear needs to be evaluated.
10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
FITTED WITH:	35 mm top-hat rail (according to IEC/EN 60715)
CONNECTION TO SMARTWIRE-DT	No
FUNCTIONS	For equalization of the mounting depth of rear mounting devices in CI enclosures, and in cabinets with mounting depths of 115 - 155 mm For mounting of EASY, FAZ, PKZ, DIL etc. weighing ≤ 0.3 kg
ELECTRICAL ACCESSORY TYPE	Other
MECHANICAL ACCESSORY TYPE	Other
AMBIENT OPERATING TEMPERATURE - MAX	70 °C
AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID	0 W
HEAT DISSIPATION CAPACITY PDISS	0 W

[eaton-rmq-small-e-stop-flyer-fl047006en-en-us.pdf](#)

[eaton-rmq-mci-multi-color-light-indicator-flyer-fl047005en-en-us.pdf](#)

[eaton-control circuit-devices rmq-titan-fl144090en-en-us.pdf](#)

HEAT DISSIPATION PER

POLE, CURRENT-DEPENDENT PVID 0 W

RATED OPERATIONAL

CURRENT FOR SPECIFIED 0 A
HEAT DISSIPATION (IN)

STATIC HEAT

DISSIPATION, NON-CURRENT-DEPENDENT 0 W
PVS

PRODUCT CATEGORY

- Accessories
- Compact PLCs
- Control relay easyRelay

PROJECT NAME:**PROJECT NUMBER:****PREPARED BY:****DATE:****Eaton Corporation plc**

Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

