

SIM-EI- 24DC/TTL/100 - Miniature solid-state relay



2271154

<https://www.phoenixcontact.com/pc/products/2271154>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Input solid-state relay, with protective circuit in input and output circuits, input: 24 V DC, output: TTL logic level, max. 100 mA

Commercial data

Item number	2271154
Packing unit	10 pc
Minimum order quantity	1 pc
Product key	CK61F1
Catalog page	Page 557 (C-7-2013)
GTIN	4017918054199
Weight per piece (including packing)	19.67 g
Weight per piece (excluding packing)	19.67 g
Customs tariff number	85364190
Country of origin	DE

SIM-EI- 24DC/TTL/100 - Miniature solid-state relay



2271154

<https://www.phoenixcontact.com/pc/products/2271154>

Technical data

Product properties

Product type	Single solid-state relay
--------------	--------------------------

Electrical properties

Test voltage (Input/output)	2.5 kV (50 Hz, 1 min., input/output)
-----------------------------	--------------------------------------

Input data

Nominal input voltage U_N	24 V AC
Input voltage range in reference to U_N	0.9 ... 1.1
Input voltage range	21.6 V DC ... 26.4 V DC
Switching threshold "0" signal in reference to U_N	≤ 0.4
Switching threshold "1" signal in reference to U_N	≥ 0.8
Typical input current at U_N	5.1 mA
Protective circuit	Reverse polarity protection; Polarity protection diode
Transmission frequency	4000 Hz

Output data

Design of digital output	electronic
Output voltage range	3 V DC ... 5.25 V DC
Limiting continuous current	100 mA
Fan out	1
Voltage drop at max. limiting continuous current	0.3 V
Output circuit	3-conductor, ground-referenced
Protective circuit	Reverse polarity protection; Polarity protection diode Free running; Freewheeling diode
Output resistor	approx. 390 Ω

Dimensions

Dimensional drawing	
Width	13 mm
Height	29 mm
Depth	25 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

SIM-EI- 24DC/TTL/100 - Miniature solid-state relay



2271154

<https://www.phoenixcontact.com/pc/products/2271154>

Standards and regulations

Standards/regulations	DIN VDE 0110
-----------------------	--------------

Mounting

Assembly note	Can be aligned with 2 mm spacing
Mounting position	any

SIM-EI- 24DC/TTL/100 - Miniature solid-state relay




2271154


<https://www.phoenixcontact.com/pc/products/2271154>

Drawings

Dimensional drawing

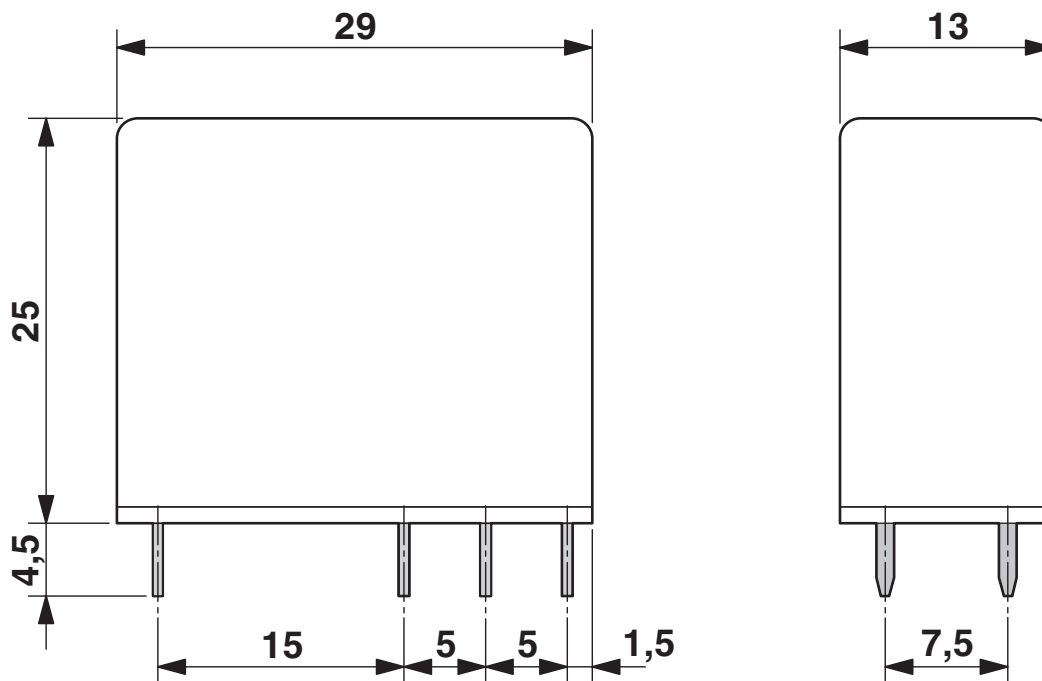


Circuit diagram

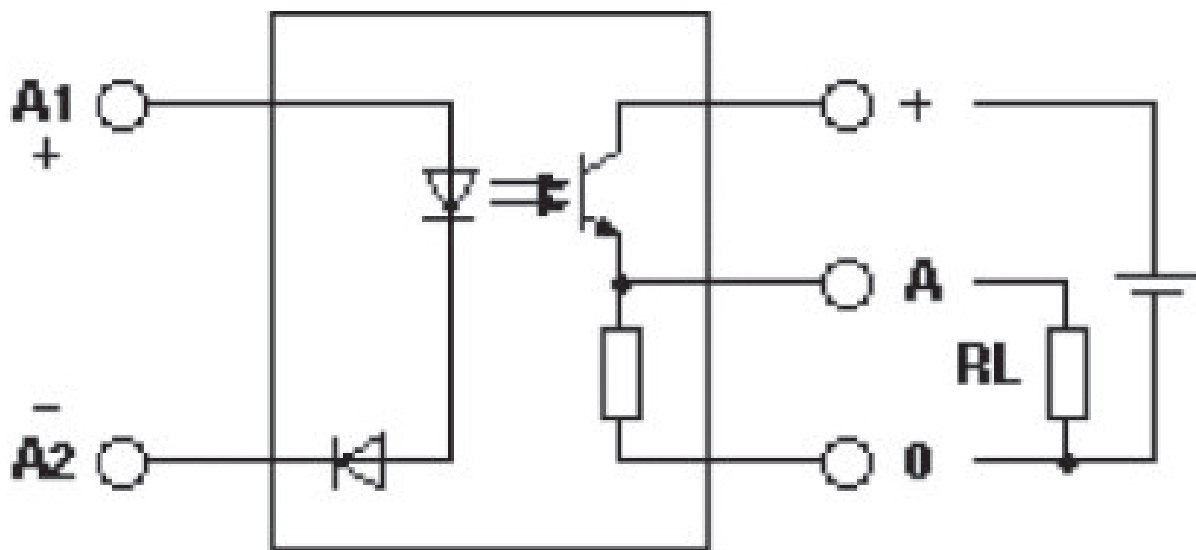

Schematic diagram



Circuit diagram

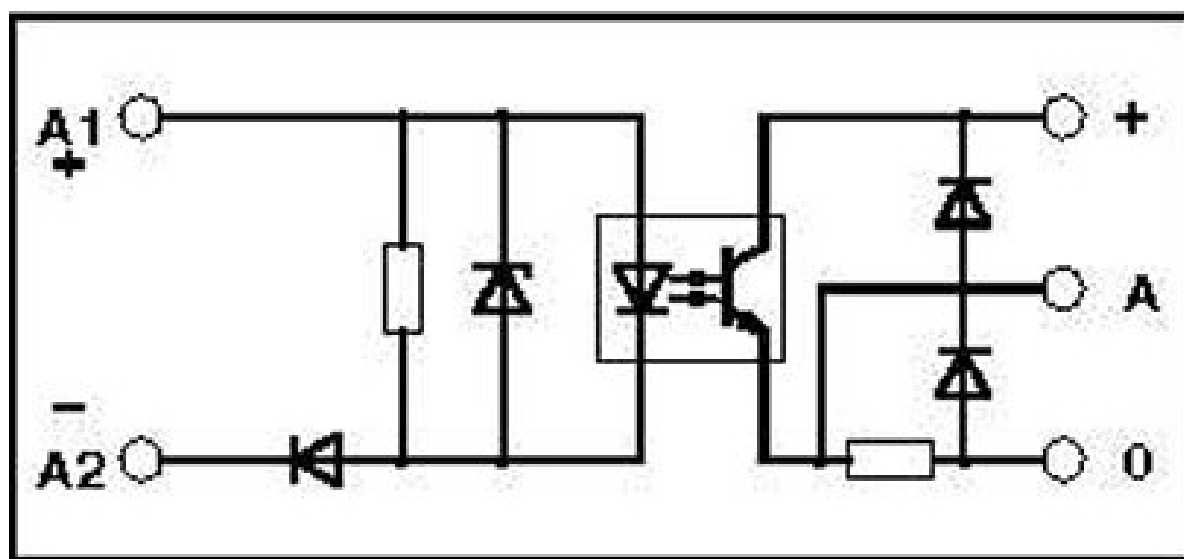

SIM-EI- 24DC/TTL/100 - Miniature solid-state relay



2271154

<https://www.phoenixcontact.com/pc/products/2271154>

Classifications

ECLASS

ECLASS-11.0	27371604
-------------	----------

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-50 An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com