

Acoustic indicator IP40

Part no.

M22-AMC

Article no.

229015



Front black, without buzzer, BA 9s lamp socket

Delivery programme

Range			RMQ-Titan (drilling dimensions 22.5 mm)
Basic function			Acoustic device
Single unit/Complete unit			Single unit
Description			without buzzer with BA 9s lamp socket
Front			
			Black
Protection type			IP40
Connection to SmartWire-DT			no

Approbationen

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification
Degree of Protection

IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
E29184
NKCR
012528
3211-03
UL Listed, CSA certified
UL/CSA Type 3R, 4X, 12, 13

General

Standards			IEC/EN 60947 VDE 0660
Protection type			IP40
Climatic proofing			Damp heat, constant to IEC 60068-2-78 Damp heat, cyclic to IEC 60068-2-30
Ambient temperature		°C	
Open		°C	- 25 - + 70
Mounting position			As required
Mechanical shock resistance		g	30 Shock duration 11 ms Sinusoidal according to IEC 60068-2-27
Terminal capacity			
Solid		mm ²	0.5 - 1.5
Stranded		mm ²	0.5 - 1.5

Contacts

Rated impulse withstand voltage	U _{imp}	V AC	4000
Rated insulation voltage	U _i	V	250
Overvoltage category/pollution degree			III/3

Technische Daten nach ETIM 4.0



Operational voltage at DC			0
Type of acoustic signal			-
Voltage type			AC/DC
Operating voltage at AC 60 Hz		V	0
Operating voltage at AC 50 Hz		V	0


CAD-Daten

Product standards CAD data:

<http://eaton-moeller.partcommunity.com>

Dimensions

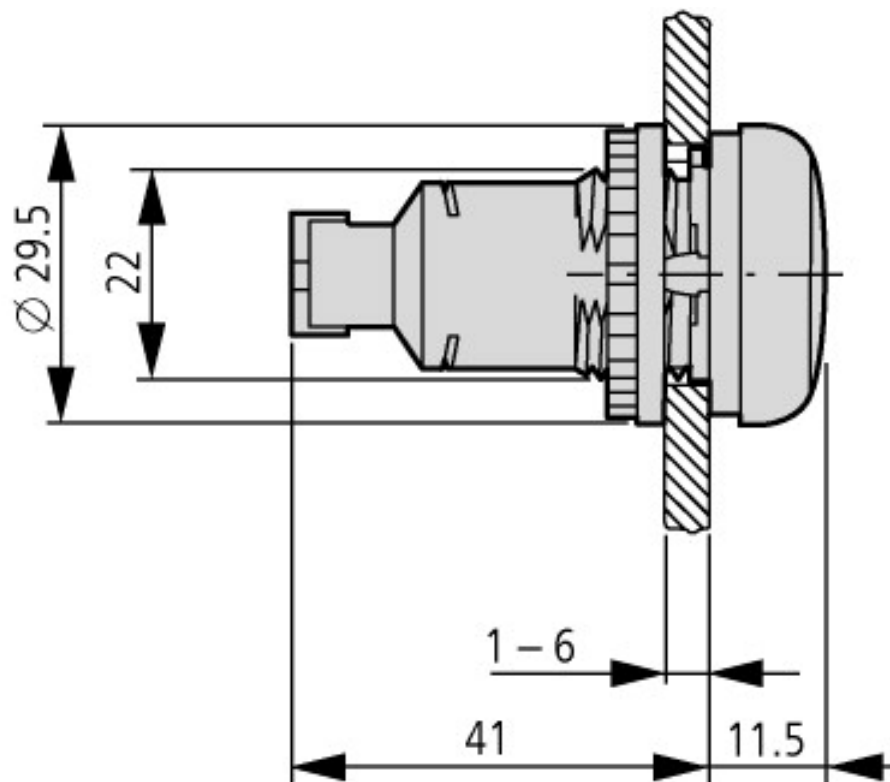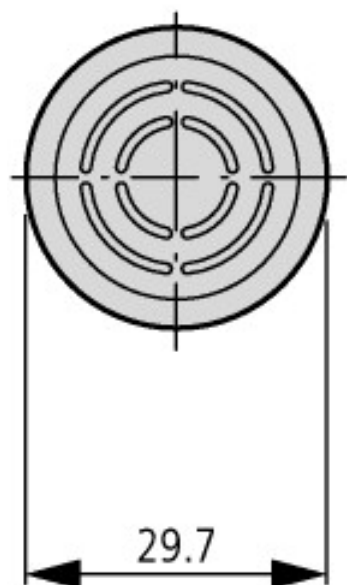

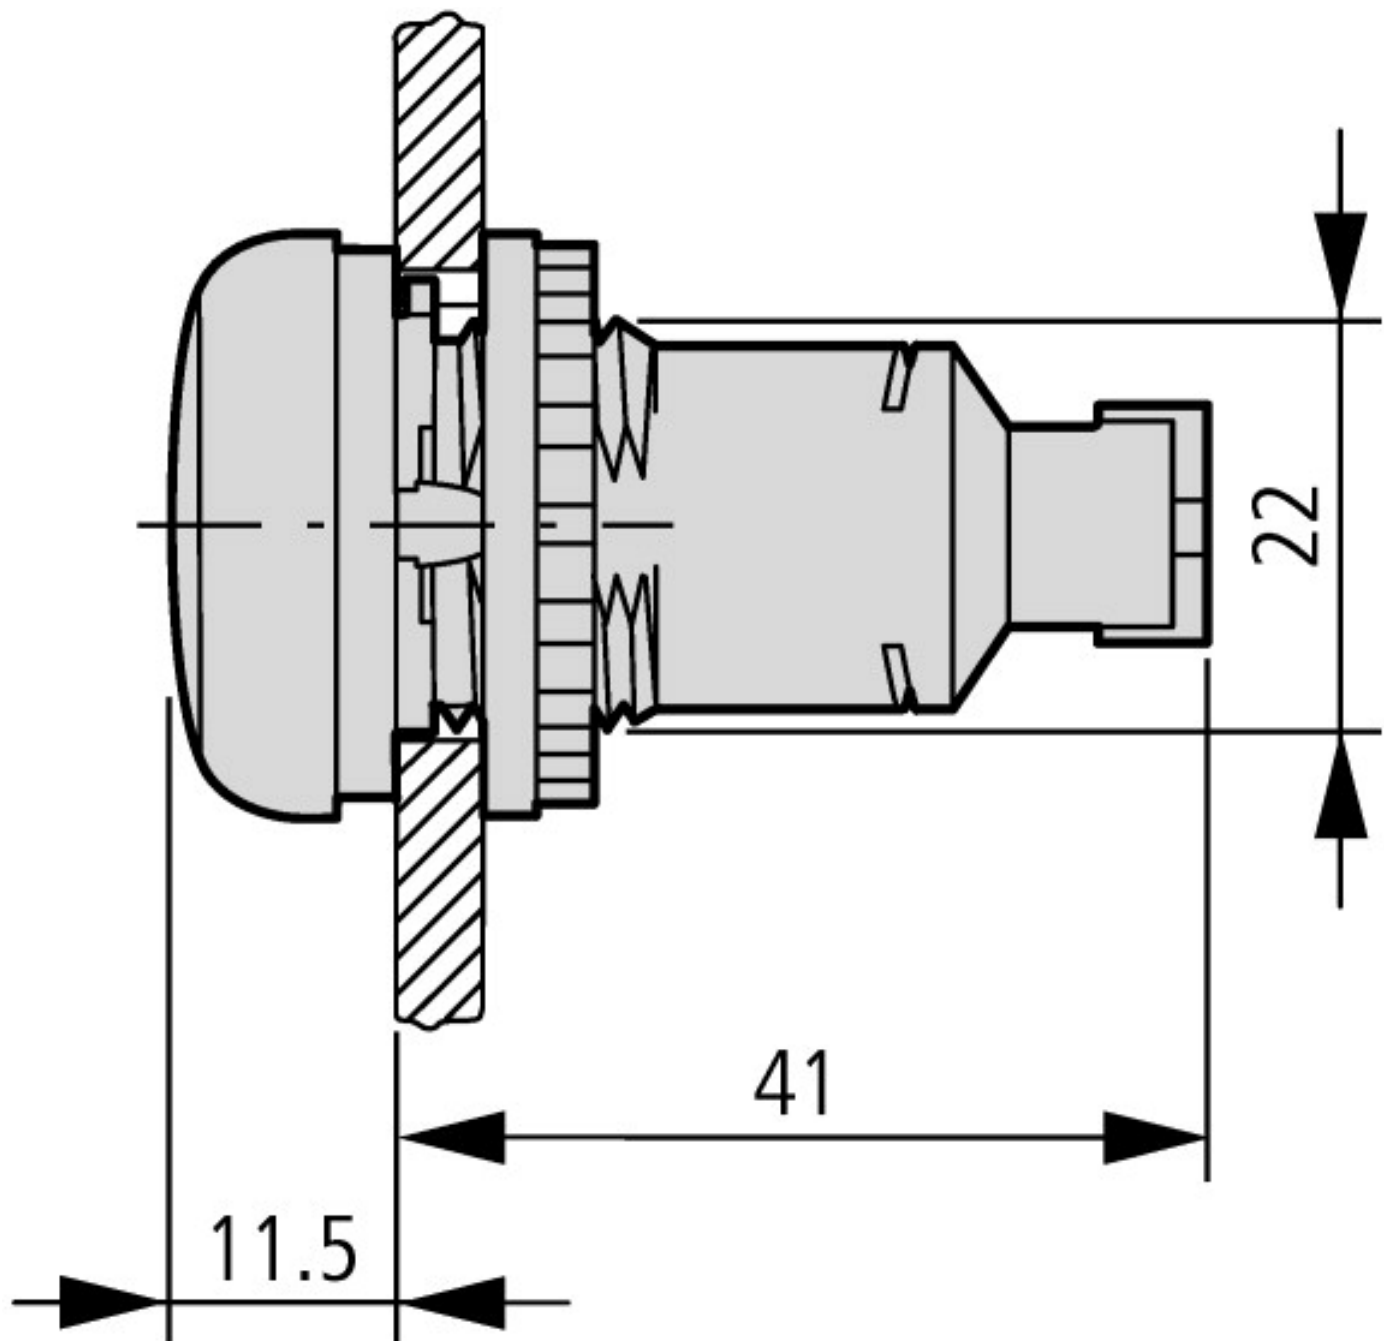

Additional product information (links)

AWA1160-1745 (IL04716002Z) The RMQ-Titan system

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17450510.pdf