

FLKM 50-PA-S400 - Front adapter



2294500

<https://www.phoenixcontact.com/it/products/2294500>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE front adapter, for Siemens SIMATIC® S7-400, 1x 32 channels can be connected

Your advantages

- Transmission of a maximum of 32 digital channels via a 50-pos. system cable

Commercial data

Item number	2294500
Packing unit	2 pc
Minimum order quantity	1 pc
Sales key	CK2
Product key	CK2117
Catalog page	Page 508 (C-5-2019)
GTIN	4017918129750
Weight per piece (including packing)	198.855 g
Weight per piece (excluding packing)	198.47 g
Customs tariff number	85369010
Country of origin	DE

FLKM 50-PA-S400 - Front adapter



2294500

<https://www.phoenixcontact.com/it/products/2294500>

Technical data

Product properties

Product type	Front adapter
Product family	VARIOFACE

Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 60 V DC
Nominal operating mode	100% operating factor
Current (per branch)	≤ 1 A
Current (Voltage supply via IDC/FLK)	≤ 2 A
Current (Voltage supply via spade connection)	≤ 8 A

Air clearances and creepage distances

Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (1.2/50 μ s)

Supported controller SIEMENS S7-400

Suitable I/O card	6ES7421-1BL01-0AA0
	6ES7422-1BL00-0AA0
	6ES7422-7BL00-0AB0

Supported controller SIEMENS S7-400

Note	Only in conjunction with VIP-2/SC/FLK50/S7/A-S400, Item No. 2322359 VIP-2/PT/FLK50/S7/A-S400, Item No. 2904289 all DR wire bridges on the adapter must be disconnected.
Suitable I/O card	6ES7421-7BH01-0AB0
	6ES7421-7DH00-0AA0

Connection data

Connection 1 (control level)

Connection method	Plug-in connection
Number of positions	48

Connection 2 (field level)

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK pin strip

FLKM 50-PA-S400 - Front adapter



2294500

<https://www.phoenixcontact.com/it/products/2294500>

Number of connections	1
Number of positions	50
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

Connection 3 (supply)

Connection method	Spade connection
Number of positions	5
Note	2,8 x 0,8

Dimensions

Item dimensions

Width	24.2 mm
Height	273.5 mm
Depth	67.6 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection (Module)	IP00
Degree of protection (Installation location)	≥ IP54
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

Standards and regulations

Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

Mounting

Mounting type	Plug-in mounting
Mounting position	any

Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
General	For I/O cards 6ES7 421-1BL01-0AA0, 6ES7 422-1BL00-0AA0, and 6ES7 422-7BL00-0AB0: Thanks to the wire bridges that are supplied as standard, the input and output bytes are non-isolated.

FLKM 50-PA-S400 - Front adapter



2294500

<https://www.phoenixcontact.com/it/products/2294500>

General	<p>For I/O cards 6ES7 421-7BH01-0AB0 and 6ES7 421-7DH00-0AB0:</p> <p>Only operate in conjunction with VIP-2/SC/FLK50/S7/A-S400 (Item No. 2322359) or VIP-2/PT/FLK50/S7/A-S400 (Item No. 2904289).</p> <p>All wire bridges on the adapter must be disconnected.</p>
---------	--


FLKM 50-PA-S400 - Front adapter

2294500

<https://www.phoenixcontact.com/it/products/2294500>



Drawings

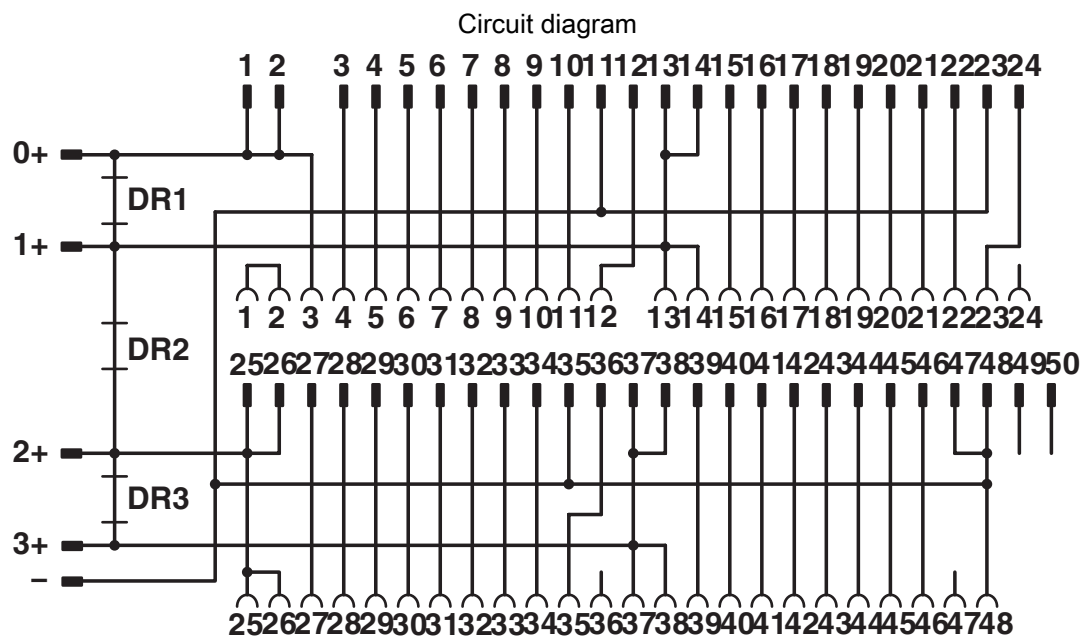

FLKM 50-PA-S400 - Front adapter





2294500

<https://www.phoenixcontact.com/it/products/2294500>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/2294500>

 cUL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	0.5 A	-	-

 UL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	0.5 A	-	-

cULus Recognized				
-------------------------	--	--	--	--

FLKM 50-PA-S400 - Front adapter



2294500

<https://www.phoenixcontact.com/it/products/2294500>

Classifications

ECLASS

ECLASS-11.0	27242292
ECLASS-12.0	27242292
ECLASS-13.0	27242292

ETIM

ETIM 9.0	EC002584
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

FLKM 50-PA-S400 - Front adapter

2294500

<https://www.phoenixcontact.com/lt/products/2294500>



Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com