

ELR W3-230AC/500AC- 2 - Solid-state reversing contactor

2297303
<https://www.phoenixcontact.com/au/products/2297303>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Three-phase solid-state reversing contactor with 230 V AC input, 2 A output current, zero voltage switch, optionally with thermal fuse

Your advantages

- Optional thermal fuse
- Stable and short switching times
- Long service life
- Noise and wear-free switching
- High switching frequency
- Integrated protection circuit
- Integrated locking and load wiring

Commercial data

Item number	2297303
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CK7221
Product key	CK7221
Catalog page	Page 40 (C-5-2019)
GTIN	4046356175661
Weight per piece (including packing)	445.4 g
Weight per piece (excluding packing)	435.2 g
Customs tariff number	85364900
Country of origin	DE

ELR W3-230AC/500AC- 2 - Solid-state reversing contactor



2297303

<https://www.phoenixcontact.com/au/products/2297303>

Technical data

Product properties

Product type	Solid-state contactor
Operating mode	100% operating factor

Electrical properties

Number of phases	3
Test voltage (Input/output)	5 kV _{rms} (50 Hz, 60 s)
Switching frequency	max. 1 Hz
Reversing frequency	≤ 2 Hz

Insulation characteristics

Rated insulation voltage	500 V
Rated surge voltage	6 kV
Overvoltage category	III
Degree of pollution	2
Insulation characteristics between the control input voltage to the main circuit	Basic insulation

Input data

Control

Input name	Control input right/left
Mains frequency	50 Hz
	60 Hz
Rated actuating voltage U_C	230 V AC
Triggering voltage range	92 V AC ... 253 V AC
Voltage range with reference to U_C	0.4 ... 1.1
	0.4 ... 1.1
Rated actuating current I_C	11.2 mA
Switching threshold	48 V AC ("0" signal)
	96 V AC ("1" signal)
Protective circuit	Surge protection; Varistor
Error indication	Red LED
Status display	Yellow LED

Output data

AC output

Rated operating voltage U_e	500 V AC
Operating voltage range	48 V AC ... 575 V AC
Rated operating current at AC-51	2 A
Rated operating current at AC-53a	2 A
Peak offstate voltage	1200 V

ELR W3-230AC/500AC- 2 - Solid-state reversing contactor



2297303

<https://www.phoenixcontact.com/au/products/2297303>

Mains frequency	40 Hz ... 100 Hz
Load current range	100 mA ... 2 A (see to derating)
Leakage current	6 mA
Residual voltage	< 1.5 V
Surge current	200 A (t = 10 ms)
Max. load value	250 A ² s
Protective circuit	RCV circuit
Surge voltage protection	> 575 V AC

Connection data

Control circuits

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm 5 lb _F -in. ... 7 lb _F -in.

Load circuit

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm 5 lb _F -in. ... 7 lb _F -in.

Signaling

Status display	Yellow LED
Error indication	Red LED

Dimensions

Width	40 mm
Height	99 mm
Depth	114.5 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

ELR W3-230AC/500AC- 2 - Solid-state reversing contactor



2297303
<https://www.phoenixcontact.com/au/products/2297303>

Approvals

UL approval	
Certificate	NMFT.E323771
UL data	
SCCR	5 kA (20 A RK5 (standard fault) fuse)

Standards and regulations

Standards/regulations	
Standards/regulations	DIN EN 50178
	EN 60947

Mounting

Mounting type	DIN rail mounting
Assembly instructions	Can be aligned with spacing = 20 mm
Mounting position	Vertical (horizontal DIN rail)



ELR W3-230AC/500AC- 2 - Solid-state reversing contactor



2297303

<https://www.phoenixcontact.com/au/products/2297303>

Drawings

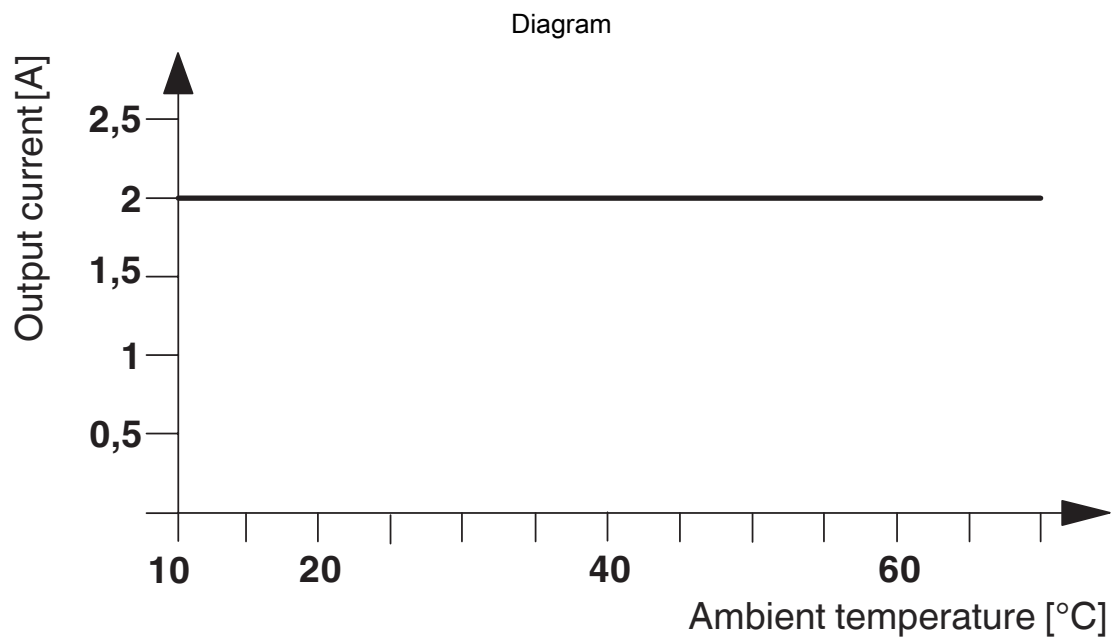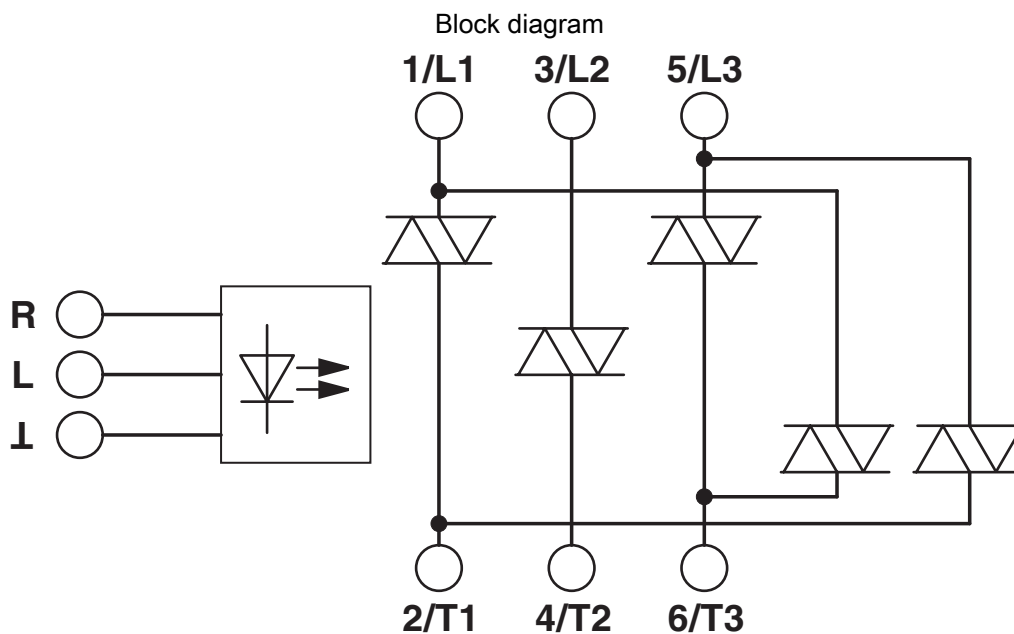

ELR W3-230AC/500AC- 2 - Solid-state reversing contactor



2297303
<https://www.phoenixcontact.com/au/products/2297303>

Classifications

ECLASS

ECLASS-11.0	27371014
-------------	----------

UNSPSC

UNSPSC 21.0	39122333
-------------	----------

ELR W3-230AC/500AC- 2 - Solid-state reversing contactor



2297303
<https://www.phoenixcontact.com/au/products/2297303>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au