

EMM 3- 24DC/500AC-16-IFS - Motor management



2297523

<https://www.phoenixcontact.com/pc/products/2297523>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Electronic motor management with integrated current transformers up to 16 A - active power measurement for overload and underload monitoring of motors and systems for optimum protection. Freely parameterizable switching and signaling thresholds.

Your advantages

- Optional connection to INTERFACE system and PROFIBUS-GATEWAY-IFS via TBUS
- Digital outputs control external switching elements
- Freely parameterizable signaling or switching thresholds

Commercial data

Item number	2297523
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CK7511
Catalog page	Page 16 (C-5-2019)
GTIN	4046356175777
Weight per piece (including packing)	262.4 g
Weight per piece (excluding packing)	225.2 g
Customs tariff number	85371098
Country of origin	DE

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Electronic motor manager
Product family	CONTACTRON
Operating mode	100% operating factor

Electrical properties

Number of phases	3
Maximum power dissipation for nominal condition	5.5 W
Test voltage input/output	8 kV

Supply

Rated control circuit supply voltage U_S	24 V DC
Control supply voltage range	19.2 V DC ... 30 V DC
Rated control supply current I_S	25 mA
Switching threshold	9.6 V DC ("0" signal) 19.2 V DC ("1" signal)

Insulation characteristics

Rated insulation voltage	500 V
Rated surge voltage	6 kV
Overvoltage category	III
Degree of pollution	2
Insulation characteristics between the input and output circuits	Safe isolation (IEC 60947-1)
Insulation characteristics between the thermistor input and output	Basic insulation (IEC 60947-1)

Input data

Digital inputs (IN1 - IN4)

Number of inputs	4 (IN1 - IN4)
Rated actuating voltage U_C	24 V DC
Rated actuating current I_C	3.3 mA

Voltage measuring input V1, V2, V3

Input voltage range	42 V AC ... 575 V AC
Typical input current at U_N	< 0.5 mA

Current measuring input L1/T1, L2/T2, L3/T3

Typical input current at U_N	≤ 16 A
--------------------------------	--------

Power measurement

Basic accuracy	typ. 2 %
Power range	14 kW

Voltage measurement/star voltage

Basic accuracy	typ. 0.75 %
Voltage range	0 V AC ... 350 V AC (Phase-to-neutral voltage)

Current measurement

Basic accuracy	typ. 0.5 %
Current range	400 mA ... 16 A
Measuring via	Internal current transformer

Output data

Output name	Acknowledging contacts O1-O4
Note	The meaning of the acknowledgement outputs can be freely parameterized, see user manual
Number of outputs	4
Nominal output voltage	24 V DC (semiconductor output)
Output voltage range	19.2 V DC ... 30 V DC
Continuous load current	500 mA
Residual voltage	< 200 mV
Protective circuit	Suppressor diode
Surge voltage protection	> 33 V DC

Connection data

Control circuits

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

Load circuit

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

Signaling

Status display	Yellow LED
Operating voltage display	Green LED

Error indication	Red LED
Data communication display	green LED

Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Color	gray (RAL 7042)
-------	-----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

Approvals

ATEX

Identification	⊕ II (2) G [Ex e] [Ex d] [Ex px]
	⊕ II (2) D [Ex t] [Ex p]
Certificate	PTB 10 ATEX 3024

UL, USA/Canada

Certificate	NKCR.E140324
-------------	--------------

Safety Integrity Level (SIL, IEC 61508)

Identification	≤ 1
Note	Safe shutdown

Safety Integrity Level (SIL, IEC 61508)

Identification	1
Note	Motor protection

Category (ISO 13849)

Identification	≤ 1
Note	Safe shutdown

Performance Level

Identification	≤ b
Note	Safe shutdown

Standards and regulations

Standards/regulations

DIN EN 50178

EMM 3- 24DC/500AC-16-IFS - Motor management



2297523

<https://www.phoenixcontact.com/pc/products/2297523>


Standards/regulations	EN 60947
	EN 60947-4-2

Mounting


Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	Vertical (horizontal DIN rail)

Drawings


Block diagram

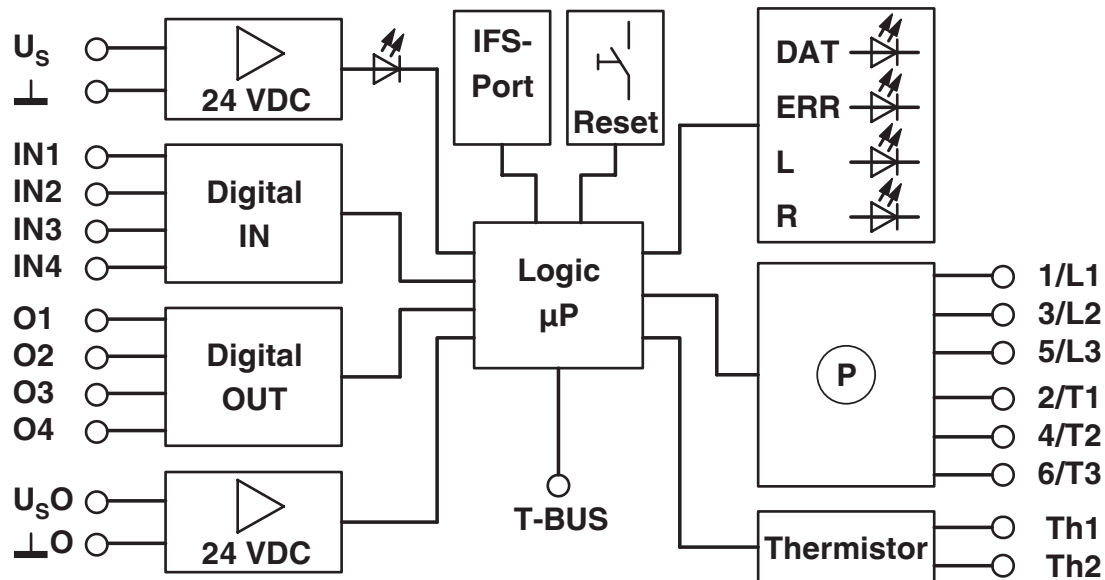


Connection diagram

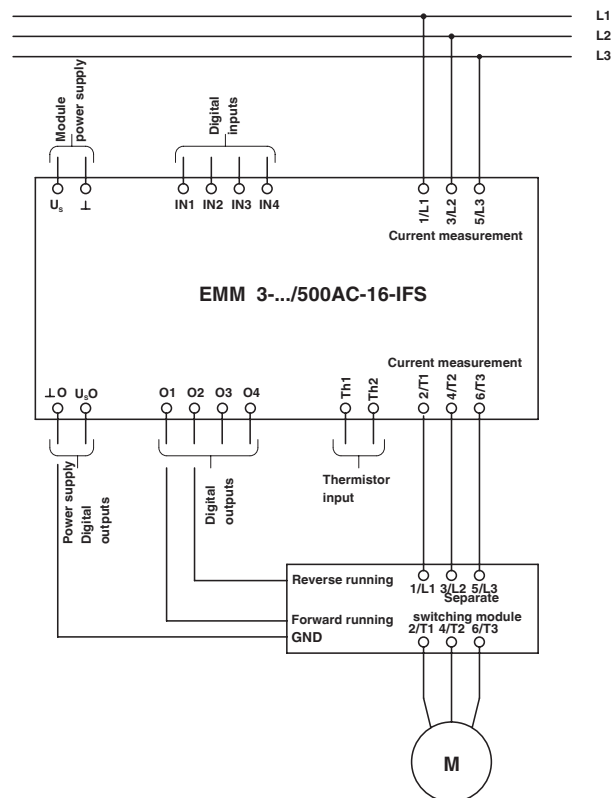

Diagram

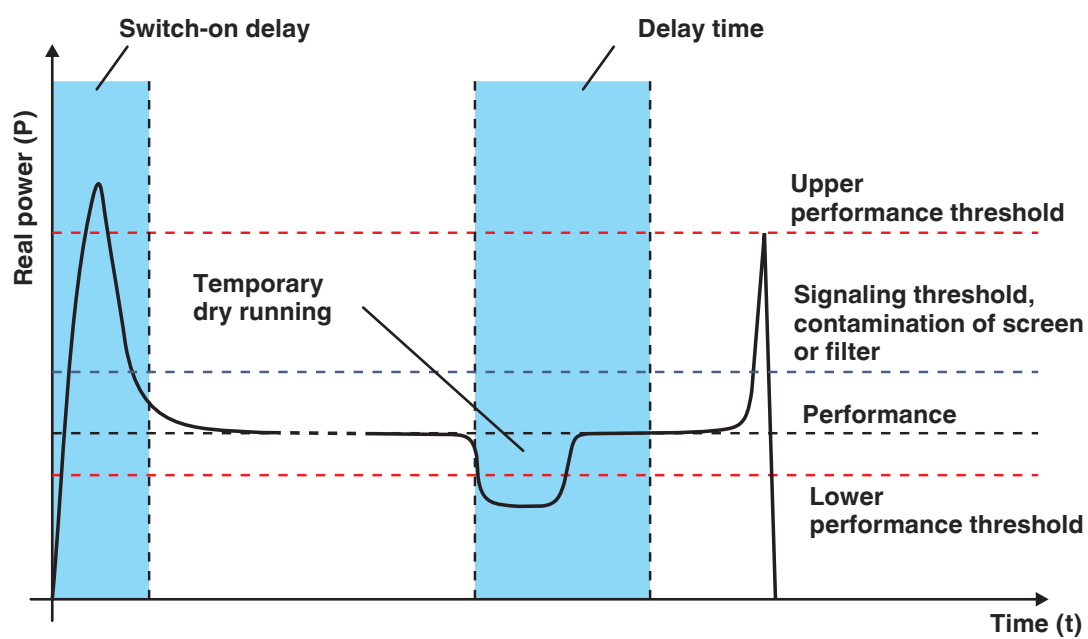


Status monitoring: air bubbles in motor-operated pumps

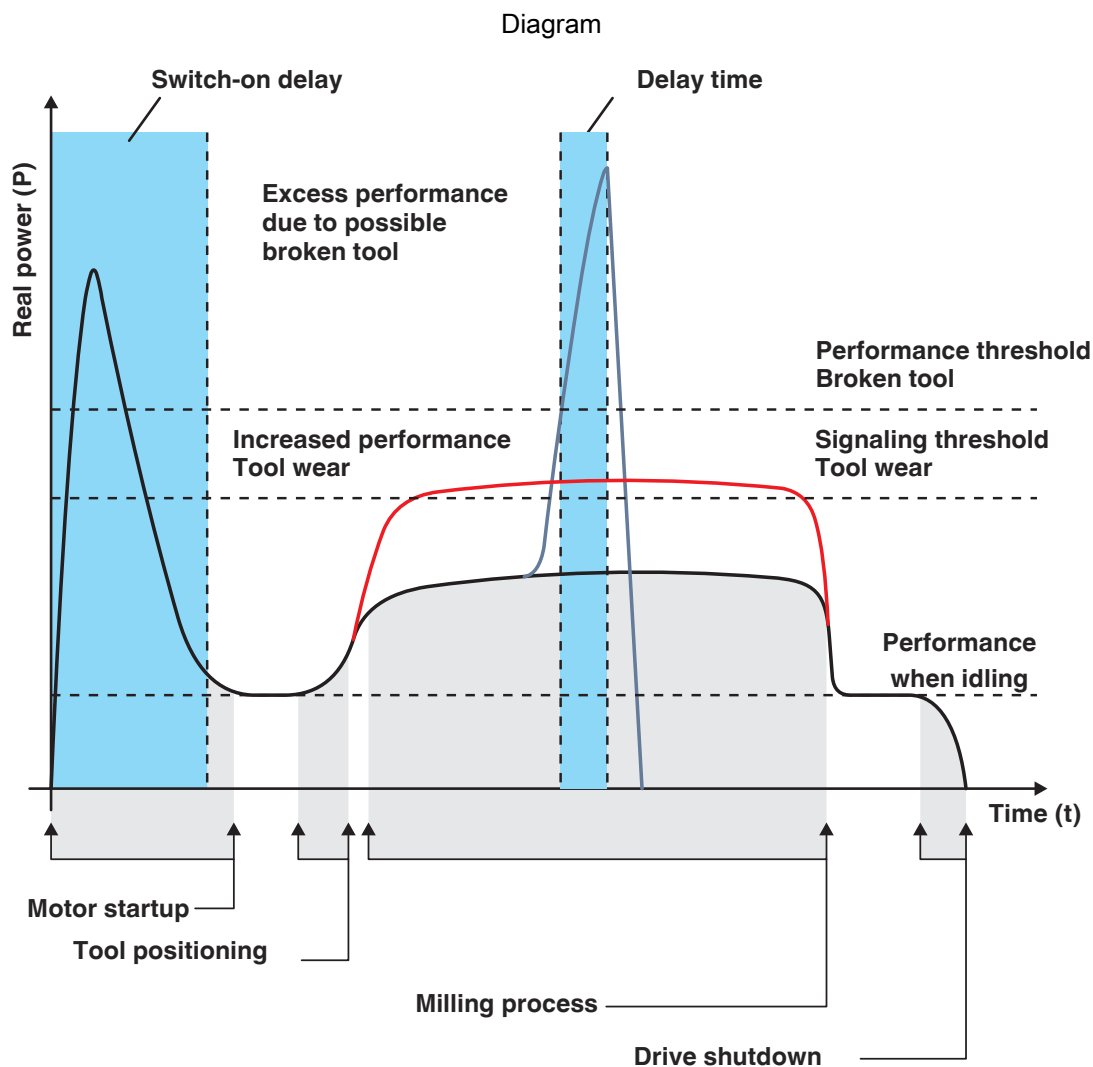

Status monitoring: machine tool for milling

Diagram

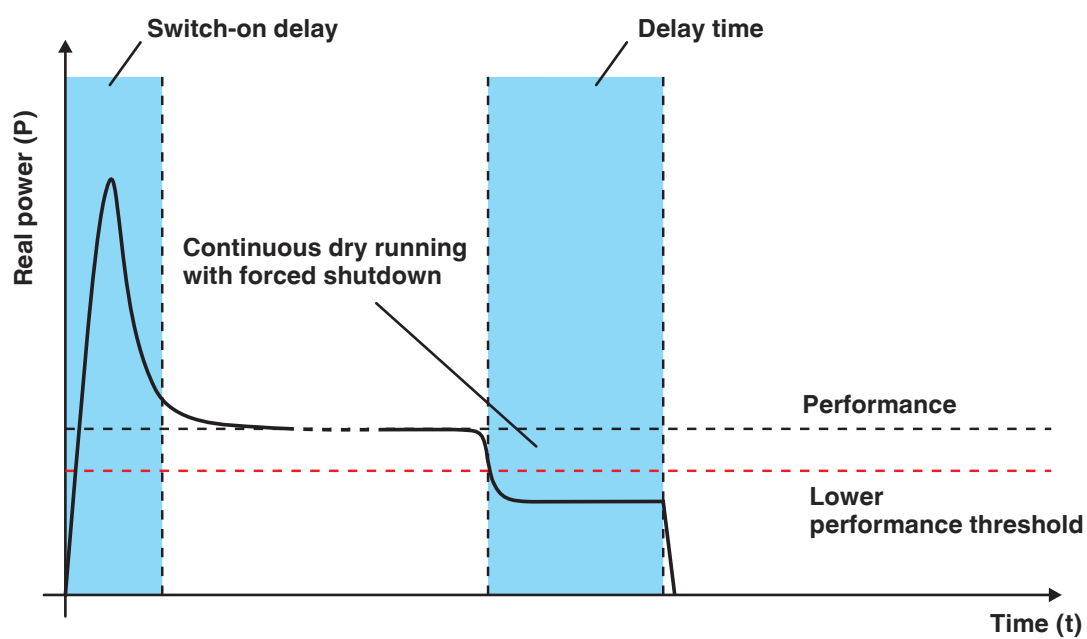

Status monitoring: dry run in motor-operated pumps

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2297523>



EAC
Approval ID: RU*C-DE.*08.B.00520*



UL Listed
Approval ID: FILE E 140324



cUL Listed
Approval ID: FILE E 140324



ATEX
Approval ID: PTB 10 ATEX 3024

cULus Listed

2297523

<https://www.phoenixcontact.com/pc/products/2297523>

Classifications

ECLASS

ECLASS-11.0	27370804
ECLASS-13.0	27370804
ECLASS-12.0	27370804

ETIM

ETIM 9.0	EC002572
----------	----------

UNSPSC

UNSPSC 21.0	39121100
-------------	----------

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com