


Specifications



Photo is representative

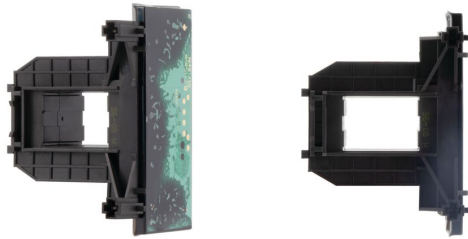

Eaton 230081

Eaton Moeller® series DILM Replacement coil, Tool-less plug connection, RDC 60: 48 - 60 V DC, DC, For use with: DILM80, DILM95

General specifications

PRODUCT NAME	Eaton Moeller® series DILM replacement coil
CATALOG NUMBER	230081
MODEL CODE	DILM95-XSP(RDC60)
EAN	4015082300814
PRODUCT LENGTH/DEPTH	51 mm
PRODUCT HEIGHT	110 mm
PRODUCT WIDTH	63.2 mm
PRODUCT WEIGHT	0.256 kg
COMPLIANCES	CE Marked
CERTIFICATIONS	IEC 60947-4-1 EN 60947-4-1 CSA Std. C22.2 No. 14-05 UL 508 CSA Class No.: 2411-03, 3211-04 UL File No.: E29096 CSA CSA-C22.2 No. 14-05 CSA File No.: 012528 UL CE UL Category Control No.: NLDX IEC/EN 60947-4-1
GLOBAL CATALOG	230081

Product specifications

ACCESSORIES

Individual coils

10.11 SHORT-CIRCUIT RATING

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 ELECTROMAGNETIC COMPATIBILITY

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 MECHANICAL FUNCTION

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

10.2.2 CORROSION RESISTANCE

Meets the product standard's requirements.

10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES

Meets the product standard's requirements.

10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT

Meets the product standard's requirements.

10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS

Meets the product standard's requirements.

10.2.5 LIFTING

Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 MECHANICAL IMPACT

Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 INSCRIPTIONS

Meets the product standard's requirements.

10.3 DEGREE OF PROTECTION OF ASSEMBLIES

Does not apply, since the entire switchgear needs to be evaluated.

10.4 CLEARANCES AND CREEPAGE DISTANCES

Meets the product standard's requirements.

10.5 PROTECTION AGAINST ELECTRIC SHOCK

Does not apply, since the entire switchgear needs to be evaluated.

10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS

Does not apply, since the entire switchgear needs to be evaluated.

Resources

[SmartWire-DT Catalog](#)

CATALOGS

[eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf](#)

[Product Range Catalog Switching and protecting motors](#)

DRAWINGS

[eaton-contactors-dilm-replacement-coil-3d-drawing.eps](#)

[xEffect - Industrial Switchgear Range](#)

ECAD MODEL

[ETN.230081.edz](#)

INSTALLATION INSTRUCTIONS

[IL03407042Z](#)

INSTALLATION VIDEOS

[WIN-WIN with push-in technology](#)

10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
FREQUENCY RATING	50 to 60 Hz
VOLTAGE TYPE	DC
AMBIENT OPERATING TEMPERATURE - MAX	60 °C
AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MAX	0 V
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MIN	0 V
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MAX	0 V
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MIN	0 V
RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX	60 V
RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN	48 V
PRODUCT CATEGORY	Accessories

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

