

FB-HSB-DP/PA - Converter



2316370

<https://www.phoenixcontact.com/sk/products/2316370>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PROFIBUS DP to PROFIBUS PA coupler system for integration and diagnostics of PROFIBUS PA in PROFIBUS DP. Includes the one-network head station unit (FB-HSB), PROFIBUS DP repeater (FB-DP-RPTR), and PROFIBUS PA interface module with oscilloscope functionality.

Product description

PROFIBUS coupler/link products transparently convert PROFIBUS DP to PROFIBUS PA, while providing detailed network diagnostics and an oscilloscope feature for PROFIBUS PA

Your advantages

- Powerful, embedded web server for configuration and access to network diagnostics
- Manage and configure PROFIBUS field devices using FDT/DTM
- Auto detect any baud rate up to 12 Mbps transparently
- One communication interface module can drive up to ten individual PROFIBUS DP or PROFIBUS PA modules

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 2316370 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DNC |
| Product key | DNC135 |
| Catalog page | Page 460 (C-6-2019) |
| GTIN | 4055626020471 |
| Weight per piece (including packing) | 850.4 g |
| Weight per piece (excluding packing) | 850.4 g |
| Customs tariff number | 85176200 |
| Country of origin | NL |

FB-HSB-DP/PA - Converter

2316370

<https://www.phoenixcontact.com/sk/products/2316370>



Set consists of

FB-DP-RPTR - Repeater

2316373

<https://www.phoenixcontact.com/sk/products/2316373>



PROFIBUS DP interface/repeater module

FB-PA/SC - Repeater

2316375

<https://www.phoenixcontact.com/sk/products/2316375>



PROFIBUS PA interface module with oscilloscope

FB-HSB-DP/PA - Converter

2316370

<https://www.phoenixcontact.com/sk/products/2316370>



FB-HSB - Converter

2316379

<https://www.phoenixcontact.com/sk/products/2316379>



Head station for monitoring one PROFIBUS network

FB-HSB-DP/PA - Converter

2316370

<https://www.phoenixcontact.com/sk/products/2316370>



Technical data

Product properties

| | |
|--------------|----------------|
| Product type | Device coupler |
|--------------|----------------|

Electrical properties

Supply

| | |
|--------------------------|-------------------------|
| Supply voltage range | 10.8 V DC ... 26.4 V DC |
| Max. current consumption | 800 mA |

Connection data

Supply

| | |
|-----------------------------------|---|
| Conductor cross section, flexible | 0.20 mm ² ... 2.50 mm ² |
| Conductor cross section, rigid | 0.20 mm ² ... 2.50 mm ² |
| Conductor cross section AWG | 24 ... 12 |

Interfaces

Data: Ethernet

| | |
|---------------------------------------|---------------------|
| Connection method | RJ45 |
| No. of channels | 1 |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section, rigid max. | 2.5 mm ² |
| Conductor cross section, rigid min. | 0.2 mm ² |
| Conductor cross section AWG max. | 12 |
| Conductor cross section AWG min. | 24 |

Dimensions

| | |
|---------------------|--------|
| Dimensional drawing | |
| Width | 75 mm |
| Height | 100 mm |
| Depth | 132 mm |

Material specifications

| | |
|-------|-------|
| Color | green |
|-------|-------|

Environmental and real-life conditions

Ambient conditions

| | |
|--|-------------------------------|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -20 °C ... 60 °C |
| Altitude | 2000 m |
| Permissible humidity (operation) | 5 % ... 95 % (non-condensing) |
| Permissible humidity (storage/transport) | 5 % ... 95 % (non-condensing) |

Approvals

Conformity/Approvals

| | |
|------------------|-------------------|
| UL, USA / Canada | UL 508 Listed |
| UL, Canada | CSA C22.2 No. 142 |

Standards and regulations

Standards/regulations

| | |
|-----------------------|--|
| Standards/regulations | Ring wave noise immunity in acc. with IEC 61000-4-12 |
|-----------------------|--|

Standards/regulations

| | |
|-----------------------|-----------------------------------|
| Standards/regulations | Dry heat in acc. with IEC 61131-2 |
|-----------------------|-----------------------------------|

Standards/regulations

| | |
|-----------------------|------------------------------------|
| Standards/regulations | Damp heat in acc. with IEC 61131-2 |
|-----------------------|------------------------------------|

Standards/regulations

| | |
|-----------------------|--|
| Standards/regulations | Shock and vibration in acc. with EN 61131-2 and EN 50178 |
|-----------------------|--|

PROFIBUS standardization

| | |
|-----------------------|-------------|
| Standards/regulations | IEC 61158-2 |
|-----------------------|-------------|

Mounting

| | |
|-------------------|--|
| Mounting type | DIN rail: 35 mm |
| Mounting position | On horizontal DIN rail NS 35 in acc. with EN 60715 |

FB-HSB-DP/PA - Converter


2316370

<https://www.phoenixcontact.com/sk/products/2316370>



Drawings

Dimensional drawing

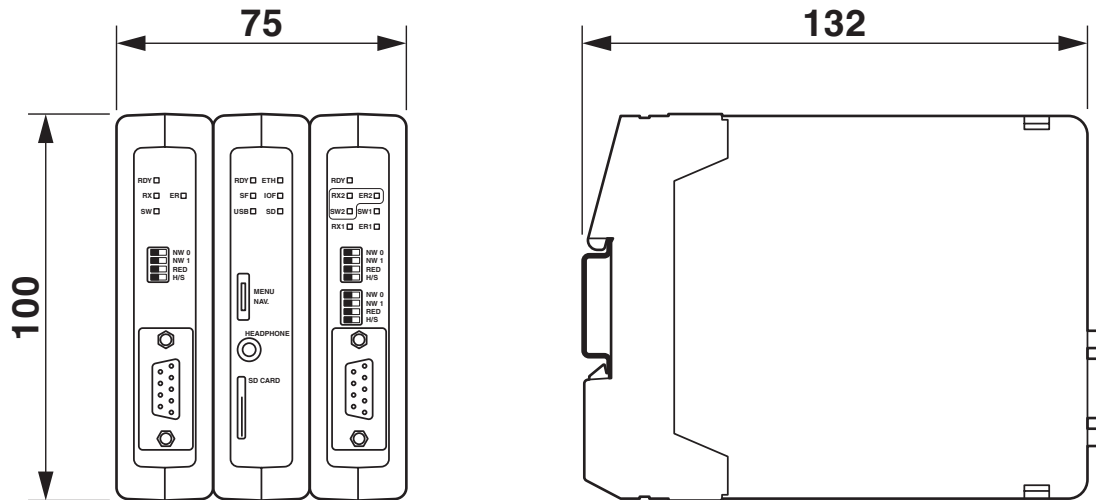

FB-HSB-DP/PA - Converter

2316370

<https://www.phoenixcontact.com/sk/products/2316370>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27242608 |
| ECLASS-12.0 | 27242608 |
| ECLASS-13.0 | 27242608 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001604 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 32151600 |
|-------------|----------|

FB-HSB-DP/PA - Converter

2316370

<https://www.phoenixcontact.com/sk/products/2316370>



Environmental product compliance

| | |
|------------|--|
| China RoHS | Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |
|------------|--|

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT s.r.o.

Námestie Mateja Korvína 1

811 07 Bratislava

+421 2 3210 1470

obchod.sk@phoenixcontact.com