


VIP-CAB-FLK20/0,14/1,5M - Cable



2318567

<https://www.phoenixcontact.com/pc/products/2318567>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Round cable set; connection 1: IDC/FLK socket strip (1x 20-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 20-position, 90 °-out put); cable length: 1.5 m

Your advantages

- Available in any choice of length
- 10-pos. ... 20-pos.
- Individual serial number
- Connector in accordance with IEC 60603-13
- 1:1 connection

Commercial data

Item number	2318567
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CK2331
Catalog page	Page 500 (C-7-2013)
GTIN	4046356311885
Weight per piece (including packing)	162.1 g
Weight per piece (excluding packing)	162.1 g
Customs tariff number	85444290
Country of origin	DE

VIP-CAB-FLK20/0,14/1,5M - Cable



2318567

<https://www.phoenixcontact.com/pc/products/2318567>

Technical data

Product properties

Product type	System cable
--------------	--------------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Electrical properties

Operating voltage (AC)	≤ 50 V AC
Operating voltage (DC)	≤ 60 V DC
Current (Per path)	≤ 1 A

Cable/line

Cable length	1.5 m
--------------	-------

20X0.14 [PVC]

UL AWM Style	2464/1061
Number of positions	20
Shielded	no
Cable type	20X0.14 [PVC]
Conductor type	Round cable set
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Conductor cross section	20x 0.14 mm ²
Wire diameter incl. insulation	1 mm ±0.03 mm
External cable diameter	7.6 mm ±0.4 mm
Outer sheath, material	Semi-rigid PVC
External sheath, color	gray
Conductor material	Tin-plated Cu litz wires
Cable resistance	≤ 145 Ω/km (20 °C)
Insulation resistance	≥ 20 MΩ*km (20 °C)
Smallest bending radius, fixed installation	64 mm
Smallest bending radius, movable installation	120 mm
Max. bending cycles	5000 (at a radius of ≥ 15x outside diameter)
Halogen-free	no
Flame resistance	IEC 60332-1-2 (raw cable)
	VDE 0842, Part 332-1-2 (raw cable)
	IEC 60332-3-22 (raw cable)
	UL VW-1
	CSA FT-1

VIP-CAB-FLK20/0,14/1,5M - Cable

2318567

<https://www.phoenixcontact.com/pc/products/2318567>



Resistance to oil	can withstand occasional splashes (raw cable)
-------------------	---

Connection data

Field level

Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	20
Exit angle	90 °
Pitch	2.54 mm

Controller level

Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	20
Exit angle	180 °
Pitch	2.54 mm

Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
---------	--


VIP-CAB-FLK20/0,14/1,5M - Cable

2318567

<https://www.phoenixcontact.com/pc/products/2318567>



Drawings

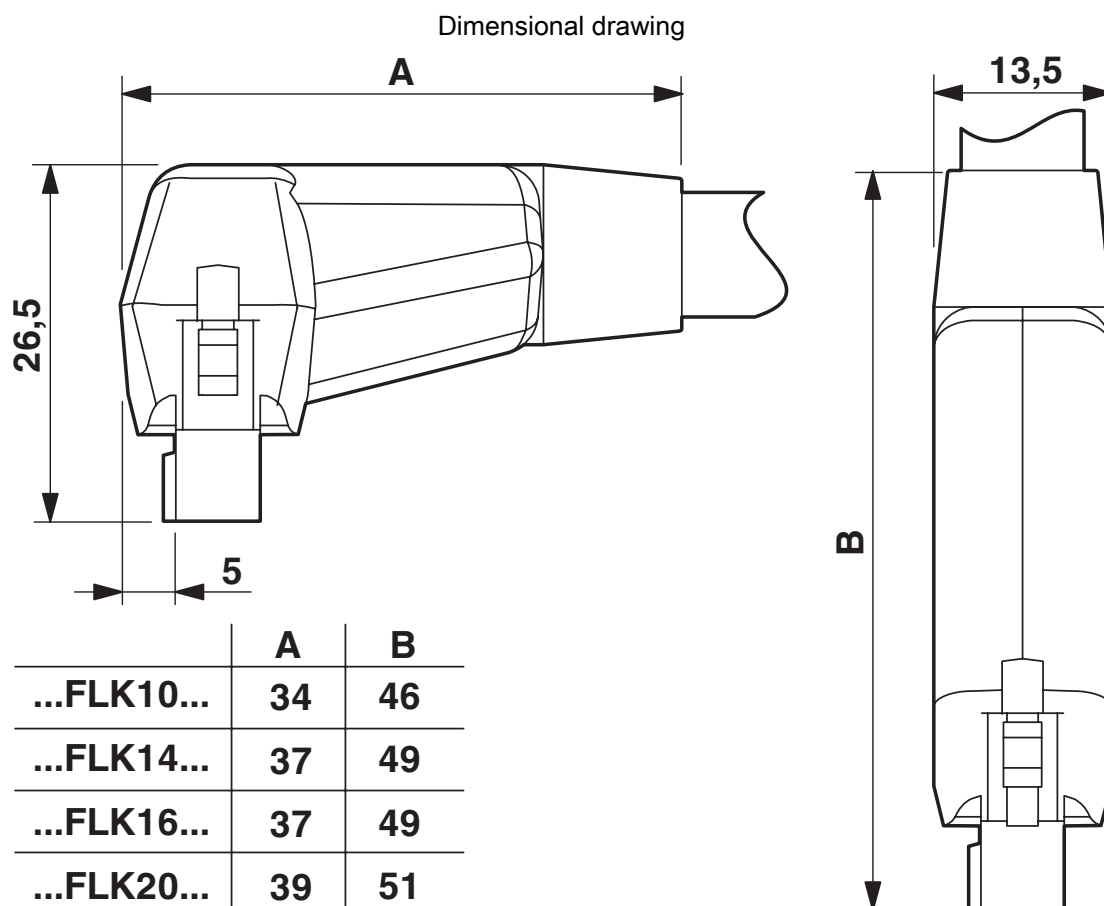

VIP-CAB-FLK20/0,14/1,5M - Cable

2318567

<https://www.phoenixcontact.com/pc/products/2318567>



Classifications

ECLASS

ECLASS-11.0	27242220
-------------	----------

VIP-CAB-FLK20/0,14/1,5M - Cable



2318567

<https://www.phoenixcontact.com/pc/products/2318567>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com