

Screw terminal, 3 poles

Part no.

NZM1-XKS

Article no.

260019



Delivery programme

Space requirement			
Rated current	I_n	A	160
For use with			
For use with			NZM1(-4), PN1(-4), N(S)1(-4)
For use with			Three- and four-pole
Terminal capacities			
Type of conductor			
Cu/Al cable			Copper cable lugs Aluminium cable lug
Terminal capacities			
flexible		mm ²	1 x 10 - 70 2 x 6 - 25 1 x 10 - 35 2 x 10 - 35
AWG/kcmil			
flexible		mm ²	1 x 8 - 2/0 2 x 9 - 4 1 x 8 - 2 2 x 8 - 2
Terminal capacities			
Copper busbar width x thickness			
Busbar	Width	mm	min. 12 x 5 max. 16 x 5
Notes Type contains parts for a terminal located at top or bottom for 3 or 4-pole circuit-breakers. Fitted outside the switch housing Mounting of the cover NZM1(-4)-XKSA obligatory (supplied).			
Notes 1) Up to 95 mm ² can be connected ² depending on the cable manufacturer.			


Approbationen

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E31593
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Suitable for	Refer to main component information

Technische Daten nach ETIM 4.0

Suitable for number of poles			3
Type			-

Dimensions

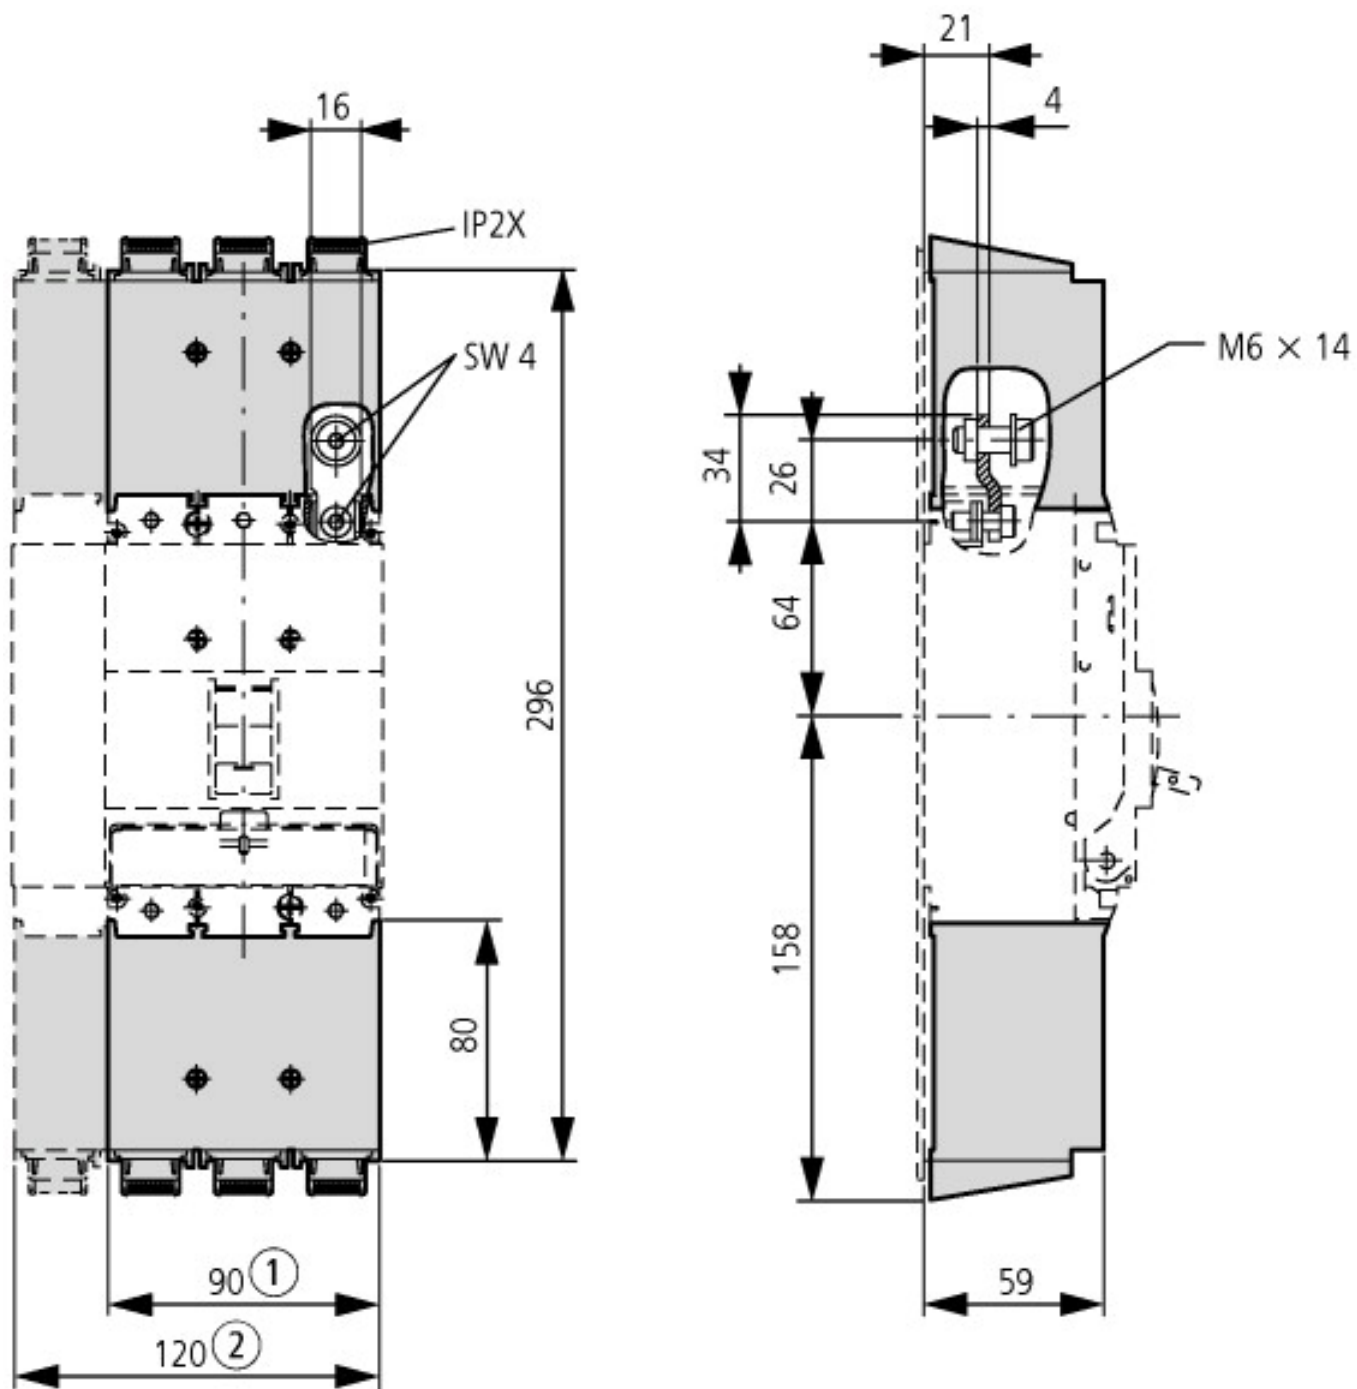

① 3 pole

② 4 pole

Additional product information (links)

AWA1230-2004 (IL01219013Z) Connection options and covers

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/20040905.pdf