



Cable lug 185mm<sup>2</sup>

Part no. NZM3-XKS185

Article no. 260040



not UL/CSA approved

When using cable lugs **without** NZM3(-4)-XKSA cover, they must be insulated.


Delivery programme

			185 mm <sup>2</sup>
For use with			
For use with			NZM3(-4), PN3, N(S)3(-4) NZM4(-4), N(S)4(-4)
For use with			3 and 4 pole
<b>Notes</b>			
Type contains a cable lug for 3-pole or 4-pole switches.			
Special cable lug, narrow style			
<b>Notes</b>			
The following applies for the rated current: The values have been determined conform to IEC/EN 60947 (switchgear standard) and generally relate to the max. defined cross-sections and are intended for the purpose of orientation.			
The engineering standards which apply in each case must be observed.			

Technische Daten nach ETIM 4.0

Identification number			0
Nominal cross section		mm <sup>2</sup>	185
Surface			tinned
Connection thread dimensions, metric			0
Number of fixing holes			1
Extension terminals			flat

Dimensions

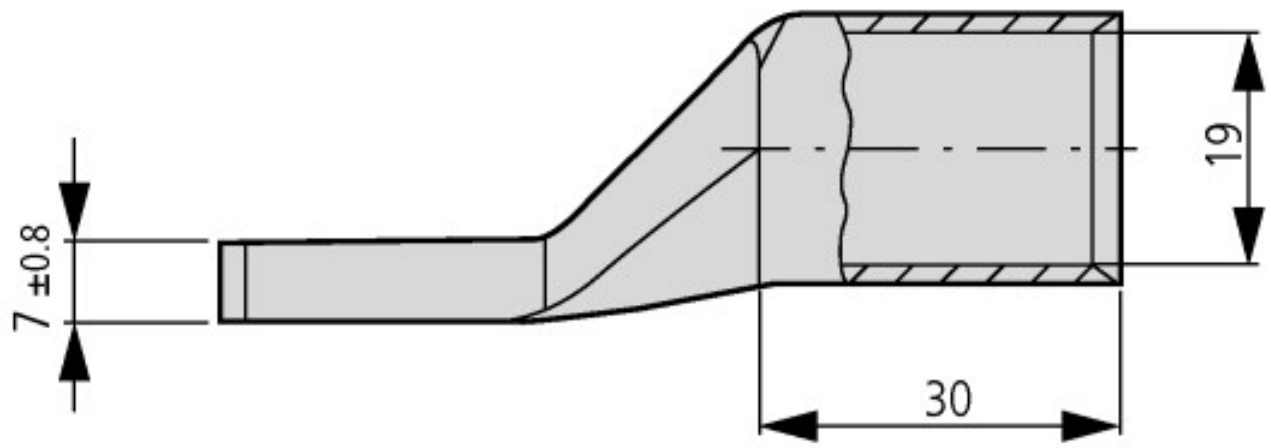

#### Additional product information (links)

AWA1230-2049 (IL01219001Z) cable lugs

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/20491202.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/20491202.pdf)