



Rot. handle,red-yellow,lock.

Part no. NZM3-XDVR

Article no. 260140



Complete with rotary drive

Delivery programme

Function			Red-yellow for emergency switching off
Protection class			IP66 UL/CSA Type 4X, Type 12
Locking facility			lockable on the 0 position on the switch using up to 3 padlocks
Project planning information			Complete with rotary drive Can be combined with insulating surround MODAN handle position detection by wire release can be retrofitted
For use with			NZM3(-4), PN3(-4), N(S)3(-4)
Notes			
Circuit-breaker can also be installed in a lying position 90 ° left/right, with the handle still in the same position.			

Approbationen



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

Technische Daten nach ETIM 4.0


Suitable for switch-disconnector			YES
Suitable for circuit-breakers			YES
With shaft			No
Suitable for emergency switching off			YES
Lockable			YES
Color			red

Dimensions

NZM3-XDV
NZM3-XDVR

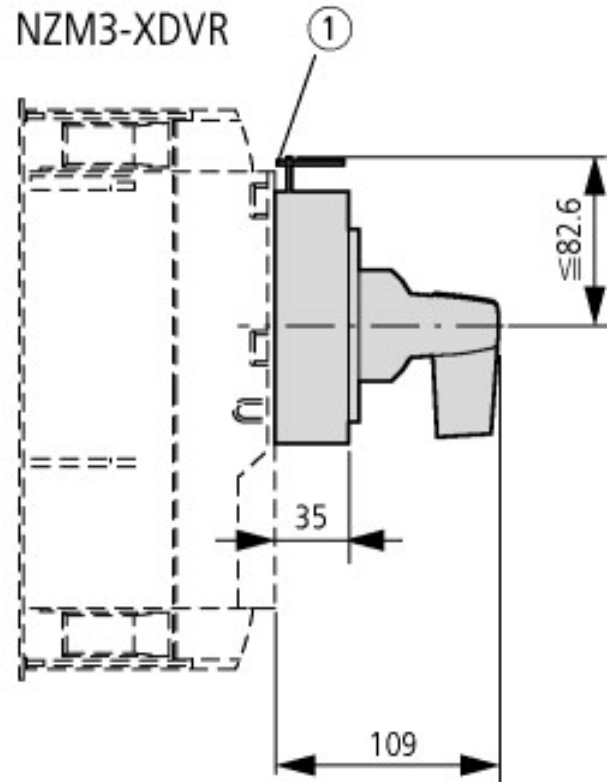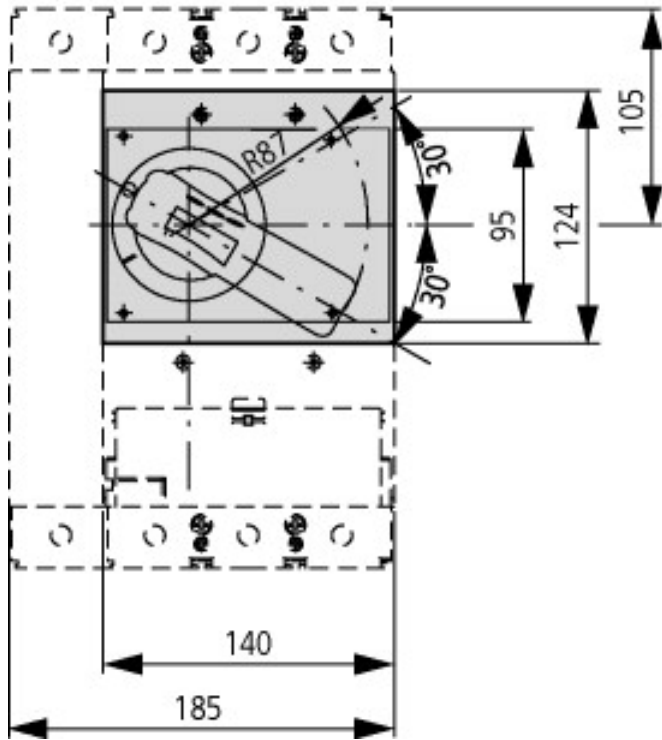

Rotary drive

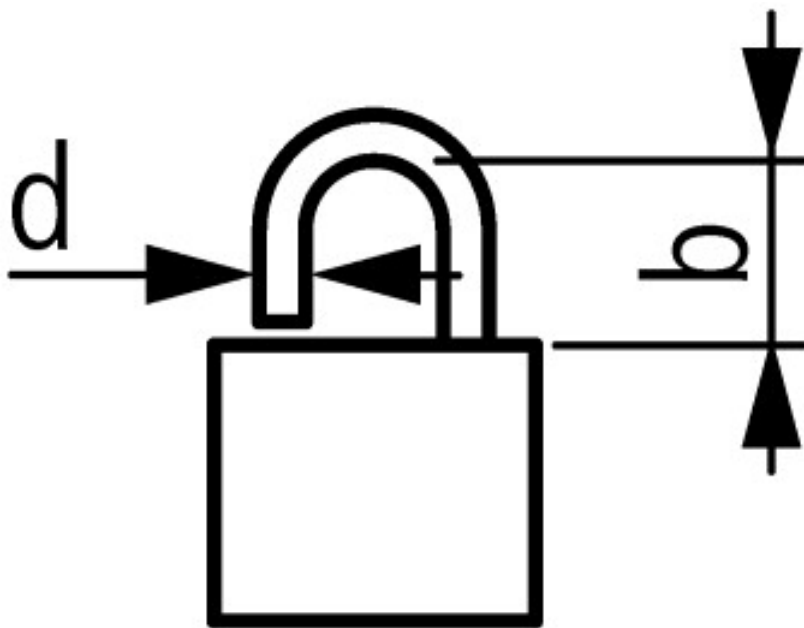

$$d = 4 - 8$$

$$b \geq 34$$

Additional product information (links)

AWA1900-2020 Rotary drive

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/20200410.pdf