

Control circuit terminal, screw

Part no. NZM2-XSTS

Article no. 260156



Delivery programme

For use with			
For use with			NZM2(-4), PN2(-4), N(S)2(-4)
For use with			Three- and four-pole
Terminal capacities			
Type of conductor			
Cu/Al cable			Screw connection
Terminal capacities			
flexible		mm <sup>2</sup>	1 x 0.75 - 2.5 2 x 0.75 - 1.5
AWG/kcmil			
flexible		mm <sup>2</sup>	1 x 18 - 14 2 x 18 - 16
<b>Notes</b>			
Type contains parts for two terminal locations located at top or bottom for 3 or 4-pole circuit-breakers.			
Included as standard with tunnel terminal			
Degree of protection IP1X			
NZM-XSTK cannot be combined with NZM2(-4)-XIPK IP2X protection against contact with a finger.			
Height or thickness of the control circuit terminals:			
NZM-XSTK = 2 mm			
NZM-XSTS = 2 mm			
<b>Notes</b>			
Part contains parts for two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers.			
Included as standard with tunnel terminal			
Degree of protection IP1X			
NZM-XSTK cannot be combined with NZM2(1)-XIPK IP4X protection against contact with a finger.			
Height and thickness of control terminals:			
NZM-XSTK = 2 mm			
NZM-XSTS = 2 mm			


Approbationen

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CEN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Suitable for	Refer to main component information


Technische Daten nach ETIM 4.0

Suitable for number of poles			1
Type			-

Dimensions

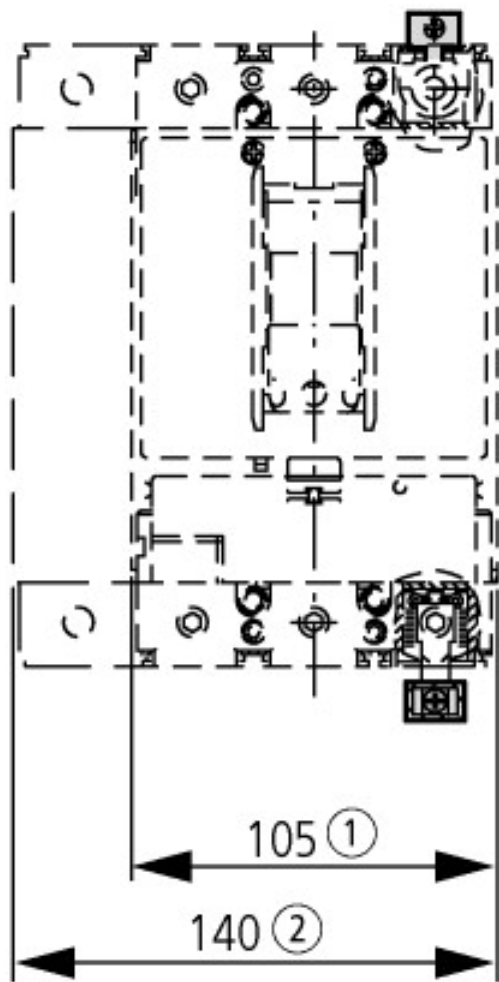

- ① 3 pole
- ② 4 pole

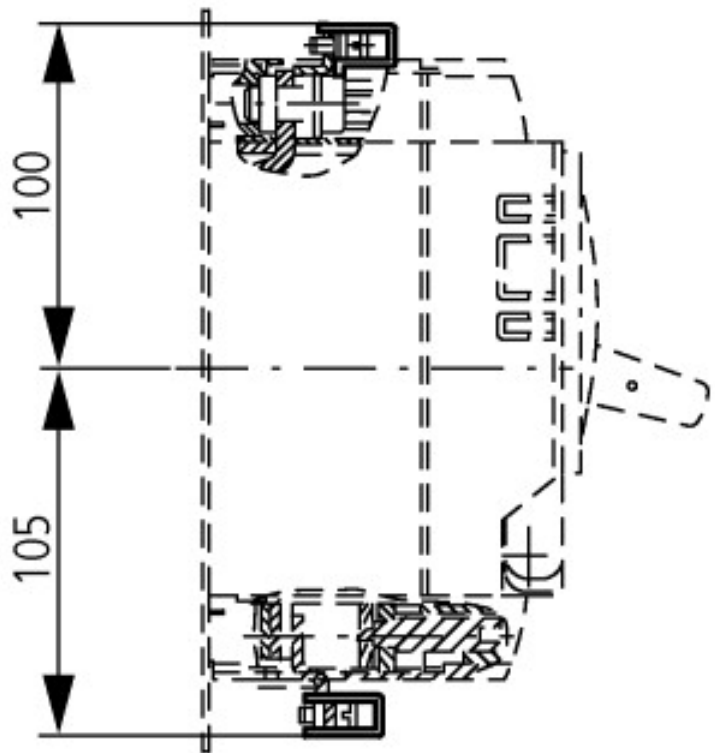

[Additional product information \(links\)](#)