



Extension shaft

Part no. NZM3/4-XV6

Article no. 260193



Delivery programme


			Max. mounting depth: 600 mm
For use with			NZM3(-4), PN3(-4), N(S)3(-4) NZM4(-4), N(S)4(-4)
Notes			
Can be cut to required length			
Notes			
Circuit-breaker can also be installed in a lying position 90 ° left/right, with the handle still in the same position.			

in conjunction with the NZM3-XT(V)D(V)(R) door coupling rotary handle
in conjunction with the NZM4-XT(V)D(V)(R) door coupling rotary handle


Technische Daten nach ETIM 4.0

Cross-section width		mm	12
Cross-section height		mm	12
Length		mm	600

Dimensions

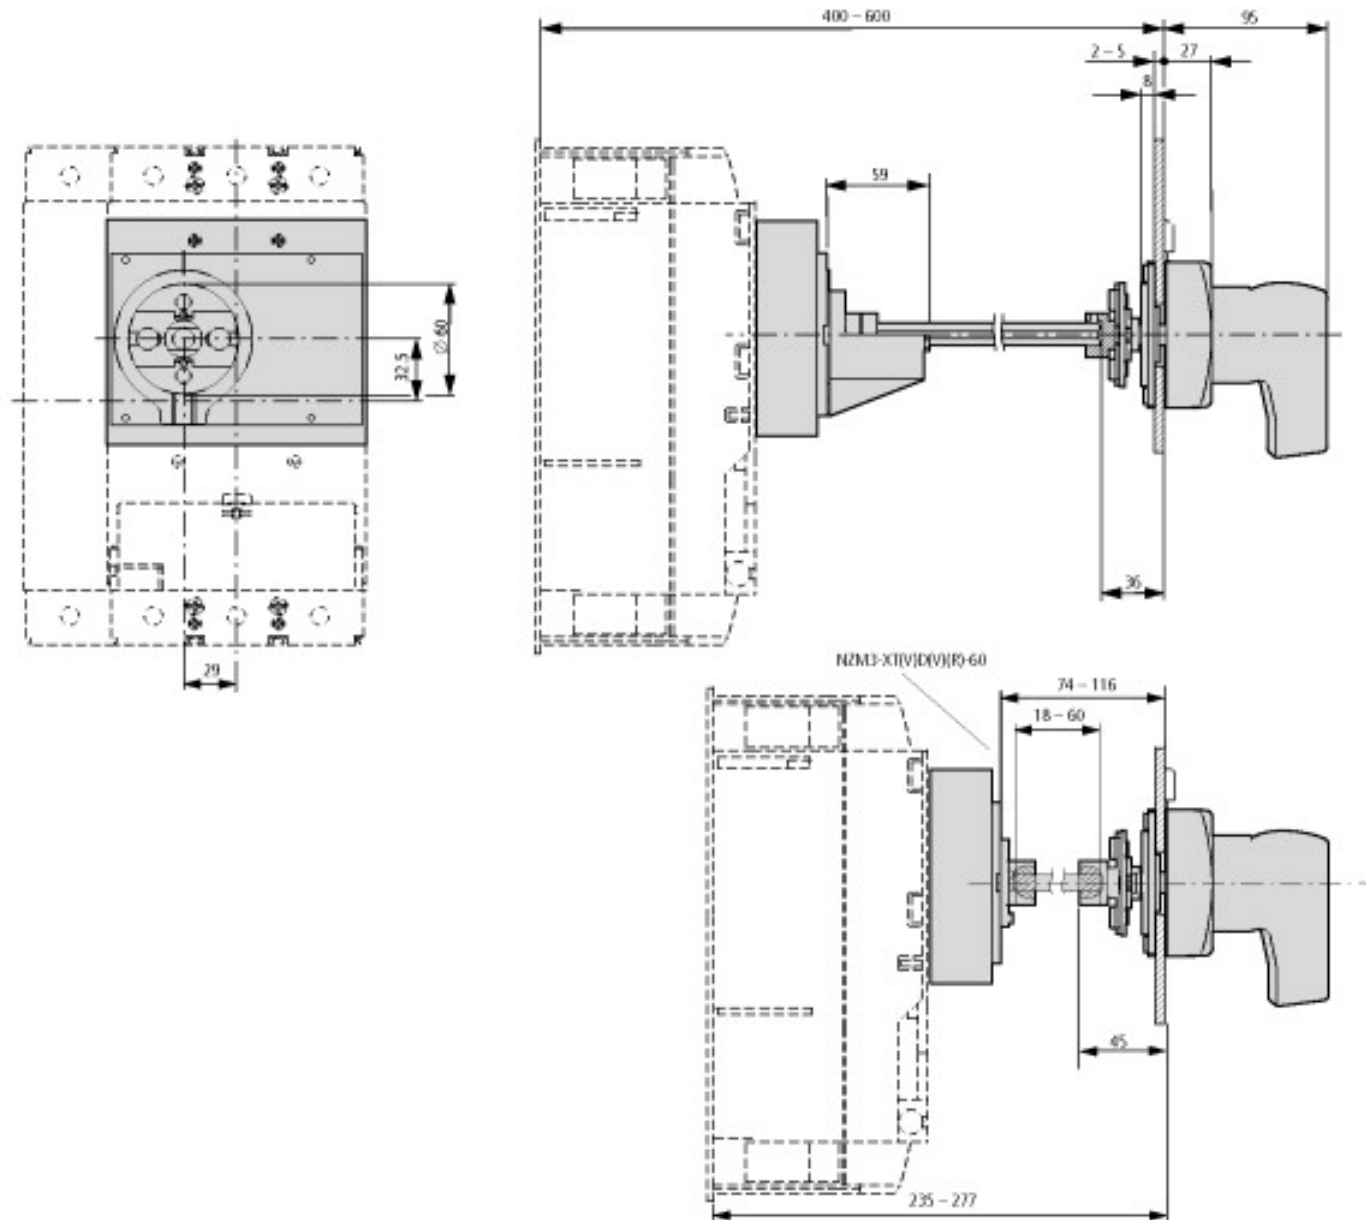

in conjunction with the NZM3-XT(V)D(V)(R) door coupling rotary handle

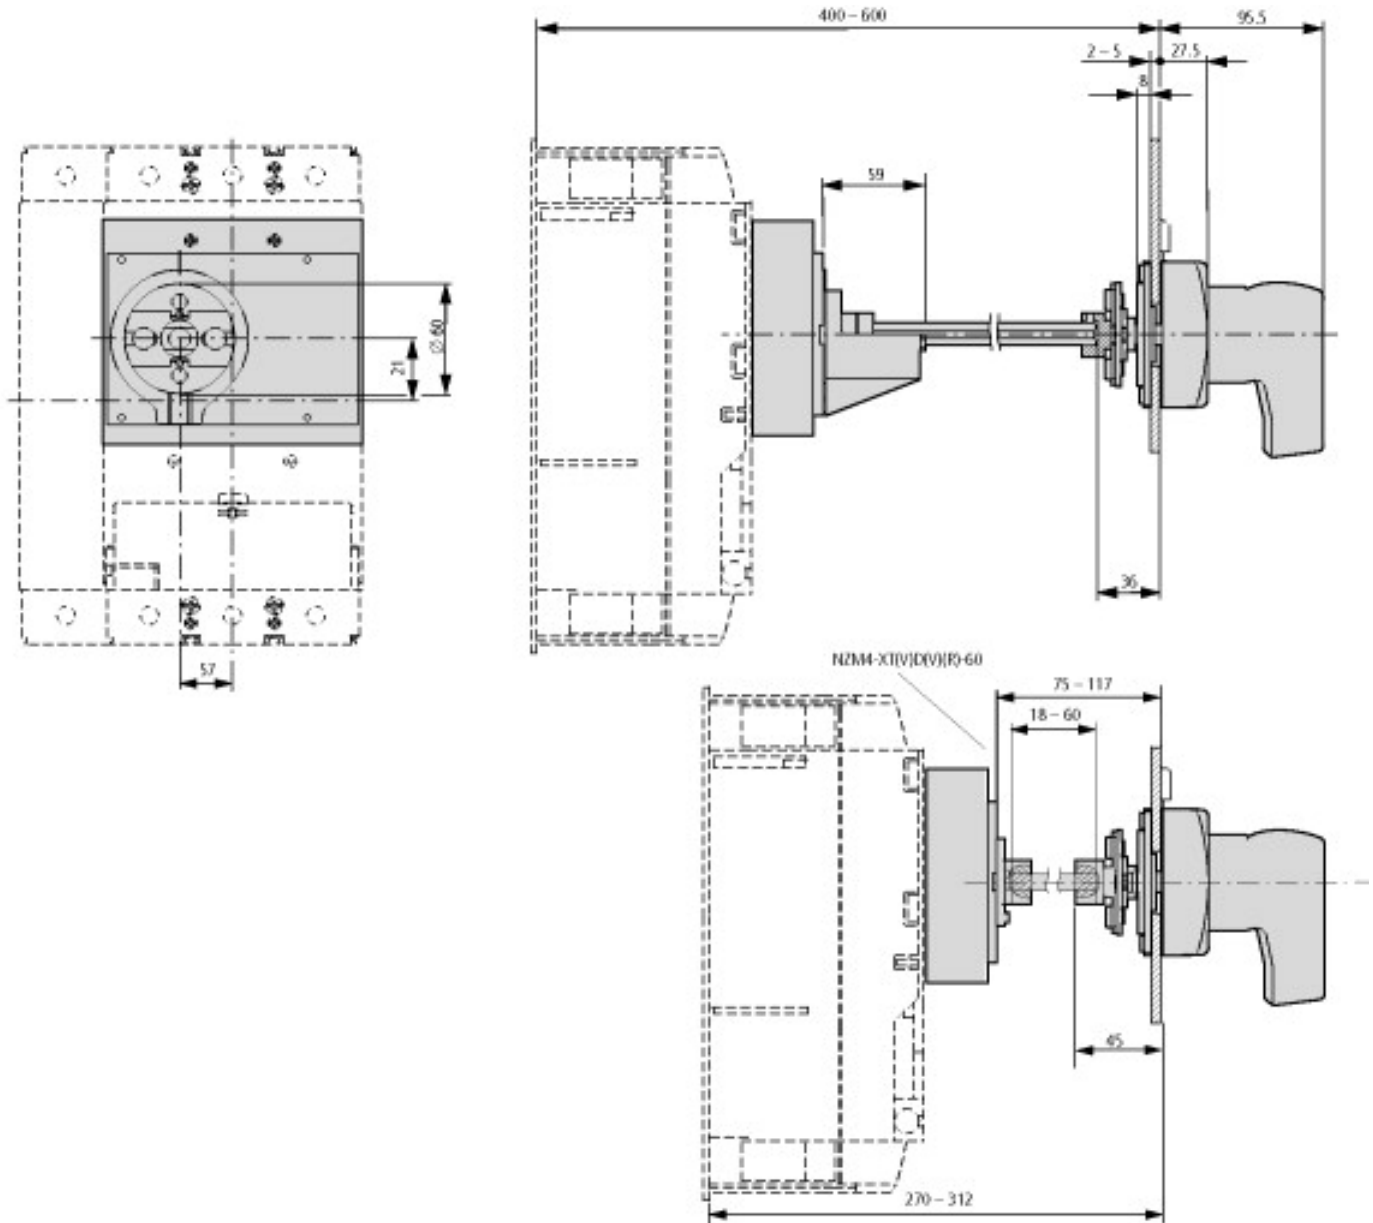

in conjunction with the NZM4-XT(V)D(V)(R) door coupling rotary handle

[Additional product information \(links\)](#)