

Box terminal, 3 poles up to 300A

Part no.

NZM2-250-XKC

Article no.

262244



Delivery programme

Space requirement			
Rated current	I _n	A	300
For use with			
For use with			NZM2(-4), PN2(-4), N(S)2(-4)
For use with			Three- and four-pole
Terminal capacities			
Type of conductor			
Cu/Al cable			Copper conductors Cu cable
Terminal capacities			
flexible		mm ²	1 x 10 - 185 2 x 4 - 70
AWG/kcmil			
flexible		mm ²	1 x 11 - 350 2 x 12 - 2/0
Terminal capacities			
Cu strip (number of segments x width x segment thickness)			
flexible		mm ²	2 x 9 x 0.8
Notes			
Type suffix and type contain parts for a circuit-breaker side at top or bottom for 3 or 4 pole circuit-breakers.			
Conversion kit for circuit-breaker with screw connection.			
Fitted within the switch housing			
0 = for fitting at the top			
U = for fitting at the bottom			
U _e 525 V AC:			
• Use cover NZM2(4)-XKSA.			
Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules.			
Notes			
1) up to 240 mm depending on cable manufacturer ² can be connected depending on the cable manufacturer.			


Approbationen

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E31593
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1432-01
NA Certification	UL Listed, CSA certified
Suitable for	Refer to main component information

Technische Daten nach ETIM 4.0

Suitable for number of poles		3
Type		-

Dimensions

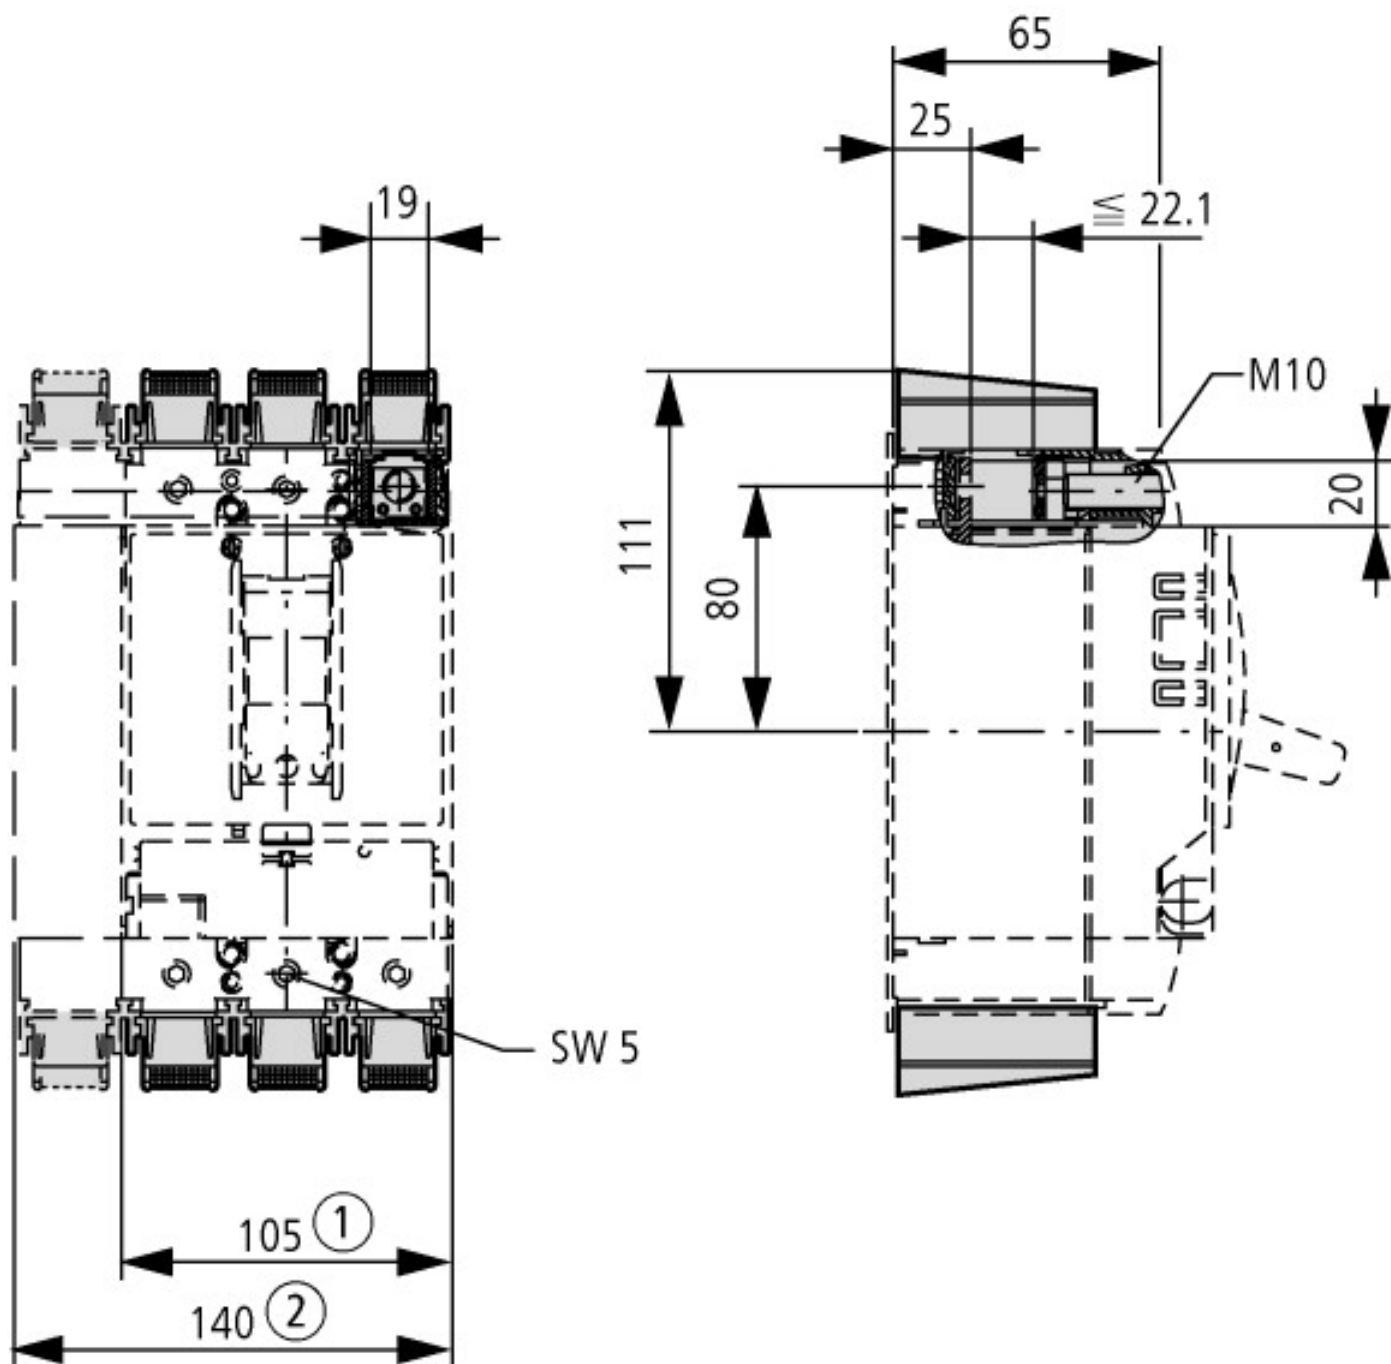

① 3-pole

② 4-pole

Additional product information (links)

IL01206005Z (AWA1230-1917) Box terminal block

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01206005Z2010_11.pdf