

Main switch assembly kit, left side red

Part no. NZM1-XSRM-L

Article no. 266671



For direct mounting of circuit-breaker and handle in the side wall of the control cabinet

Equipment supplied:

- Door coupling rotary handle
- Mounting brackets
- Special short extension shaft
- External warning plate/designation label in German/English
- Black and yellow flash

For enhanced busbar tag shroud on the incomer side, IP2X protection against contact with a finger can be ordered, → 266744

Other external warning plates/designation labels can be clipped on.

Degree of protection IP66, UL/CSA Type 4X, Type 12

Delivery programme

Equipment supplied			Door coupling rotary handle Mounting brackets Special short extension shaft External warning plate/markings plate in German/English Black and yellow lightning symbol
Function			Red-yellow for emergency switching off
Protection class			IP66 UL/CSA Type 4X, Type 12
Locking facility			lockable in 0 position on handle
Project planning information			External warning plate/designation label can be clipped on. For enhanced busbar tag shroud on the incomer side, please order IP2X protection against contact with a finger.
Actuation			Actuation on the left
For use with			NZM1(-4) PN1(-4), N(S)1(-4)

Notes


Additional terminal arrangement for side wall operator with mounting bracket

NZM1-XS(R)M-..., NZM2-XS(R)M-...


Additional terminals K25, K50, K95, K150 → 093827

Actuation:


3 pole
For operation on the right




For operation on the left



4 pole
For operation on the right



For operation on the left



Mounting areas		MI				MII	
Variation options		V1	V2	V3	V4	V1	V2
Maximum number	K25	2 x	-	-	-	-	-
of additional	K50	-	2 x	-	-	-	-
terminals	K95	-	-	1 x	-	1 x	-
	K150	-	-	1 x	1 x	-	1 x

Example: In mounting area MI, variation option 1 allows the K25 additional terminal to be mounted twice.


Approbationen

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Degree of Protection	IEC: IP66, UL/CSA Type 4X, 12

Technische Daten nach ETIM 4.0

Suitable for switch-disconnector			YES
Suitable for circuit-breakers			YES
With shaft			YES
Suitable for emergency switching off			YES
Lockable			YES
Color			red

Dimensions

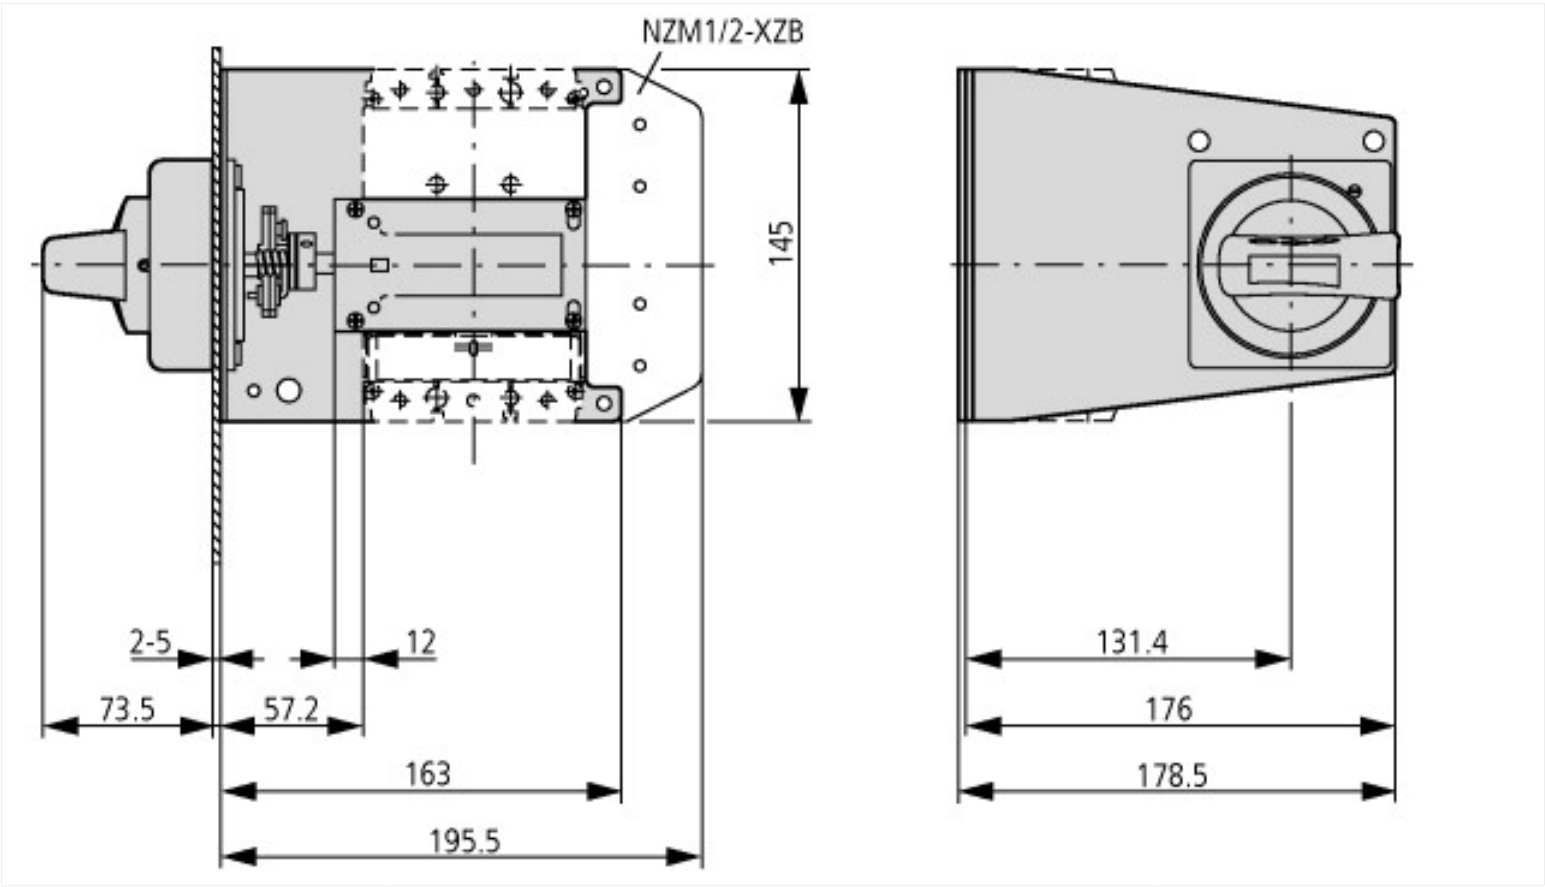

Additional product information (links)

IL01203006Z (AWA1230-2041) Flange operator NZM1	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01203006Z2010_11.pdf
---	---