


Specifications

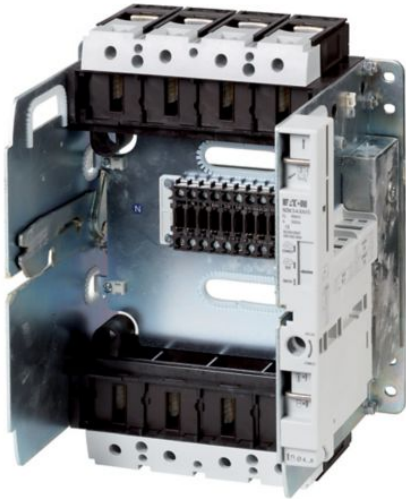

Eaton 266712

Eaton Moeller series NZM - Molded Case Circuit Breaker. Socket base, 4p, 630A

General specifications

PRODUCT NAME	Eaton Moeller series NZM plug-in unit
CATALOG NUMBER	266712
MODEL CODE	NZM3-4-XAVS
EAN	4015082667122
PRODUCT LENGTH/DEPTH	226 mm
PRODUCT HEIGHT	342 mm
PRODUCT WIDTH	272 mm
PRODUCT WEIGHT	13 kg
COMPLIANCES	IEC RoHS conform
CERTIFICATIONS	IEC/EN 60947
GLOBAL CATALOG	266712

Product specifications

FEATURES	Version as built-in device
10.10 TEMPERATURE RISE	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.
10.2.2 CORROSION RESISTANCE	Meets the product standard's requirements.
10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES	Meets the product standard's requirements.
10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT	Meets the product standard's requirements.
10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS	Meets the product standard's requirements.
10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION	Meets the product standard's requirements.
10.2.5 LIFTING	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 MECHANICAL IMPACT	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 INSCRIPTIONS	Meets the product standard's requirements.
10.3 DEGREE OF PROTECTION OF	Does not apply, since the entire switchgear needs to

Resources

BROCHURES	eaton-digital-nzm-brochure-br013003en-en-us.pdf eaton-feerum-the-whole-grain-solution-success-story-en-us.pdf
CATALOGS	eaton-digital-nzm-catalog-ca013003en-en-us.pdf
DRAWINGS	eaton-circuit-breaker-withdrawable-unit-nzm-mccb-dimensions-002.eps eaton-circuit-breaker-padlock-nzm-rotary-handle-dimensions.eps
ECAD MODEL	ETN.266712.edz
INSTALLATION INSTRUCTIONS	eaton-circuit-breaker-withdrawable-unit-nzm3-4-il01219018z.pdf
INSTALLATION VIDEOS	Introduction of the new digital circuit breaker NZM The new digital NZM Range
MCAD MODEL	DA-CS-nzm3_4_xavs DA-CD-nzm3_4_xavs
TECHNICAL DATA SHEETS	eaton-nzm-technical-information-sheet

ASSEMBLIES	be evaluated.
10.4 CLEARANCES AND CREEPAGE DISTANCES	Meets the product standard's requirements.
10.5 PROTECTION AGAINST ELECTRIC SHOCK	Does not apply, since the entire switchgear needs to be evaluated.
10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
FRAME	NZM3
MOUNTING METHOD	Withdrawable
CLIMATIC PROOFING	Damp heat, cyclic, to IEC 60068-2-30 Damp heat, constant, to IEC 60068-2-78
EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT	83.35 W
AMBIENT OPERATING TEMPERATURE - MAX	70 °C
AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
AMBIENT STORAGE TEMPERATURE - MAX	70 °C
AMBIENT STORAGE TEMPERATURE - MIN	40 °C
NOMINAL CURRENT	610 A
PROTECTION AGAINST DIRECT CONTACT	Finger and back-of-hand proof to VDE 0106 part 100
TERMINAL EQUIPMENT INCLUDED	Screw connection
ISOLATION	500 V AC (between auxiliary contacts and main contacts)

	300 V AC (between the auxiliary contacts)
DEGREE OF PROTECTION	IP2X (in the area of the plug-in area)
DIRECTION OF INCOMING SUPPLY	As required
ELECTRICAL CONNECTION TYPE OF MAIN CIRCUIT	Screw connection
MOUNTING POSITION	Vertical and 90° right/left
NUMBER OF POLES	Four-pole
TYPE	Accessory Extension base for basic unit
SHOCK RESISTANCE	20 g (half-sinusoidal shock 20 ms)

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

