

Rear connection 3 poles




Part no. NZM1-XKR

Article no. 266734



not UL/CSA approved


Delivery programme

Rated current	I <sub>n</sub>	A	 160
For use with			
For use with			NZM1(-4), PN1(-4), N(S)1(-4)
For use with			Three- and four-pole
Terminal capacities			
Type of conductor			
Cu/Al cable			Copper cable lugs Aluminium cable lug
Terminal capacities			
flexible		mm <sup>2</sup>	1 x 2.5 - 25 2 x 2.5 - 25 1 x 10 - 35 2 x 10 - 35
Terminal capacities			
Copper busbar width x thickness			
Busbar	Width	mm	 12 x 5  16 x 5
<b>Notes</b>			
Type contains parts for a terminal located at top or bottom for 3 or 4-pole circuit-breakers.			
<b>Notes</b>			
1) Up to 95 mm <sup>2</sup> can be connected <sup>2</sup> depending on the cable manufacturer.			

Technische Daten nach ETIM 4.0

Suitable for number of poles			3
Type			-

Dimensions

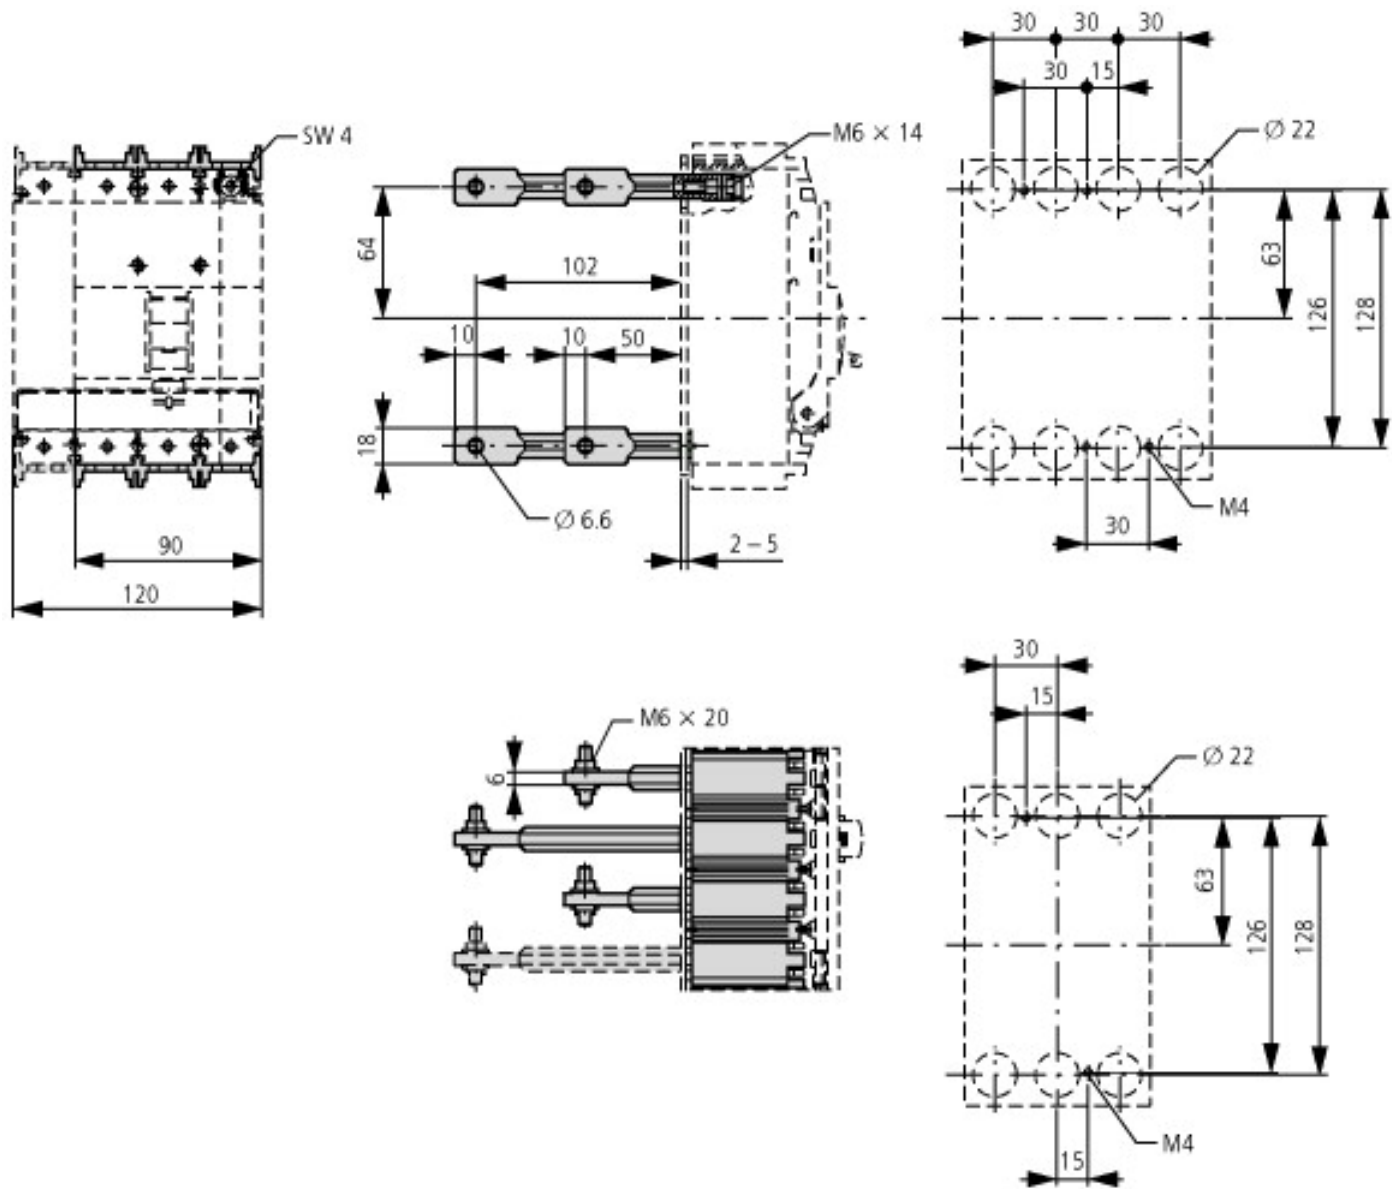

### Additional product information (links)

AWA1230-2042 (IL01219046Z) Connection on rear

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/20420404.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/20420404.pdf)