

Control circuit terminal, terminal

Part no. NZM-XSTK

Article no. 266739



Delivery programme

For use with			
For use with			NZM3(-4), PN3, N(S)3(-4)
For use with			Three- and four-pole
Terminal capacities			
Type of conductor			
Cu/Al cable			Box terminal
Terminal capacities			
flexible		mm ²	1 x 0.75 - 2.5 2 x 0.75 - 1.5
AWG/kcmil			
flexible		mm ²	1 x 18 - 14 2 x 18 - 16

Notes

Part contains parts for two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers.

Included as standard with tunnel terminal

Degree of protection IP1X

NZM-XSTK cannot be combined with NZM2(1)-XIPK IP4X protection against contact with a finger.

Height and thickness of control terminals:

NZM-XSTK = 2 mm

NZM-XSTS = 2 mm

Notes

Part contains parts for two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers.

Included as standard with tunnel terminal

Degree of protection IP1X

NZM-XSTK cannot be combined with NZM2(1)-XIPK IP4X protection against contact with a finger.

Height and thickness of control terminals:

NZM-XSTK = 2 mm

NZM-XSTS = 2 mm


Approbationen

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Suitable for	Refer to main component information


Technische Daten nach ETIM 4.0

Core cross section		mm ²	2.5
With seal head			No
Number of poles			1

Dimensions

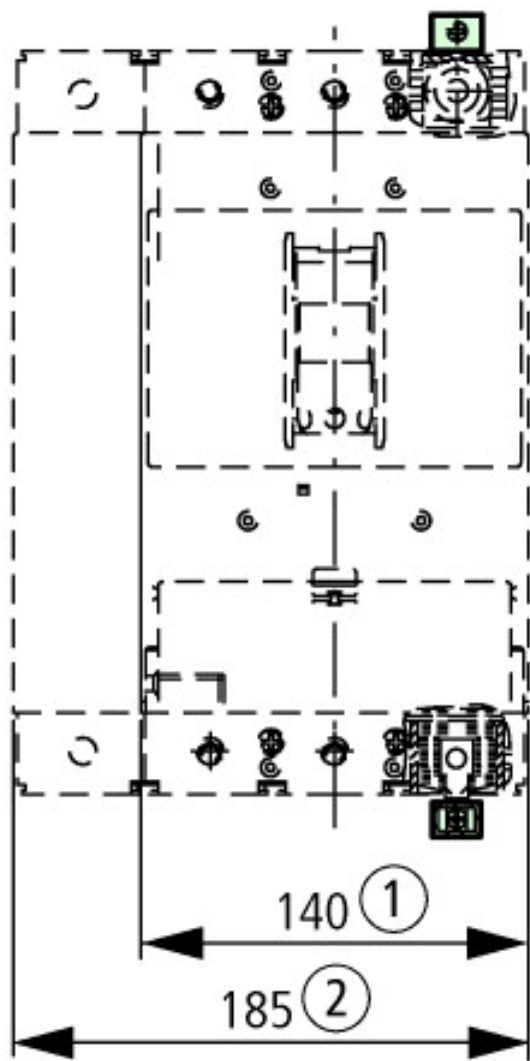

- ① 3 pole
- ② 4 pole

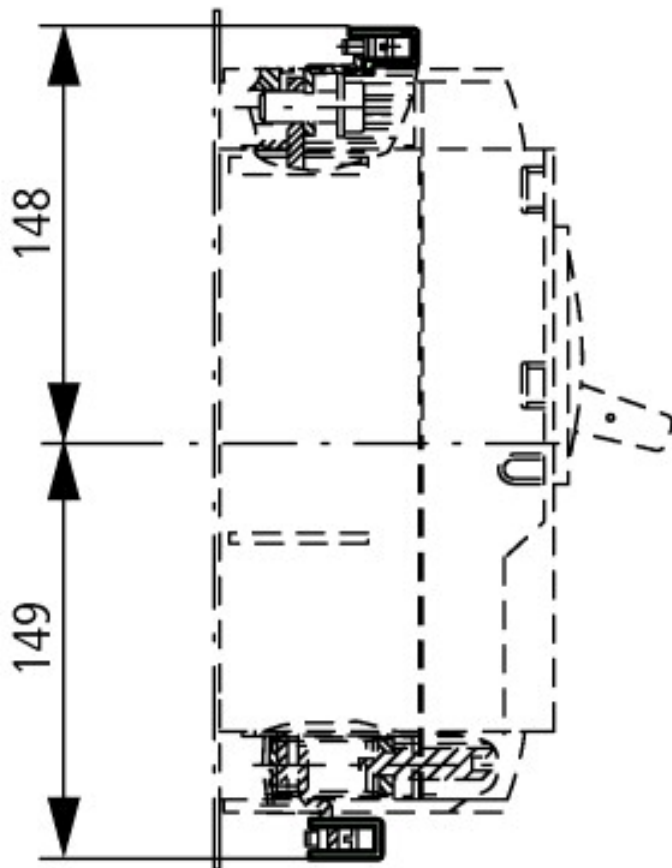

[Additional product information \(links\)](#)