

2700356

<https://www.phoenixcontact.com/ca/products/2700356>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling relay for SIL 3 high and low-demand applications, couples digital output signals to the I/O, 1 enabling current path, 1 confirmation current path, 1 digital signal output, safe state off applications, test pulse filter, fixed screw terminal block

Your advantages

- Up to SIL 3 in accordance with IEC 61508
- Force-guided contacts in accordance with EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- Approved for Class I, Zone 2 applications
- Low housing width of just 6.8 mm
- Long service life thanks to filtering of controller test pulses
- 1 enabling current path, 1 digital signal output, 1 diagnostic current path
- Couples digital output signals from failsafe controllers to I/O devices (valves, etc.) for electrical isolation and power adaptation
- Corrosion protection through protective coating on the PCB

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2700356             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | D21                 |
| Product key                          | DNA172              |
| Catalog page                         | Page 249 (C-6-2019) |
| GTIN                                 | 4046356912891       |
| Weight per piece (including packing) | 164 g               |
| Weight per piece (excluding packing) | 69.773 g            |
| Customs tariff number                | 85364900            |
| Country of origin                    | DE                  |

# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay



2700356

<https://www.phoenixcontact.com/ca/products/2700356>

## Technical data

### Notes

#### Utilization restriction

|            |                                                               |
|------------|---------------------------------------------------------------|
| CCCex note | Use in potentially explosive areas is not permitted in China. |
|------------|---------------------------------------------------------------|

### Product properties

|                |                                                                                      |
|----------------|--------------------------------------------------------------------------------------|
| Product type   | Coupling relay                                                                       |
| Product family | PSRmini                                                                              |
| Application    | Safe switch off                                                                      |
|                | High demand                                                                          |
|                | Low demand                                                                           |
|                | Ex                                                                                   |
| Relay type     | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

#### Times

|                               |                                              |
|-------------------------------|----------------------------------------------|
| Typ. starting time with $U_s$ | < 100 ms (with $U_s$ when controlled via A1) |
| Typical release time          | < 35 ms (when controlled via A1)             |
| Recovery time                 | 500 ms                                       |

### Electrical properties

|                                                 |                                     |
|-------------------------------------------------|-------------------------------------|
| Maximum power dissipation for nominal condition | 3.28 W ( $I_L^2 = 36 \text{ A}^2$ ) |
| Nominal operating mode                          | 100% operating factor               |

#### Air clearances and creepage distances between the power circuits

|                                |                                                                                                                                                                                                                    |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated insulation voltage       | 250 V AC                                                                                                                                                                                                           |
| Rated surge voltage/insulation | Safe isolation, 6 kV reinforced insulation from control circuit, start circuit, confirmation current path, signal output to the enabling current path; 4 kV/basic insulation between all current paths and housing |

#### Supply

|                                            |                                                                    |
|--------------------------------------------|--------------------------------------------------------------------|
| Designation                                | A1/A2                                                              |
| Rated control circuit supply voltage $U_s$ | 20.4 V DC ... 26.4 V DC                                            |
| Rated control circuit supply voltage $U_s$ | 24 V DC -15 % / +10 %                                              |
| Rated control supply current $I_s$         | typ. 45 mA                                                         |
| Power consumption at $U_s$                 | typ. 1.08 W                                                        |
| Inrush current                             | typ. 400 mA ( $\Delta t < 10 \mu\text{s}$ at $U_s$ )               |
| Filter time                                | max. 2 ms (at A1-A2; test pulse width)                             |
|                                            | $\geq 100 \text{ ms}$ (at A1-A2; test pulse rate)                  |
| Protective circuit                         | Serial protection against polarity reversal; Suppressor diode 33 V |

#### Supply

|                                 |                       |
|---------------------------------|-----------------------|
| Designation                     | 21/A2                 |
| Diagnostic supply voltage $U_D$ | 24 V DC -15 % / +10 % |

# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay



2700356

<https://www.phoenixcontact.com/ca/products/2700356>

|                         |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| Input current at $U_D$  | 6 mA (at 21-A2 for $U_D$ ; depending on load + 100 mA at M1 and 22) |
| Inrush current at $U_D$ | typ. 2.5 A ( $\Delta t < 20 \mu s$ at $U_D$ )                       |
| Protective circuit      | Serial protection against polarity reversal; Suppressor diode 38 V  |

## Output data

Relay: Enabling current path (13/14)

|                                                     |                                                      |
|-----------------------------------------------------|------------------------------------------------------|
| Output description                                  | 2 N/O contacts in series, without delay, floating    |
| Number of outputs                                   | 1 (safety-related)                                   |
| Contact switching type                              | 1 enabling current path                              |
| Contact material                                    | AgSnO <sub>2</sub>                                   |
| Switching voltage                                   | min. 12 V AC/DC<br>max. 250 V AC/DC                  |
| Switching capacity                                  | min. 60 mW                                           |
| Inrush current                                      | min. 3 mA<br>max. 6 A                                |
| Switching capacity in accordance with IEC 60947-5-1 | 4 A (24 V (DC13))<br>5 A (250 V (AC15))              |
| Limiting continuous current                         | 6 A (High demand)<br>4 A (Low demand)                |
| Sq. Total current                                   | 36 A <sup>2</sup> (observe derating)                 |
| Switching frequency                                 | max. 1 Hz                                            |
| Mechanical service life                             | 10x 10 <sup>6</sup> cycles                           |
| Output fuse                                         | 6 A gL/gG<br>4 A gL/gG (for low-demand applications) |

Relay: Confirmation current path (21/22)

|                             |                                                                              |
|-----------------------------|------------------------------------------------------------------------------|
| Output description          | 2 N/C contacts in series, without delay, not floating (reference ground: A2) |
| Number of outputs           | 1 (safety-related)                                                           |
| Contact switching type      | 1 confirmation current path                                                  |
| Contact material            | AgCuNi, + Au                                                                 |
| Switching voltage           | min. 20.4 V DC<br>max. 26.4 V DC                                             |
| Switching capacity          | min. 20 mW                                                                   |
| Inrush current              | min. 1 mA<br>max. 100 mA                                                     |
| Limiting continuous current | 100 mA                                                                       |
| Switching frequency         | max. 1 Hz                                                                    |
| Mechanical service life     | 10x 10 <sup>6</sup> cycles                                                   |
| Output fuse                 | 150 mA Fast-blow                                                             |

Signal: M1

|                    |                        |
|--------------------|------------------------|
| Output description | PNP                    |
| Number of outputs  | 1 (non-safety-related) |

# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay



2700356

<https://www.phoenixcontact.com/ca/products/2700356>

|                          |                                               |
|--------------------------|-----------------------------------------------|
| Voltage                  | approx. 22 V DC ( $U_D - 2 \text{ V}$ )       |
| Current                  | max. 100 mA                                   |
| Maximum inrush current   | 500 mA ( $\Delta t = 1 \text{ ms}$ at $U_S$ ) |
| Short-circuit protection | no                                            |
| Output fuse              | 150 mA fast blow                              |

## Connection data

### Connection technology

|           |    |
|-----------|----|
| pluggable | no |
|-----------|----|

### Conductor connection

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Screw connection                            |
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 26 ... 12                                   |
| Stripping length                 | 12 mm                                       |
| Screw thread                     | M3                                          |
| Tightening torque                | 0.5 Nm ... 0.6 Nm                           |

## Signaling

|                           |                |
|---------------------------|----------------|
| Status display            | 2 x green LEDs |
| Operating voltage display | 1 x yellow LED |
| Error indication          | 1 x red LED    |

## Dimensions

|        |          |
|--------|----------|
| Width  | 6.8 mm   |
| Height | 93.1 mm  |
| Depth  | 102.5 mm |

## Material specifications

|                  |                   |
|------------------|-------------------|
| Color (Housing)  | yellow (RAL 1018) |
| Housing material | PBT               |

## Characteristics

### Safety data

|               |   |
|---------------|---|
| Stop category | 0 |
|---------------|---|

### Safety data: EN 50156

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

### Safety data: IEC 61508 - High demand

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

### Safety data: IEC 61508 - Low demand

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay



2700356

<https://www.phoenixcontact.com/ca/products/2700356>

## Environmental and real-life conditions

### Ambient conditions

|                                                |                                                     |
|------------------------------------------------|-----------------------------------------------------|
| Degree of protection                           | IP20                                                |
| Min. degree of protection of inst. location    | IP54                                                |
| Ambient temperature (operation)                | -40 °C ... 70 °C (observe derating)                 |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                                    |
| Maximum altitude                               | ≤ 2000 m (Above sea level)                          |
| Max. permissible humidity (storage/transport)  | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock                                          | 15g                                                 |
| Vibration (operation)                          | 10 Hz ... 150 Hz, 2g                                |

## Approvals

### ATEX

|                |                            |
|----------------|----------------------------|
| Identification | ⊕ II 3G Ex ec nC IIC T4 Gc |
| Certificate    | UL 22 ATEX 2912X           |

### IECEX

|                |                    |
|----------------|--------------------|
| Identification | Ex ec nC IIC T4 Gc |
| Certificate    | IECEX UL 22.0037X  |

### UL, USA/Canada

|                |         |
|----------------|---------|
| Identification | cULus   |
| Certificate    | E140324 |

### UL Ex, USA / Canada

|                |                                                                                                    |
|----------------|----------------------------------------------------------------------------------------------------|
| Identification | Class I, Zone 2, AEx ec nC IIC T4 / Ex ec nC IIC Gc T4 X<br>Class I, Div. 2, Groups A, B, C, D, T4 |
| Certificate    | E360692                                                                                            |

### CE

|                |              |
|----------------|--------------|
| Identification | CE-compliant |
|----------------|--------------|

### Environmental simulation test

|                |            |
|----------------|------------|
| Identification | G3         |
| Certificate    | ISA-S71.04 |

### CCC / China-Ex

|                |                    |
|----------------|--------------------|
| Identification | Ex ec nC IIC T4 Gc |
| Certificate    | 2022122304115695   |

### DNV

|                |             |
|----------------|-------------|
| Identification | C, EMC2     |
| Certificate    | 11253-14 HH |

## Standards and regulations

# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay



2700356

<https://www.phoenixcontact.com/ca/products/2700356>

Air clearances and creepage distances between the power circuits

|                       |                                     |
|-----------------------|-------------------------------------|
| Standards/regulations | EN 60664-1, EN 60079-7, EN 60079-15 |
|-----------------------|-------------------------------------|

### Mounting

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Mounting type         | DIN rail mounting                                 |
| Assembly instructions | See derating curve                                |
| Mounting position     | vertical, horizontal, with front of module upward |


# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay

2700356

<https://www.phoenixcontact.com/ca/products/2700356>


## Drawings

Block diagram

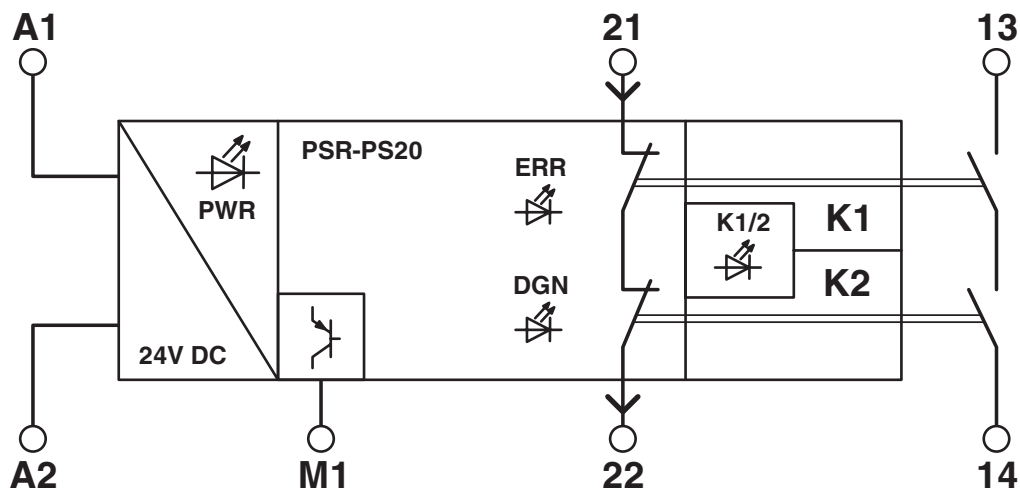

Block diagram

Circuit diagram

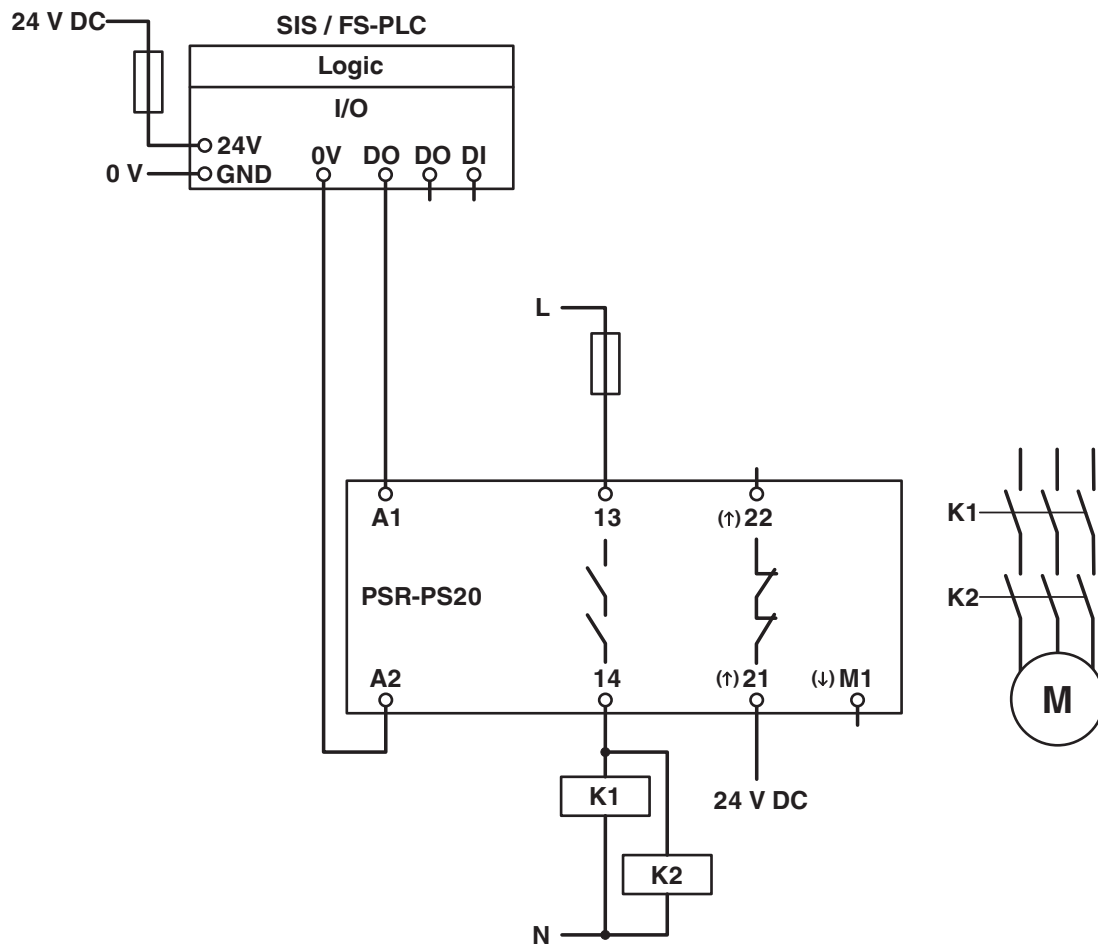

# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay



2700356

<https://www.phoenixcontact.com/ca/products/2700356>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/2700356>



### EAC

Approval ID: RU C-DE.A\*30.B.01082



### DNV GL

Approval ID: TAA00002VZ



### UL Listed

Approval ID: FILE E 140324



### cUL Listed

Approval ID: FILE E 140324



### Functional Safety

Approval ID: 44-780-13755203



### Functional Safety

Approval ID: 44-205-13755205



### IECEx

Approval ID: IECEx ULD 14.0003 X



### cUL Listed

Approval ID: File E 360692



### UL Listed

Approval ID: File E 360692



### ATEX

Approval ID: DEMKO 14 ATEX 1284 X

cULus Listed



# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay

2700356

<https://www.phoenixcontact.com/ca/products/2700356>



cULus Listed

# PSR-PS20-1NO-1NC-24DC-SC - Coupling relay



2700356

<https://www.phoenixcontact.com/ca/products/2700356>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27371819 |
| ECLASS-13.0 | 27371819 |
| ECLASS-12.0 | 27371819 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

## Environmental product compliance

### EU RoHS

|                                         |              |
|-----------------------------------------|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | c1b16ea8-35eb-4ce7-b131-533eac3d3e32 |