

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling relay for SIL 3 high- and low-demand applications, couples digital output signals to the periphery, 1 enabling current path, 1 confirmation current path, 1 digital signal output, safe state off applications, test pulse filter, TBUS connection, pluggable Push-in terminal block

## Your advantages

- Up to SIL 3 in accordance with IEC 61508
- Force-guided contacts in accordance with EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- Approved for Class I, Zone 2 applications
- Low housing width of just 12.5 mm
- Enabling current path protected via internal fuse as an option
- Long service life thanks to filtering of controller test pulses
- 1 enabling current path, 1 digital signal output, 1 diagnostic current path
- Couples digital output signals from failsafe controllers to I/O devices (valves, etc.) for electrical isolation and power adaptation
- Corrosion protection through protective coating on the PCB

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2700578             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | DN01                |
| Product key                          | DNA182              |
| Catalog page                         | Page 252 (C-6-2019) |
| GTIN                                 | 4046356916400       |
| Weight per piece (including packing) | 199.8 g             |
| Weight per piece (excluding packing) | 182.1 g             |
| Customs tariff number                | 85364900            |
| Country of origin                    | DE                  |

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

## Technical data

### Notes

#### Utilization restriction

|            |                                                               |
|------------|---------------------------------------------------------------|
| CCCex note | Use in potentially explosive areas is not permitted in China. |
|------------|---------------------------------------------------------------|

### Product properties

|                |                                                                                      |
|----------------|--------------------------------------------------------------------------------------|
| Product type   | Coupling relay                                                                       |
| Product family | PSRmini                                                                              |
| Application    | Safe switch off                                                                      |
|                | High demand                                                                          |
|                | Low demand                                                                           |
|                | Ex                                                                                   |
| Relay type     | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

#### Times

|                               |                                              |
|-------------------------------|----------------------------------------------|
| Typ. starting time with $U_s$ | < 100 ms (with $U_s$ when controlled via A1) |
| Typical release time          | < 35 ms (when controlled via A1)             |
| Recovery time                 | 500 ms                                       |

### Electrical properties

|                                                 |                                     |
|-------------------------------------------------|-------------------------------------|
| Maximum power dissipation for nominal condition | 3.43 W ( $I_L^2 = 36 \text{ A}^2$ ) |
| Nominal operating mode                          | 100% operating factor               |

#### Air clearances and creepage distances between the power circuits

|                                |                                                                                                                                                                                                                    |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated insulation voltage       | 250 V AC                                                                                                                                                                                                           |
| Rated surge voltage/insulation | Safe isolation, 6 kV reinforced insulation from control circuit, start circuit, confirmation current path, signal output to the enabling current path; 4 kV/basic insulation between all current paths and housing |

#### Supply

|                                            |                                                                    |
|--------------------------------------------|--------------------------------------------------------------------|
| Designation                                | A1/A2                                                              |
| Rated control circuit supply voltage $U_s$ | 20.4 V DC ... 26.4 V DC                                            |
| Rated control circuit supply voltage $U_s$ | 24 V DC -15 % / +10 %                                              |
| Rated control supply current $I_s$         | typ. 50 mA                                                         |
| Power consumption at $U_s$                 | typ. 1.2 W                                                         |
| Inrush current                             | typ. 400 mA ( $\Delta t < 10 \mu\text{s}$ at $U_s$ )               |
| Filter time                                | max. 2 ms (at A1-A2; test pulse width)                             |
|                                            | $\geq 100 \text{ ms}$ (at A1-A2; test pulse rate)                  |
| Protective circuit                         | Serial protection against polarity reversal; Suppressor diode 33 V |

#### Supply

|                                 |                       |
|---------------------------------|-----------------------|
| Designation                     | 31/A2, TBUS           |
| Diagnostic supply voltage $U_D$ | 24 V DC -15 % / +10 % |

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

|                         |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| Input current at $U_D$  | 6 mA (at 31-A2 for $U_D$ ; depending on load + 100 mA at M1 and 32) |
| Inrush current at $U_D$ | typ. 2.5 A ( $\Delta t < 20 \mu s$ at $U_D$ )                       |
| Protective circuit      | Serial protection against polarity reversal; Suppressor diode 33 V  |

## Output data

### Relay: Enabling current path

|                                                     |                                                                                                                         |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Output description                                  | 2 N/O contacts in series, without delay, floating                                                                       |
| Number of outputs                                   | 1 (safety-related N/O contacts: 13/14 (13F/14))                                                                         |
| Contact switching type                              | 1 enabling current path                                                                                                 |
| Contact material                                    | AgSnO <sub>2</sub>                                                                                                      |
| Switching voltage                                   | min. 12 V AC/DC<br>max. 250 V AC/DC (Observe the load curve)                                                            |
| Switching capacity                                  | min. 60 mW                                                                                                              |
| Inrush current                                      | min. 3 mA<br>max. 6 A (N/O contact 13/14)<br>4 A (N/O contact 13F/14)                                                   |
| Switching capacity in accordance with IEC 60947-5-1 | 4 A (24 V (DC13); N/O contact 13/14)<br>5 A (250 V (AC15); N/O contact 13/14)<br>4 A (250 V (AC15); N/O contact 13F/14) |
| Limiting continuous current                         | 6 A (13/14 for high-demand)<br>4 A (13F/14 with high/low demand, 13/14 with low demand)                                 |
| Sq. Total current                                   | 36 A <sup>2</sup> (13/14, see to derating)<br>16 A <sup>2</sup> (13F/14, see to derating)                               |
| Switching frequency                                 | max. 0.5 Hz                                                                                                             |
| Mechanical service life                             | 10x 10 <sup>6</sup> cycles                                                                                              |
| Output fuse                                         | 6 A gL/gG (N/O contact 13/14)<br>4 A gL/gG (for low-demand applications)                                                |

### Relay: Confirmation current path

|                             |                                                                              |
|-----------------------------|------------------------------------------------------------------------------|
| Output description          | 2 N/C contacts in series, without delay, not floating (reference ground: A2) |
| Number of outputs           | 1 (safety-related N/C contacts: 31/32)                                       |
| Contact switching type      | 1 confirmation current path                                                  |
| Contact material            | AgCuNi, + Au                                                                 |
| Switching voltage           | min. 20.4 V DC<br>max. 26.4 V DC                                             |
| Switching capacity          | min. 20 mW                                                                   |
| Inrush current              | min. 1 mA<br>max. 100 mA                                                     |
| Limiting continuous current | 100 mA                                                                       |
| Switching frequency         | max. 0.5 Hz                                                                  |
| Mechanical service life     | 10x 10 <sup>6</sup> cycles                                                   |
| Output fuse                 | 150 mA Fast-blow                                                             |

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

Signal: M1

|                          |                                               |
|--------------------------|-----------------------------------------------|
| Output description       | PNP                                           |
| Number of outputs        | 1 (non-safety-related)                        |
| Voltage                  | approx. 22 V DC ( $U_D - 2 \text{ V}$ )       |
| Current                  | max. 100 mA                                   |
| Maximum inrush current   | 500 mA ( $\Delta t = 1 \text{ ms}$ at $U_s$ ) |
| Short-circuit protection | no                                            |
| Output fuse              | 150 mA fast blow                              |

## Connection data

Connection technology

|           |     |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

Conductor connection

|                                                                       |                                                                              |
|-----------------------------------------------------------------------|------------------------------------------------------------------------------|
| Connection method                                                     | Push-in connection                                                           |
| Conductor cross section rigid                                         | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                  |
| Conductor cross section flexible                                      | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                  |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6) |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6) |
| Conductor cross-section AWG                                           | 24 ... 16                                                                    |
| Stripping length                                                      | 8 mm                                                                         |

## Signaling

|                           |                |
|---------------------------|----------------|
| Status display            | 1 x green LED  |
| Operating voltage display | 1 x yellow LED |
| Error indication          | 1 x red LED    |

## Dimensions

|        |          |
|--------|----------|
| Width  | 12.5 mm  |
| Height | 116.6 mm |
| Depth  | 114.5 mm |

## Material specifications

|                  |                   |
|------------------|-------------------|
| Color (Housing)  | yellow (RAL 1018) |
| Housing material | Polyamide         |

## Characteristics

Safety data

|               |   |
|---------------|---|
| Stop category | 0 |
|---------------|---|

Safety data: EN 50156

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

Safety data: IEC 61508 - High demand

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

Safety data: IEC 61508 - Low demand

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

## Environmental and real-life conditions

### Ambient conditions

|                                                |                                                     |
|------------------------------------------------|-----------------------------------------------------|
| Degree of protection                           | IP20                                                |
| Min. degree of protection of inst. location    | IP54                                                |
| Ambient temperature (operation)                | -40 °C ... 70 °C (observe derating)                 |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                                    |
| Maximum altitude                               | ≤ 2000 m (Above sea level)                          |
| Max. permissible humidity (storage/transport)  | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock                                          | 15g                                                 |
| Vibration (operation)                          | 10 Hz ... 150 Hz, 2g                                |

## Approvals

### ATEX

|                |                            |
|----------------|----------------------------|
| Identification | ⊕ II 3G Ex ec nC IIC T4 Gc |
| Certificate    | UL 22 ATEX 2912X           |

### IECEX

|                |                    |
|----------------|--------------------|
| Identification | Ex ec nC IIC T4 Gc |
| Certificate    | IECEX UL 22.0037X  |

### UL, USA/Canada

|                |         |
|----------------|---------|
| Identification | cULus   |
| Certificate    | E140324 |

### UL Ex, USA / Canada

|                |                                                          |
|----------------|----------------------------------------------------------|
| Identification | Class I, Zone 2, AEx nA nC IIC T4 / Ex nA nC IIC Gc T4 X |
|                | Class I, Div. 2, Groups A, B, C, D, T4                   |
| Certificate    | E360692                                                  |

### CE

|                |              |
|----------------|--------------|
| Identification | CE-compliant |
|----------------|--------------|

### Environmental simulation test

|                |            |
|----------------|------------|
| Identification | G3         |
| Certificate    | ISA-S71.04 |

### CCC / China-Ex

|                |                    |
|----------------|--------------------|
| Identification | Ex ec nC IIC T4 Gc |
| Certificate    | 2022122304115695   |

### DNV

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

|                |             |
|----------------|-------------|
| Identification | C, EMC2     |
| Certificate    | 11253-14 HH |

## Standards and regulations

Air clearances and creepage distances between the power circuits

|                       |                                     |
|-----------------------|-------------------------------------|
| Standards/regulations | EN 60664-1, EN 60079-7, EN 60079-15 |
|-----------------------|-------------------------------------|

## Mounting

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Mounting type         | DIN rail mounting                                 |
| Assembly instructions | See derating curve                                |
| Mounting position     | vertical, horizontal, with front of module upward |

PSR-PC20-1NO-1NC-24DC-SP - Coupling relay




2700578


<https://www.phoenixcontact.com/us/products/2700578>

Drawings

Circuit diagram

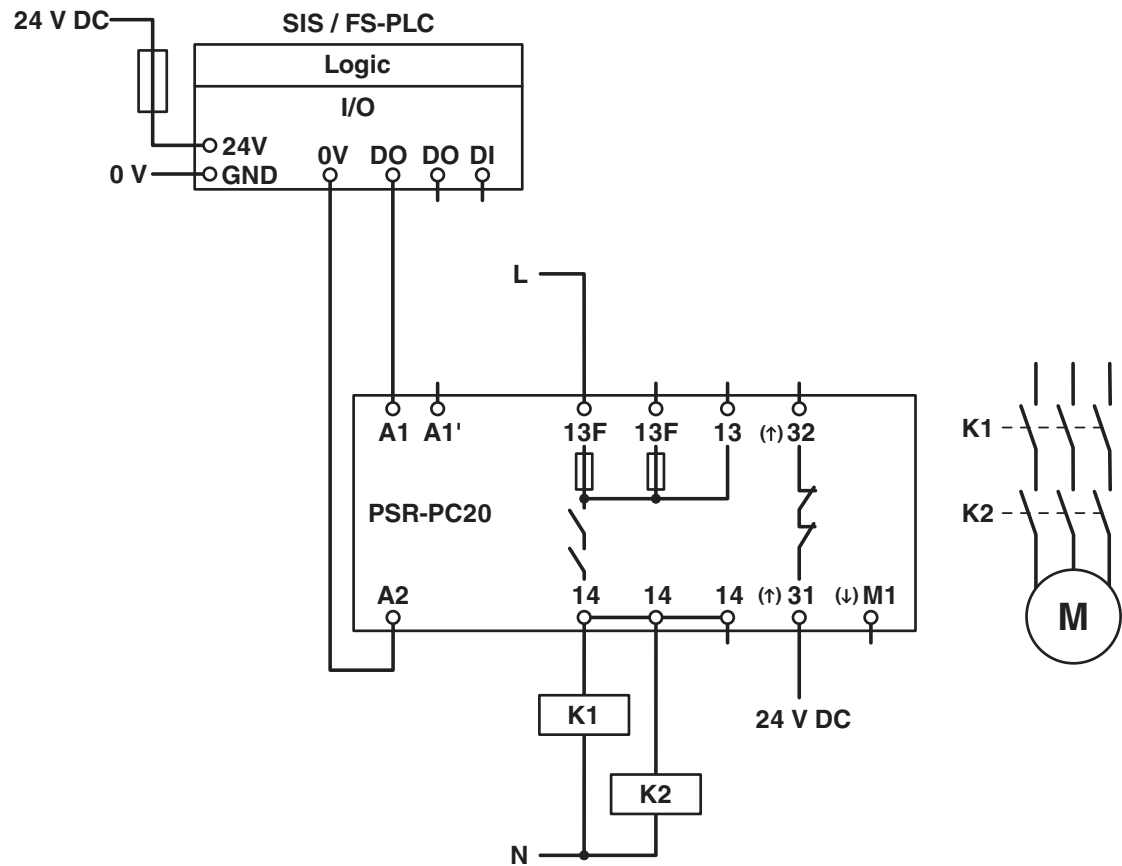

Block diagram

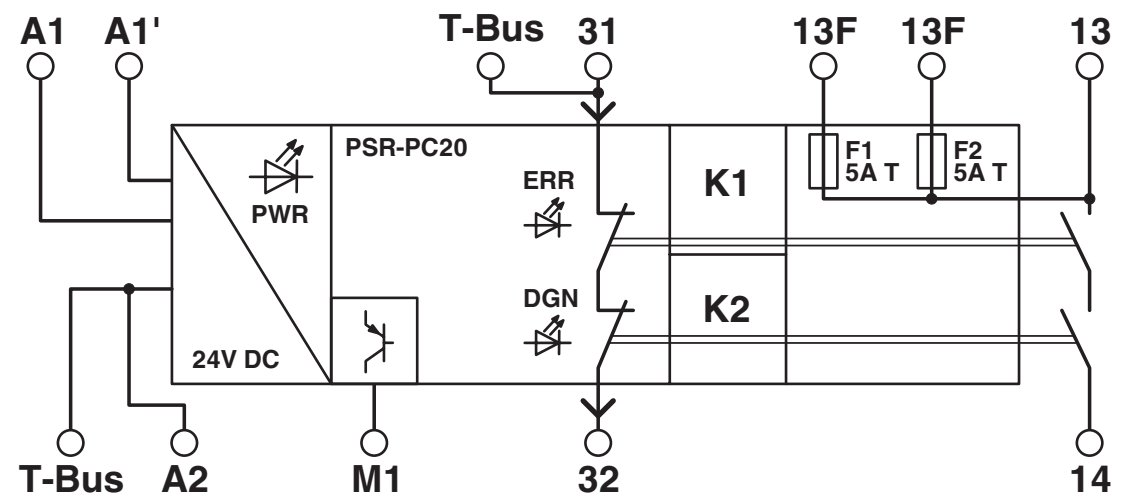

Block diagram

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2700578>



### EAC

Approval ID: RU C-DE.A\*30.B.01082



### DNV GL

Approval ID: TAA00002VZ



### UL Listed

Approval ID: FILE E 140324



### cUL Listed

Approval ID: FILE E 140324



### Functional Safety

Approval ID: 44-780-13755202



### Functional Safety

Approval ID: 44-205-13755204



### IECEx

Approval ID: IECEx ULD 14.0003 X



### cUL Listed

Approval ID: File E 360692



### UL Listed

Approval ID: File E 360692



### ATEX

Approval ID: DEMKO 14 ATEX 1284 X

cULus Listed

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay

2700578

<https://www.phoenixcontact.com/us/products/2700578>



cULus Listed

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27371819 |
| ECLASS-13.0 | 27371819 |
| ECLASS-12.0 | 27371819 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>

## Environmental product compliance

|            |                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                               |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                               |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

# PSR-PC20-1NO-1NC-24DC-SP - Coupling relay



2700578

<https://www.phoenixcontact.com/us/products/2700578>


## Accessories

### ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - DIN rail bus connectors

2869728

<https://www.phoenixcontact.com/us/products/2869728>

DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.



---

### CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)