

NLC-IO-2RTD/UTH-4QTP-01A - I/O extension module



2701671

<https://www.phoenixcontact.com/pc/products/2701671>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



I/O extension module for use with Nanoline base unit. Equipped with 2 temperature inputs and 4 PNP transistor outputs.

Commercial data

Item number	2701671
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DRACAC
Catalog page	Page 467 (C-8-2015)
GTIN	4046356774703
Weight per piece (including packing)	185.1 g
Weight per piece (excluding packing)	185.1 g
Customs tariff number	85389099
Country of origin	IN

Technical data

Product properties

Product type	Extension module
Mounting position	Attaches to DB-9 connector on right-side of base unit

Electrical properties

Supply: Module electronics

Supply voltage	24 V
----------------	------

Input data

Analog

Description of the input	Inputs for thermocouples or linear voltage
Number of inputs	2
Connection method	Individual wires
Connection technology	2 or 3-wire (shielded)
Sensor types (RTD) that can be used	Pt 100, Pt 1000
Sensor types that can be used (TC)	B, E, J, K, N, R, S, T
Protective circuit	Thermal fuse

Output data

Digital

Output description	PNP outputs
Connection method	Screw connection
Number of outputs	4
Protective circuit	Thermal fuse
Maximum output current per channel	0.5 A
Maximum output current per module / terminal block	2 A
Nominal output voltage	24 V DC
Nominal load, inductive	7.2 VA (1.2 H; 80 Ω)
Nominal load, lamp	7.2 W
Nominal load, ohmic	7.2 W (80 Ω)
Maximum operating frequency with ohmic nominal load	100 Hz
Output description	PNP outputs
Connection method	Screw connection
Number of outputs	4
Protective circuit	Thermal fuse
Maximum output current per channel	0.5 A
Maximum output current per module / terminal block	2 A
Nominal output voltage	24 V DC
Nominal load, inductive	7.2 VA (1.2 H; 80 Ω)
Nominal load, lamp	7.2 W

2701671


<https://www.phoenixcontact.com/pc/products/2701671>

Nominal load, ohmic	7.2 W (80 Ω)
Maximum operating frequency with ohmic nominal load	100 Hz

Connection data

Connection method	Screw connection
Conductor cross section, rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	12 ... 24

Dimensions

Dimensional drawing	
Width	40 mm
Height	103.5 mm
Depth	43 mm

Material specifications

Color	white
-------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 60 °C
Degree of protection	IP20
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	0 % ... 90 % (at 25 °C)

Mounting

Mounting type	DIN rail mounting
Mounting position	Attaches to DB-9 connector on right-side of base unit

NLC-IO-2RTD/UTH-4QTP-01A - I/O extension module




2701671

<https://www.phoenixcontact.com/pc/products/2701671>

Drawings

Dimensional drawing

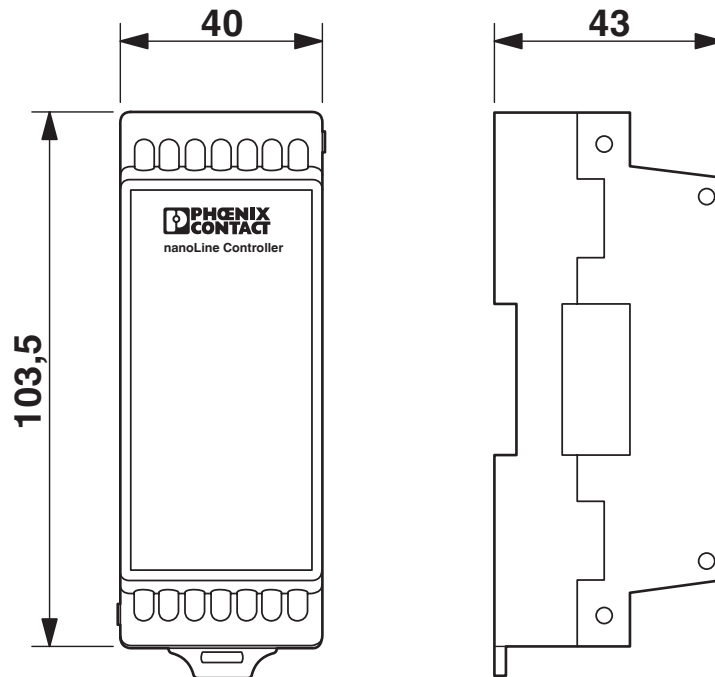

2701671

<https://www.phoenixcontact.com/pc/products/2701671>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2701671>



UL Listed

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705

2701671

<https://www.phoenixcontact.com/pc/products/2701671>

Classifications

ECLASS

ECLASS-11.0	27242216
ECLASS-13.0	27242216
ECLASS-12.0	27242216

ETIM

ETIM 9.0	EC001417
----------	----------

UNSPSC

UNSPSC 21.0	39122300
-------------	----------

2701671

<https://www.phoenixcontact.com/pc/products/2701671>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com