

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline F, Digital I/O module, Digital inputs: 8, 24 V DC, connection technology: 1-conductor, Digital outputs: 8, 24 V DC, 500 mA, connection technology: 1-conductor, transmission speed in the local bus: 100 Mbps, degree of protection: IP20, including bus base module and Axioline F connectors

Product description

The module is designed for use within an Axioline F station. It is used to acquire and output digital signals. You can adjust the filter times of the inputs to increase noise immunity. Filter times of 100 μ s enable you to implement a counter function with a maximum input frequency of 5 kHz in the application. The outputs are protected against short circuit and overload.

Your advantages

- 8 digital inputs in accordance with EN 61131-2 type 1 and type 3
- 24 V DC, 2.4 mA
- Connection of sensors in 1-conductor technology
- Filter times can be adjusted in three increments: < 100 μ s, 1000 μ s or 3000 μ s
- Maximum input frequency: 5 kHz
- 8 digital outputs
- 24 V DC, 500 mA
- Connection of actuators in 1-conductor technology
- Minimum update time of < 100 μ s
- Device rating plate stored

Commercial data

Item number	2701916
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRI233
Product key	DRI233
Catalog page	Page 80 (C-6-2019)
GTIN	4046356872935
Weight per piece (including packing)	183.733 g
Weight per piece (excluding packing)	133 g
Customs tariff number	85389091
Country of origin	DE

AXL F DI8/1 DO8/1 1H - Digital module




2701916

<https://www.phoenixcontact.com/au/products/2701916>

Technical data

Dimensions

Dimensional drawing	
Width	35 mm
Height	126.1 mm
Depth	54 mm
Note on dimensions	The depth applies when a TH 35-7.5 DIN rail is used (in accordance with EN 60715).

Notes

Utilization restriction	
EMC note	EMC: class A product, see manufacturer's declaration in the download area

Interfaces

Axioline F local bus	
Number of interfaces	2
Connection method	Bus base module
Transmission speed	100 Mbps

System properties

Module	
ID code (hex)	none
Input address area	1 Byte
Output address area	1 Byte
Required parameter data	3 Byte
Required configuration data	7 Byte

Input data

Digital	
Input name	Digital inputs
Description of the input	EN 61131-2 types 1 and 3
Number of inputs	8
Connection method	Push-in connection
Connection technology	1-conductor

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Nominal input voltage U_{IN}	24 V DC
Nominal input current at U_{IN}	2.4 mA
Input filter time	3000 μ s (Default)
	1000 μ s
	< 100 μ s
Protective circuit	Polarity reversal protection of the inputs; parallel diode (30 V, 5 s)

Output data

Digital

Output name	Digital outputs
Connection method	Push-in connection
Connection technology	1-conductor
Number of outputs	8
Protective circuit	Short-circuit protection, overload protection of the outputs; electronic
Output voltage	24 V DC
Limitation of the voltage induced on circuit interruption	-25.8 V ... -15 V
Maximum output current per module	4 A (provide external protection)
Nominal output voltage	24 V DC
Load min.	10 k Ω
Output voltage when switched off	max. 1 V
Output current when switched off	max. 300 μ A
Nominal load, inductive	max. 12 VA (1.2 H, 48 Ω , with nominal voltage)
Nominal load, lamp	max. 12 W (at nominal voltage)
Nominal load, ohmic	max. 12 W (48 Ω , with nominal voltage)
Switching frequency	max. 10000 per second (with at least 50 mA load current)
	max. 1 per second (with inductive load)
	max. 16 per second (with nominal lamp load)
Reverse voltage resistance to short pulses	limited protection up to 0.5 A for 1 s
Behavior with overload	Shutdown with automatic restart
Behavior with inductive overload	Output can be destroyed
Signal delay	max. 100 μ s (when switched on)
	max. 100 μ s (when switched off, with at least 50 mA load current)
Overcurrent shut-down	as of 0.7 A
Output current with ground connection interrupt when switched off	< 1 mA

Product properties

Type	block modular
Product type	I/O component
Product family	Axioline F
Mounting position	any (no temperature derating)

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

Scope of delivery	including bus base module and Axioline F connectors
Insulation characteristics	
Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

Electrical properties

Potentials: Axioline F local bus supply (U_{BUS})

Supply voltage	5 V DC (via bus base module)
Current draw	max. 120 mA (up to HW 01)
	max. 60 mA (from HW 02)
Power consumption	max. 600 mW (up to HW 01)
	max. 300 mW (from HW 02)

Potentials: Supply for digital input and output modules (U_{IO})

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 4 A (provide external protection)
Power consumption	max. 96 W (of which 1.35 W internal losses)
Protective circuit	Surge protection; electronic (35 V, 0.5 s)
	Reverse polarity protection; parallel diode; with external 5 A fuse (only for commissioning)

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply of the local bus (U_{BUS}) / 24 V supply (I/Os)	500 V AC, 50 Hz, 1 min.
Test voltage: 5 V supply of the local bus (U_{BUS}) / functional ground	500 V AC, 50 Hz, 1 min.
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min.

Connection data

Connection technology

Connection name	Axioline F connector
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.

Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Axioline F connector

Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

Conductor cross section, rigid	0.2 mm² ... 1.5 mm²
Conductor cross section, flexible	0.2 mm² ... 1.5 mm²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any (no temperature derating)


AXL F DI8/1 DO8/1 1H - Digital module

2701916

<https://www.phoenixcontact.com/au/products/2701916>


Drawings

Connection diagram

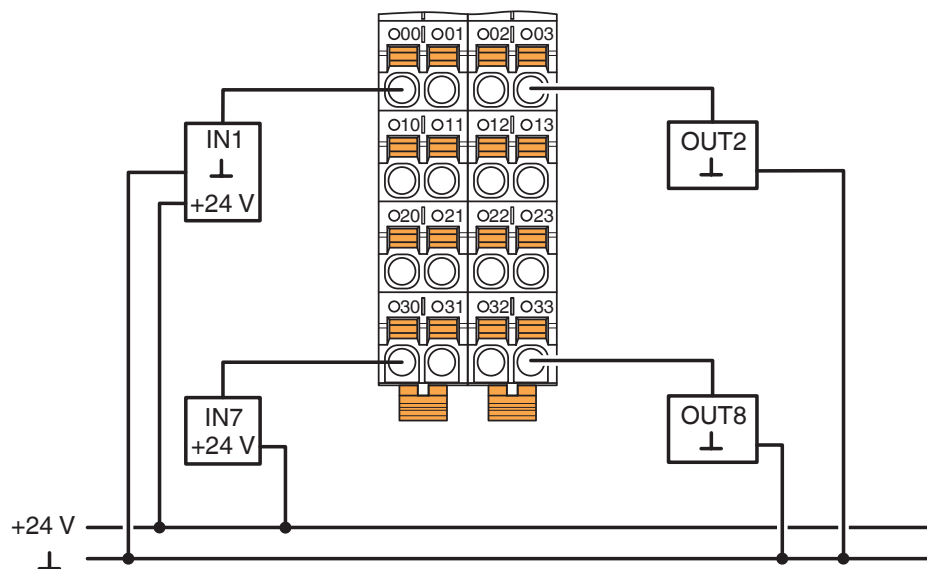

Typical connection of sensors and actuators when using external busbars

Diagram

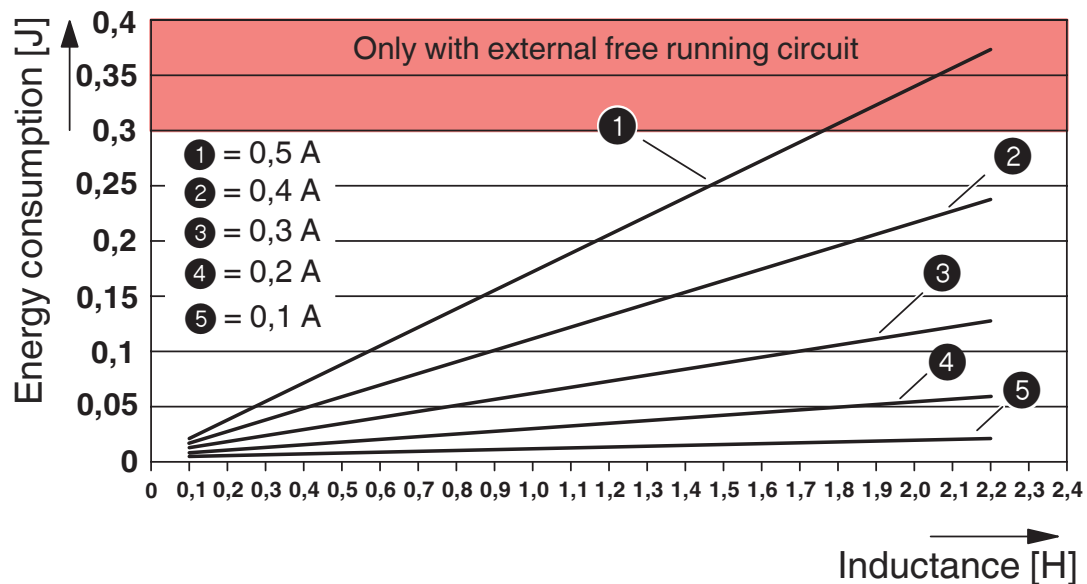

Maximum outputs power consumption when inductive loads are switched off


AXL F DI8/1 DO8/1 1H - Digital module



2701916


<https://www.phoenixcontact.com/au/products/2701916>

Dimensional drawing

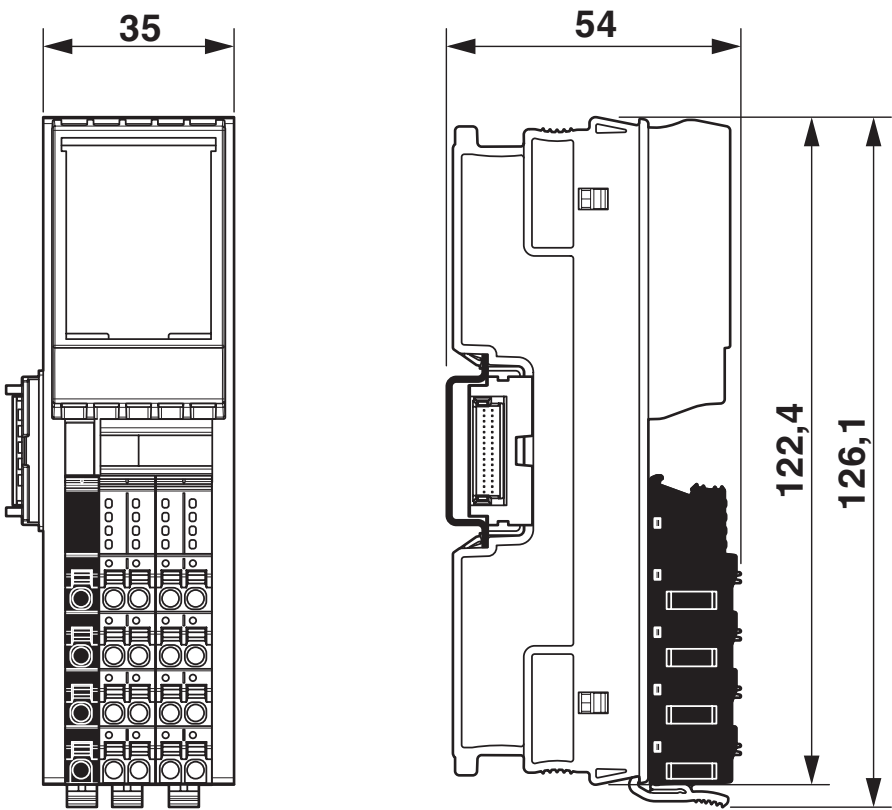

Dimensions

Connection diagram

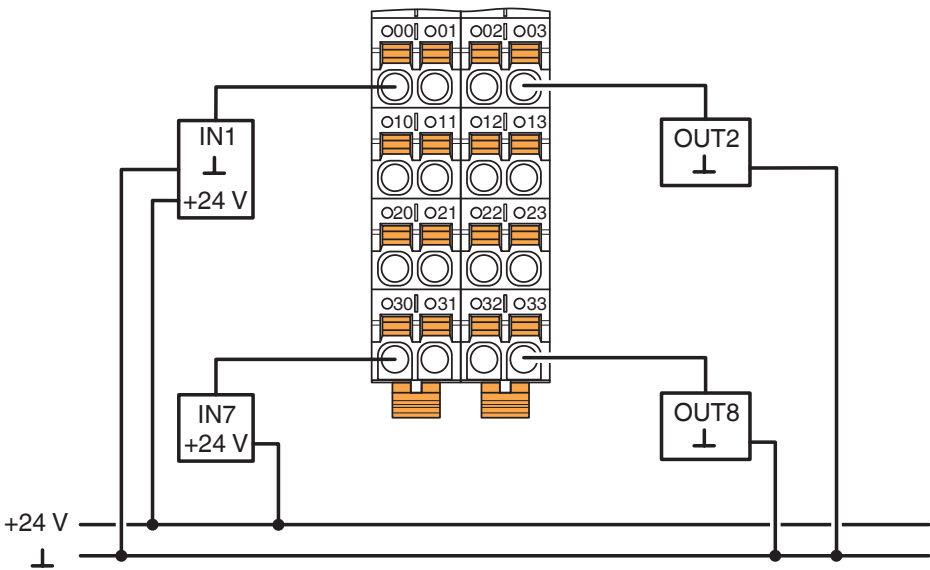

Connection in 1-conductor technology


AXL F DI8/1 DO8/1 1H - Digital module

2701916

<https://www.phoenixcontact.com/au/products/2701916>



Block diagram

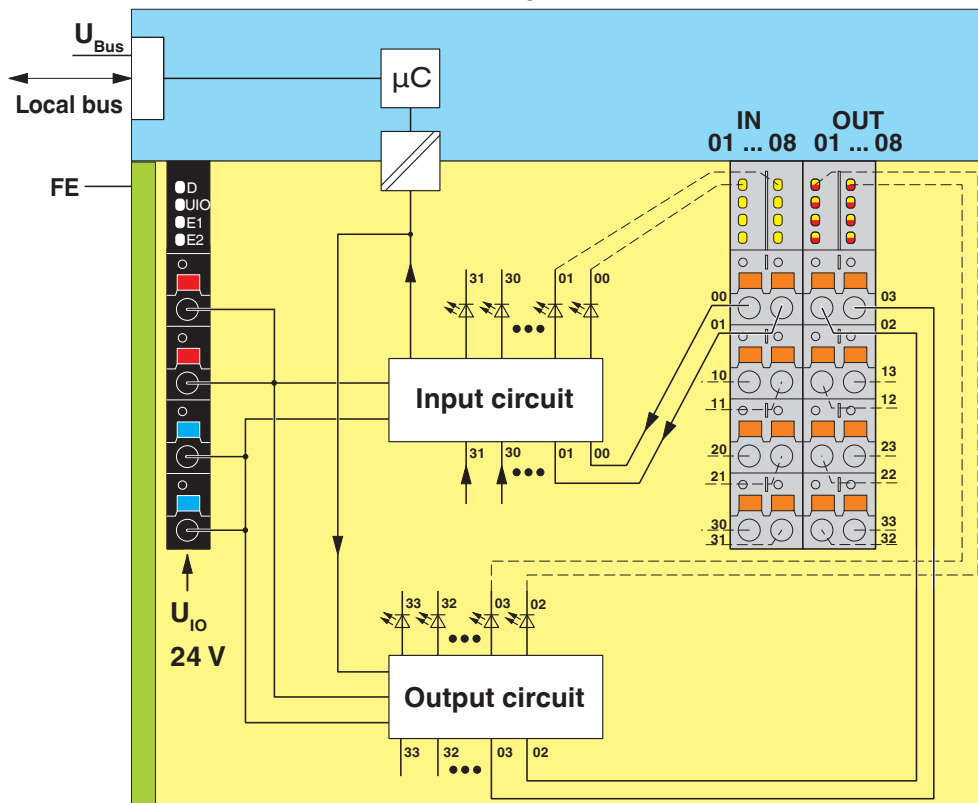

Internal wiring of the terminal points

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2701916>



DNV GL

Approval ID: TAA00000DF



LR

Approval ID: LR2001902TA-08



BV

Approval ID: 36433/B4 BV



PRS

Approval ID: TE/1020/880590/21

BSH

Approval ID: 840



RINA

Approval ID: ELE008423XG

ABS

Approval ID: 20-2059154-PDA



cULus Listed

Approval ID: E238705



EAC

Approval ID: TR_TS_D_01831-19



EAC

Approval ID: TR_TS_D_01831-19

ABS

Approval ID: 20-2059154-PDA

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

BSH

Approval ID: 840



BV

Approval ID: 36433/B4 BV



DNV GL

Approval ID: TAA00000DF



PRS

Approval ID: TE/1020/880590/21



RINA

Approval ID: ELE008423XG



LR

Approval ID: LR2001902TA-08



cULus Listed

Approval ID: E238705

UAE-RoHS

Approval ID: 23-02-63243

UAE-RoHS

Approval ID: 23-02-63243

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 9.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

AXL F DI8/1 DO8/1 1H - Digital module



2701916

<https://www.phoenixcontact.com/au/products/2701916>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au