

RAD-RS485-IFS - Communication module



2702184

<https://www.phoenixcontact.com/it/products/2702184>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Radioline - RS-485 multipoint multiplexer, can be extended with I/O modules, can be used as Modbus/RTU bus coupler or can be combined with Radioline wireless system, up to 99 stations, range of up to 1.2 km on in-house copper cables

Product description

The popular, straightforward method of distributing I/O information using white thumbwheels on the front of the equipment is now also available for RS-485 networks. Addressing the RS-485 front module is quick and easy too – all it takes is a turn of the yellow thumbwheel. This enhances the Radioline system's flexibility, allowing it to be used for solutions in even more applications. To increase the range, it is of course possible to replace the RS-485 line with alternative transmission media. Phoenix Contact offers a range of converters for fiber-optic cables, SHDSL, wireless or Ethernet technology.

Your advantages

- Multipoint multiplexer for I/O signals
- Up to 99 bus stations in the network
- Quick and easy startup without programming
- Can be combined with Radioline wireless modules
- Modular extension with up to 32 I/O extension modules supported
- Extended temperature range of -40 °C ... +70 °C
- Approved for use in zone 2

Commercial data

Item number	2702184
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNC
Product key	DNC61G
Catalog page	Page 379 (C-6-2019)
GTIN	4055626007373
Weight per piece (including packing)	170.4 g
Weight per piece (excluding packing)	110 g
Customs tariff number	85176200
Country of origin	DE

RAD-RS485-IFS - Communication module



2702184


<https://www.phoenixcontact.com/it/products/2702184>

Set consists of

ME 17,5 TBUS 1,5/ 5-ST-3,81 KMGY - DIN rail bus connectors

2713645

<https://www.phoenixcontact.com/it/products/2713645>



DIN rail connector, color: light grey, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts

Technical data

Notes

Utilization restriction

CCCex note	Use in potentially explosive areas is not permitted in China.
------------	---

Product properties

Product type	Communication module
Application	RS-485
Operating mode	I/O data (Default setting, configuration via thumbwheel) Modbus/RTU server (Default setting, configuration via thumbwheel)
MTTF	1233 Years (SN 29500 standard, temperature 25°C, operating cycle 21%) 514 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%) 212 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Electrical properties

Rated insulation voltage	60 V (In accordance with EN/IEC 60079-7)
Maximum power dissipation for nominal condition	1.56 W
Transient surge protection	Yes

System limits

Number of supported devices	≤ 99 (Addressing via thumbwheel)
Number of possible extension modules	≤ 32 (Per module)

Supply

Supply voltage range	19.2 V DC ... 30.5 V DC
Max. current consumption	≤ 65 mA (at 24 V DC, at 25 °C, stand-alone) ≤ 6 A (at 24 V DC, with DIN rail connector at full capacity)

Output data

Digital

Output name	Link relay output
Number of outputs	1
Contact switching type	Changeover contact
Contact material	PdRu, gold-plated
Maximum switching voltage	30 V AC/DC 60 V DC

RAD-RS485-IFS - Communication module



2702184

<https://www.phoenixcontact.com/it/products/2702184>

Max. switching current	500 mA (30 V AC/DC)
	300 mA (60 V DC)
Electrical service life	5x 10 ⁵ switching cycles with 0.5 A at 30 V DC

Connection data

Tightening torque	0.5 Nm ... 0.6 Nm
	5 lb _f -in. ... 7 lb _f -in.
Connection method	Screw connection
Stripping length	7 mm
Conductor cross section, rigid min.	0.2 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14

Interfaces

Serial: RS-485

Data rate	300 bps / 600 bps / 1.2 kbps / 2.4 kbps / 4.8 kbps / 9.6 kbps / 19.2 kbps / 38.4 kbps / 57.6 kbps / 93.75 kbps / 115.2 kbps (Default setting: 19.2/8/E/1)
Connection method	COMBICON plug-in screw terminal block
Connection technology	2-conductor
Transmission length	≤ 1200 m
Termination resistor	390 Ω (switchable via DIP switches)
	150 Ω (switchable via DIP switches)
	390 Ω (switchable via DIP switches)

Serial: Configuration interface

Connection method	S-PORT (socket)
-------------------	-----------------

Signaling

Status display	Green LED (supply voltage, PWR)
	Green LED (bus communication, DAT)
	Red LED (periphery error, ERR)
	Green LED (receive data, RX)
	Green LED (transmit data, TX)

Dimensions


RAD-RS485-IFS - Communication module



2702184

<https://www.phoenixcontact.com/it/products/2702184>

Dimensional drawing



Width	17.5 mm
Height	113 mm
Depth	114.5 mm

Material specifications

Color (Housing)	gray (RAL 7042)
Material Housing	PA 6.6-FR
Flammability rating according to UL 94	V0

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C (>55°C derating, see technical documentation) -40 °F ... 158 °F (>131°F derating, see technical documentation)
Ambient temperature (storage/transport)	-40 °C ... 85 °C -40 °F ... 185 °F
Altitude	2000 m
Permissible humidity (operation)	20 % ... 85 %
Permissible humidity (storage/transport)	20 % ... 85 %
Shock	16g, 11 ms
Vibration (operation)	in accordance with IEC 60068-2-6: 5g, 10 Hz ... 150 Hz

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UKCA

Certificate	UKCA-compliant
-------------	----------------

ATEX

Identification	Ex II 3 G Ex ec nC IIC T4 Gc
Certificate	IBExU 15 ATEX B008 X
Note	Please follow the special installation instructions in the documentation!

IECEX

Identification	Ex ec nC IIC T4 Gc
----------------	--------------------

RAD-RS485-IFS - Communication module



2702184

<https://www.phoenixcontact.com/it/products/2702184>

Certificate	IECEx IBE 13.0019X
-------------	--------------------

EAC Ex

Identification	2Ex nA nC IIC T4 Gc X
Certificate	RU C-DE.HB49.B.00033/20

UL, USA/Canada

Identification	508 Listed
	Class I, Div. 2, Groups A, B, C, D T4A
	Class I, Zone 2, IIC T4

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

Mounting

Mounting type	DIN rail: 35 mm
Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715

RAD-RS485-IFS - Communication module


2702184

<https://www.phoenixcontact.com/it/products/2702184>



Drawings

Functional drawing

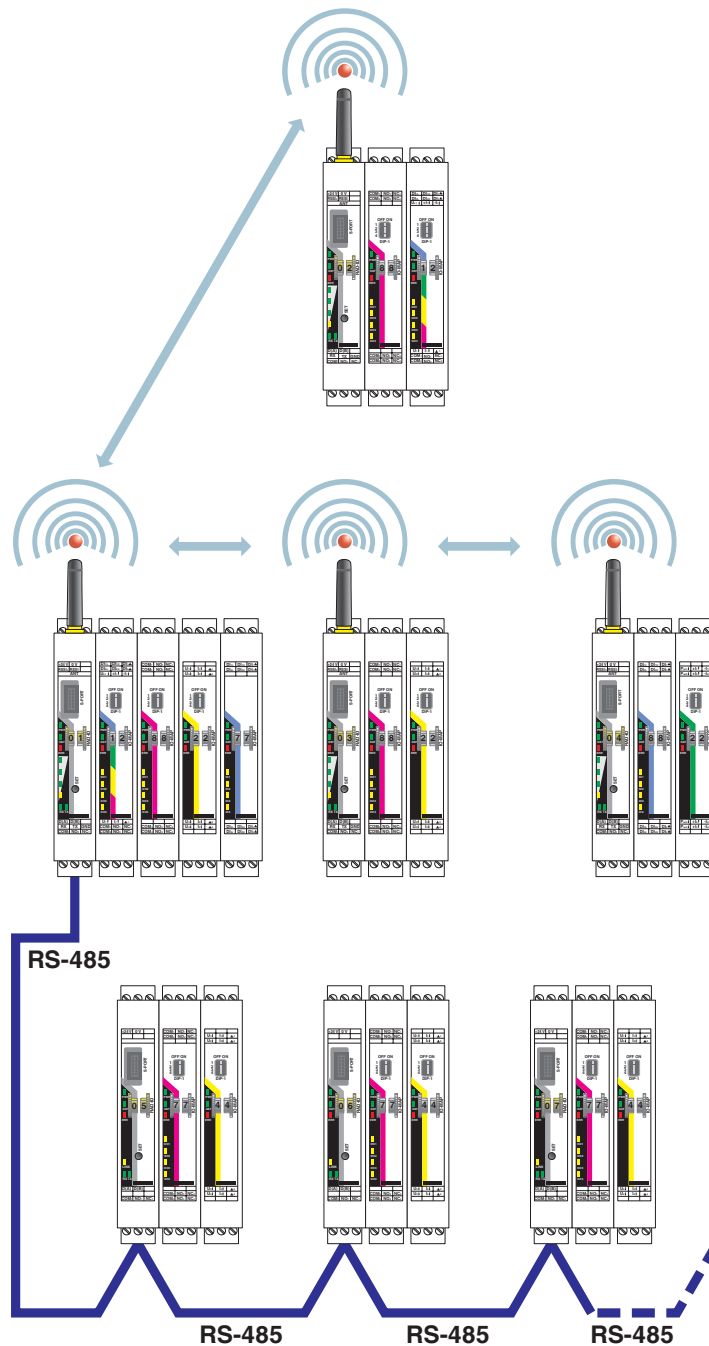

I/O-to-I/O, wireless, and RS-485


RAD-RS485-IFS - Communication module

2702184

<https://www.phoenixcontact.com/it/products/2702184>



Dimensional drawing

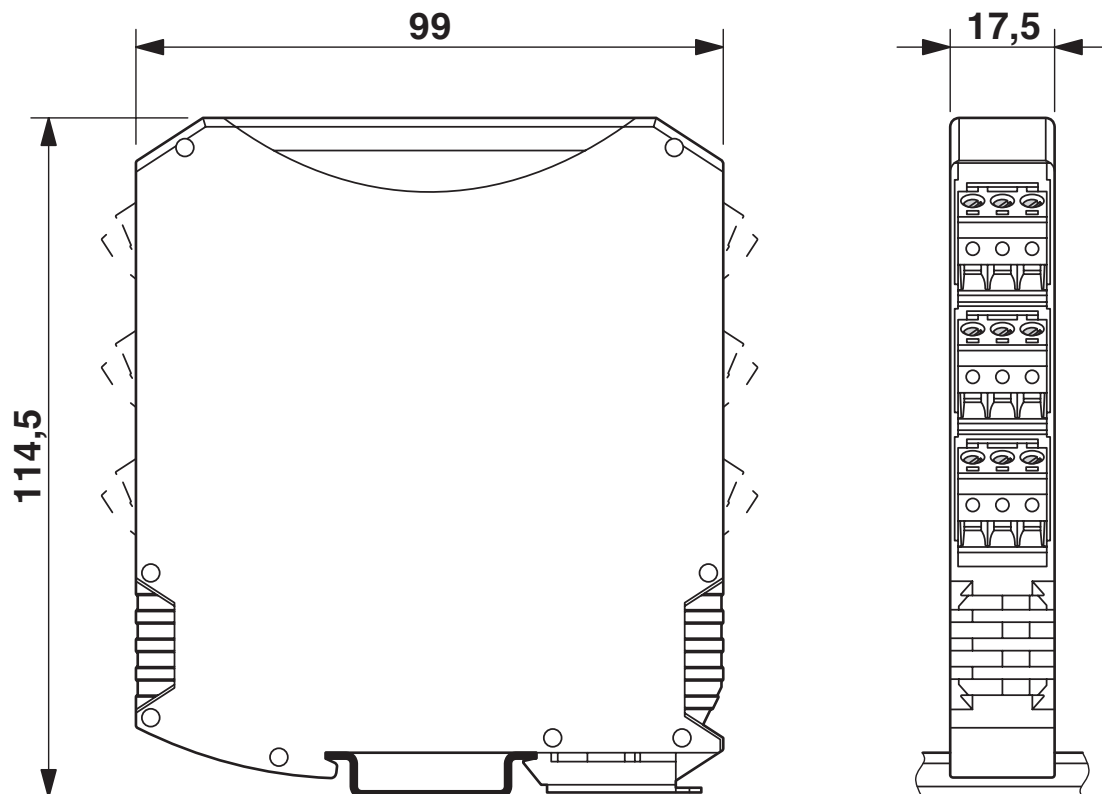

Slim design


RAD-RS485-IFS - Communication module

2702184

<https://www.phoenixcontact.com/it/products/2702184>




Functional drawing

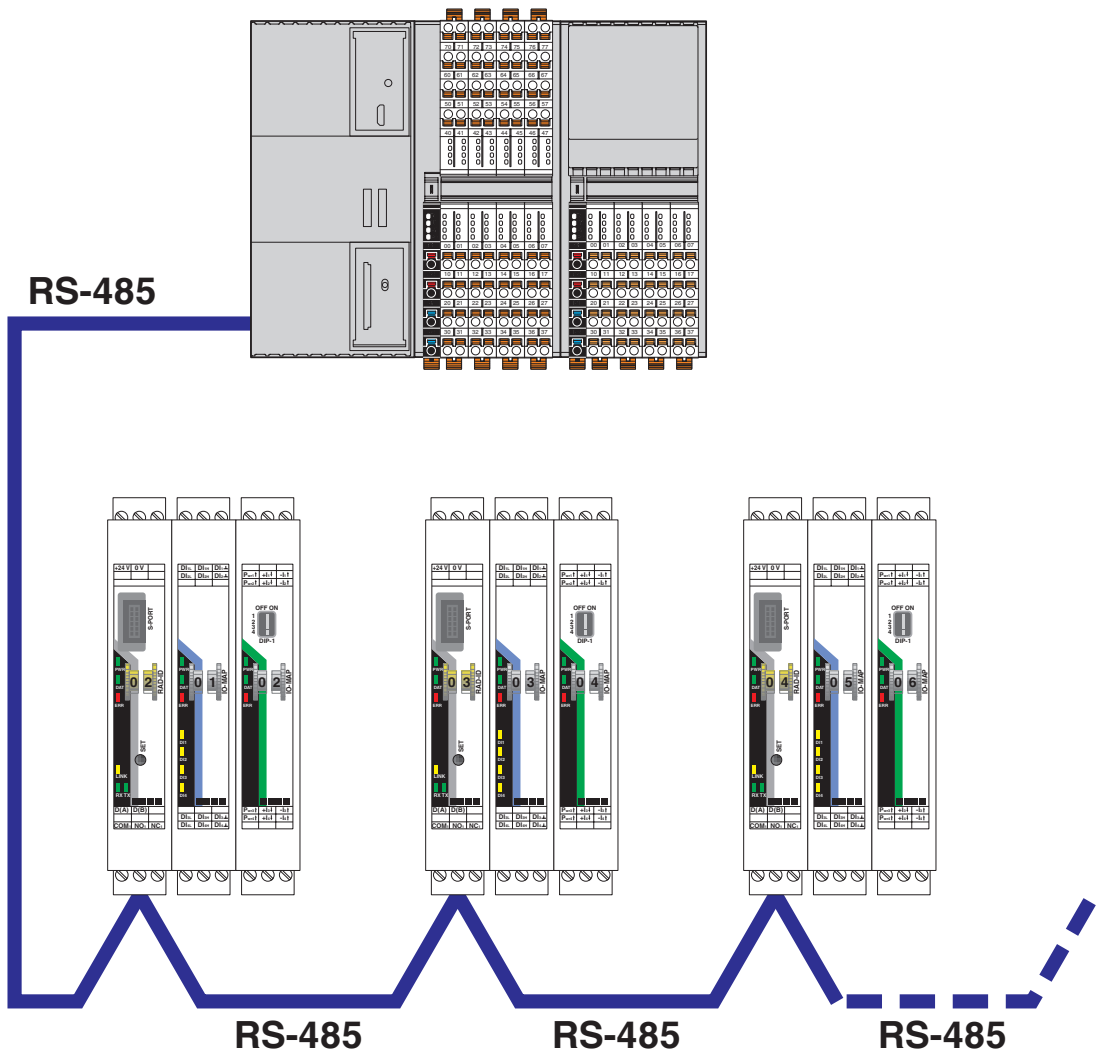

Modbus/RTU server

Circuit diagram

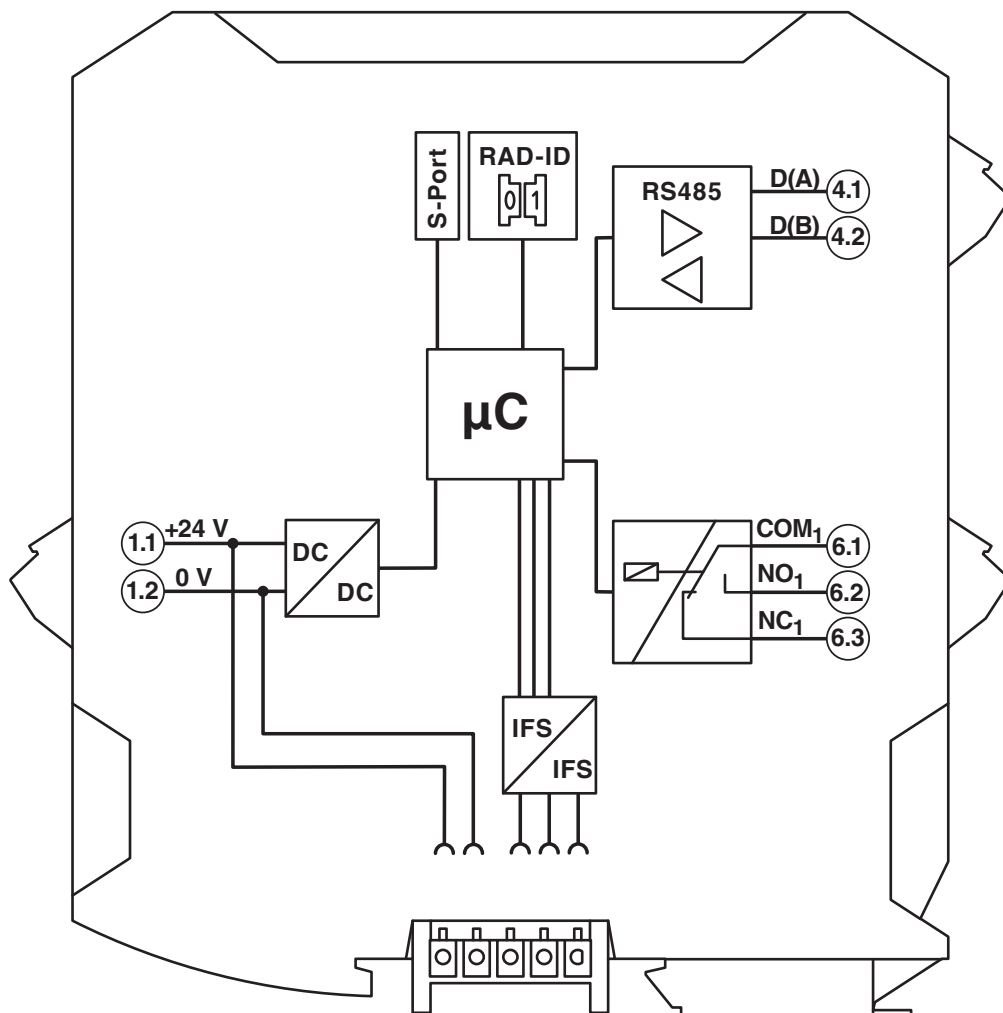


RAD-RS485-IFS - Communication module

2702184

<https://www.phoenixcontact.com/it/products/2702184>

Schematic diagram

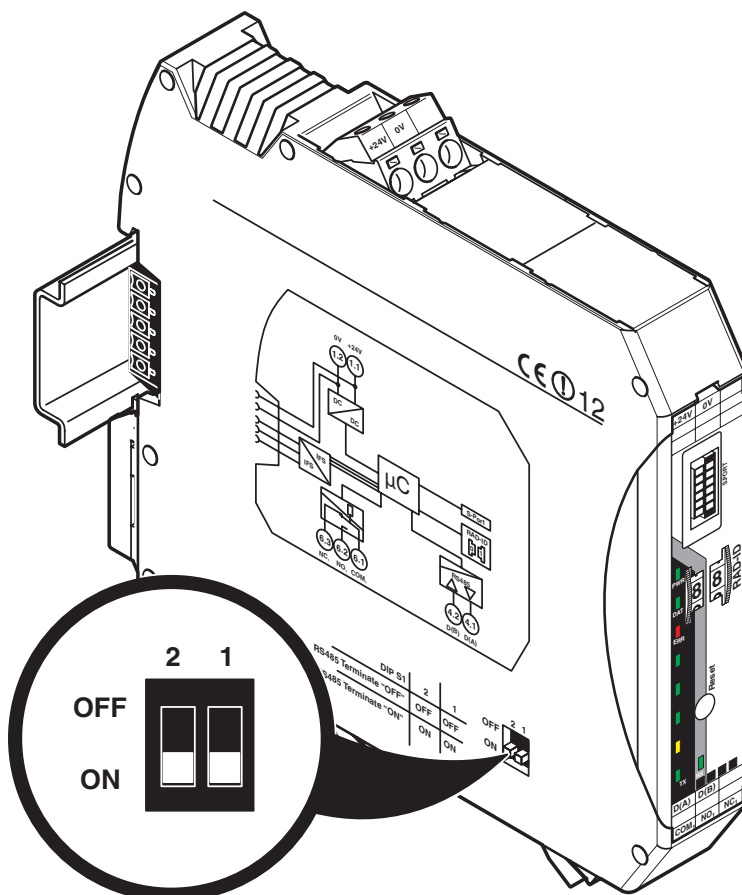


DIP switches

RAD-RS485-IFS - Communication module




2702184
<https://www.phoenixcontact.com/it/products/2702184>

Functional drawing

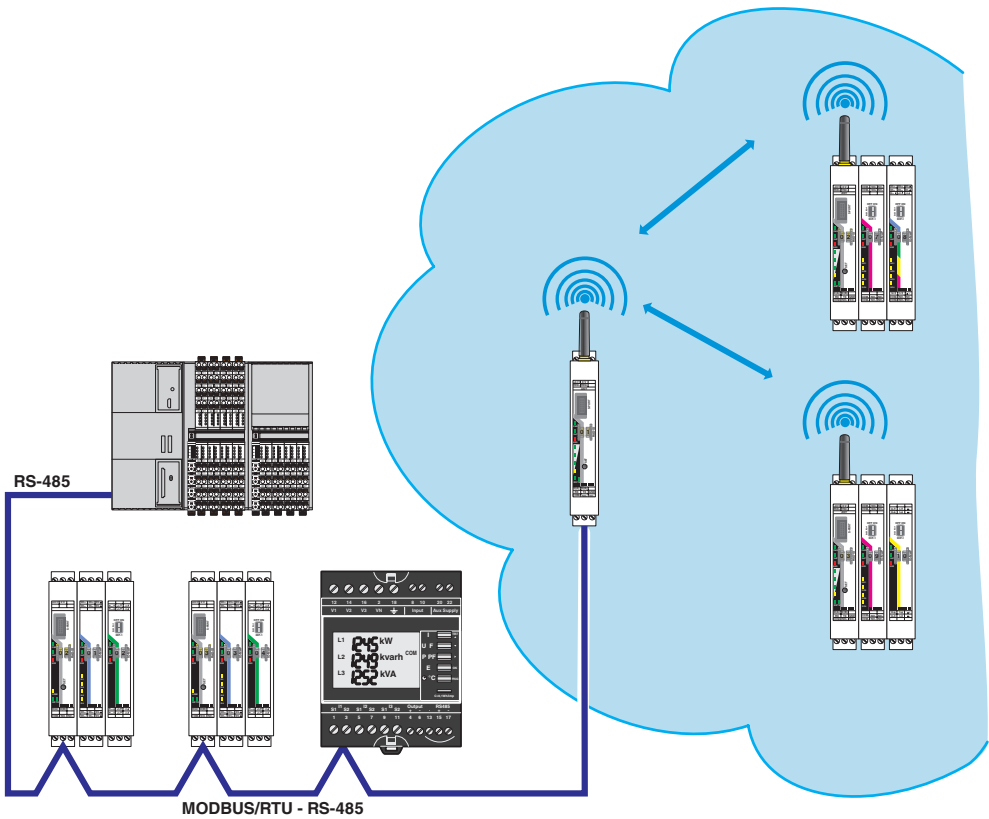

Radioline wireless system and RS-485 stations on a Modbus client (I/O-to-serial)

Schematic diagram

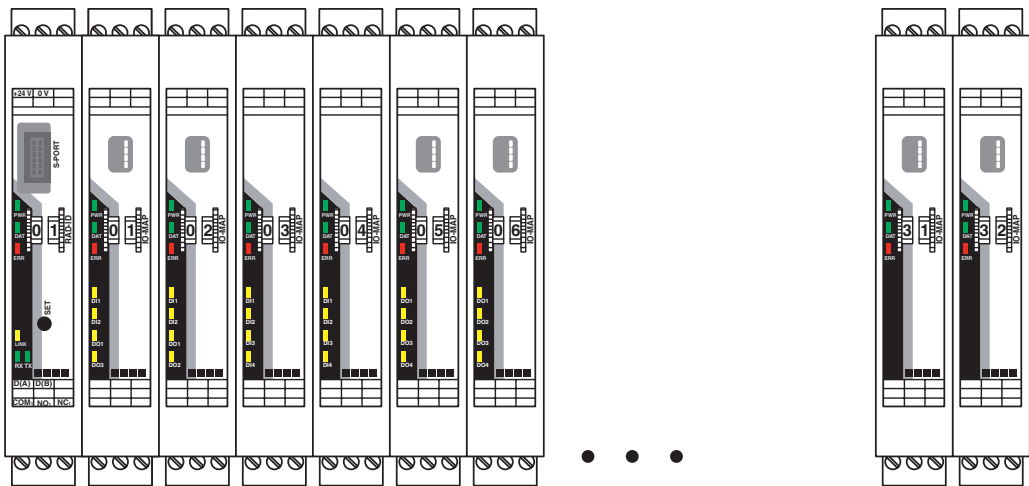

Radioline joining station with up to 32 I/O extension modules


RAD-RS485-IFS - Communication module

2702184

<https://www.phoenixcontact.com/it/products/2702184>



Functional drawing

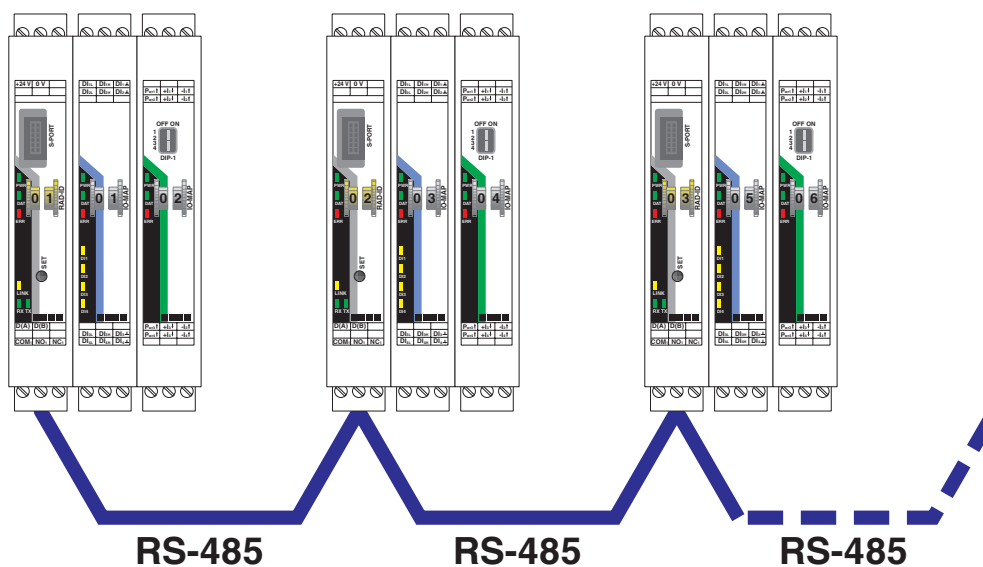

I/O-to-I/O, only RS-485


RAD-RS485-IFS - Communication module

2702184

<https://www.phoenixcontact.com/it/products/2702184>



Schematic diagram

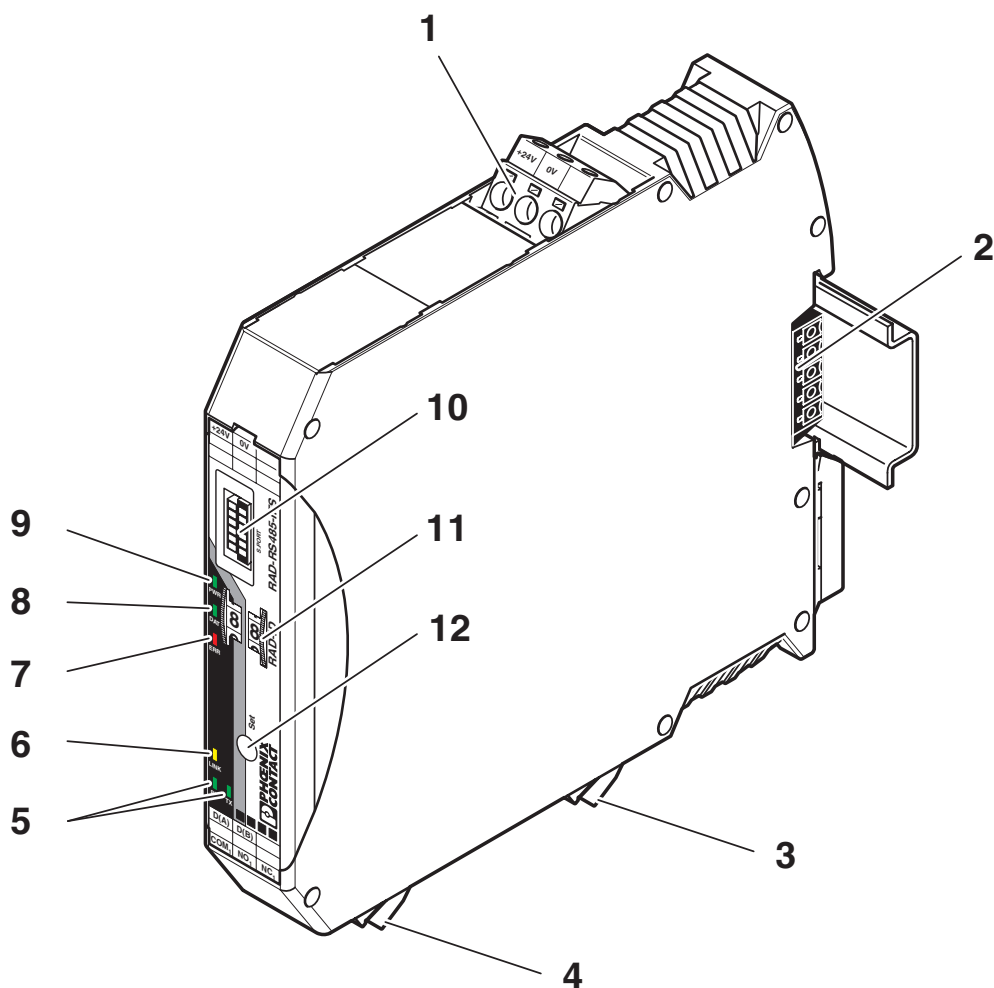


Function elements

RAD-RS485-IFS - Communication module

2702184

<https://www.phoenixcontact.com/it/products/2702184>

Schematic diagram

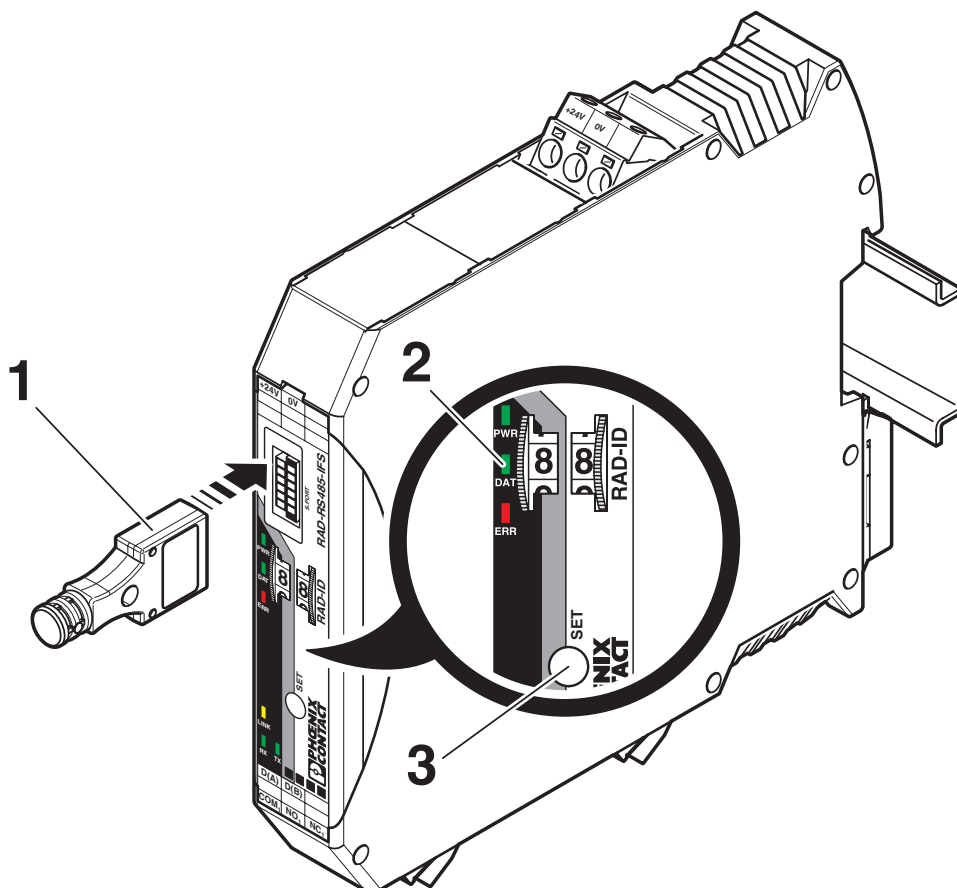

Configuration with memory stick

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/2702184>

**UL Listed**
Approval ID: FILE E 238705

**cUL Listed**
Approval ID: FILE E 238705

**EAC Ex**
Approval ID: RU*HB49.B00033/20

**IECEx**
Approval ID: IECEx IBE 13.0019X

**cUL Listed**
Approval ID: FILE E 196811

**UL Listed**
Approval ID: FILE E 196811

**ATEX**
Approval ID: IBExU 15 ATEX B008 X

**ATEX**
Approval ID: IBExU15ATEXB008 X

cULus Listed

cULus Listed

Classifications

ECLASS

ECLASS-11.0	19170501
ECLASS-12.0	19170501
ECLASS-13.0	19170501

ETIM

ETIM 8.0	EC000816
----------	----------

UNSPSC

UNSPSC 21.0	43222600
-------------	----------

RAD-RS485-IFS - Communication module



2702184
<https://www.phoenixcontact.com/lt/products/2702184>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com