

2702773

<https://www.phoenixcontact.com/pc/products/2702773>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The GW EIP/ASCII... converts RAW or ASCII serial strings into EtherNet/IP. Includes one RJ45 port and two D-SUB 9 ports.

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2702773             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product key                          | DNC323              |
| Catalog page                         | Page 355 (C-6-2019) |
| GTIN                                 | 4055626339412       |
| Weight per piece (including packing) | 180 g               |
| Weight per piece (excluding packing) | 125 g               |
| Customs tariff number                | 85176200            |
| Country of origin                    | US                  |

# GW EIP/ASCII 1E/2DB9 - Interface converters



2702773

<https://www.phoenixcontact.com/pc/products/2702773>

## Technical data

### Notes

#### Utilization restriction

|          |                                                                           |
|----------|---------------------------------------------------------------------------|
| EMC note | EMC: class A product, see manufacturer's declaration in the download area |
|----------|---------------------------------------------------------------------------|

#### Utilization restriction

|            |                                                               |
|------------|---------------------------------------------------------------|
| CCCEX note | Use in potentially explosive areas is not permitted in China. |
|------------|---------------------------------------------------------------|

### Product properties

|              |                                                                                           |
|--------------|-------------------------------------------------------------------------------------------|
| Product type | Interface converter                                                                       |
| MTBF         | 69.4 Years (Telcordia standard, 25°C temperature, 50% stress, Environmental Factor = 1.0) |
|              | 46.3 Years (Telcordia standard, 40°C temperature, 50% stress, environmental factor = 1.0) |

### Electrical properties

|                                            |                                       |
|--------------------------------------------|---------------------------------------|
| Electrical isolation                       | IEC UL 61010-1 (VCC // Ethernet)      |
| Test voltage data interface/data interface | 1.5 kV <sub>rms</sub> (50 Hz, 1 min.) |
| Test voltage data interface/power supply   | 1.5 kV <sub>rms</sub> (50 Hz, 1 min.) |
|                                            | 1.5 kV <sub>rms</sub>                 |

#### Supply

|                             |                                                                     |
|-----------------------------|---------------------------------------------------------------------|
| Supply voltage range        | 10.8 V DC ... 30 V DC (via pluggable COMBICON screw terminal block) |
| Typical current consumption | 76 mA (24 V DC)                                                     |
| Max. current consumption    | 85 mA (24 V DC)                                                     |

#### Function

|                                  |                                               |
|----------------------------------|-----------------------------------------------|
| Management                       | Web-based management                          |
| Status and diagnostic indicators | LEDs: Status, ACT/LNK (Ethernet data traffic) |

### Connection data

#### Supply

|                                   |                                               |
|-----------------------------------|-----------------------------------------------|
| Conductor cross section, flexible | 0.20 mm <sup>2</sup> ... 2.50 mm <sup>2</sup> |
| Conductor cross section AWG       | 24 ... 12                                     |
| Tightening torque                 | 0.5 Nm ... 0.6 Nm                             |

### Interfaces

|            |              |
|------------|--------------|
| Signal     | Ethernet     |
|            | EtherNet/IP™ |
| Web server | yes          |

#### Data: EtherNet/IP™

|                           |                               |
|---------------------------|-------------------------------|
| Serial transmission speed | 10/100 Mbps, auto negotiation |
|---------------------------|-------------------------------|

# GW EIP/ASCII 1E/2DB9 - Interface converters



2702773

<https://www.phoenixcontact.com/pc/products/2702773>

|                     |                                 |
|---------------------|---------------------------------|
| Connection method   | RJ45 jack, shielded             |
| No. of channels     | 1                               |
| Transmission length | ≤ 100 m (shielded twisted pair) |
| Protocols supported | EtherNet/IP, ASCII              |
| Auxiliary protocols | ARP, DHCP (Client), PING        |

## Data: RS-232

|                             |                                                                   |
|-----------------------------|-------------------------------------------------------------------|
| Serial transmission speed   | 0.3; 0.6; 1.2; 2.4; 4.8; 9.6; 19.2; 38.4; 57.6; 115.2; 230.4 Kbps |
| Number of connections       | 2                                                                 |
| Connection method           | D-SUB 9 plug                                                      |
| Pin assignment              | DTE                                                               |
| Transmission length         | 15 m                                                              |
| File format/coding          | 5/6/7/8 Data bits, 1/2 Stop bits, None/Even/Odd/Mark/Space Parity |
| Data flow control/protocols | Software handshake, Xon/Xoff or hardware handshake RTS/CTS        |

## Data: RS-422

|                           |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| Serial transmission speed | 0.3; 0.6; 1.2; 2.4; 4.8; 9.6; 19.2; 38.4; 57.6; 115.2; 230.4 Kbps |
| Number of connections     | 2                                                                 |
| Connection method         | D-SUB 9 plug                                                      |
| Pin assignment            | 2, 3, 5, 7, 8                                                     |
| Transmission length       | ≤ 1200 m                                                          |
| Termination resistor      | 120 Ω (configurable)                                              |
| File format/coding        | 5/6/7/8 Data bits, 1/2 Stop bits, None/Even/Odd/Mark/Space Parity |

## Data: RS-485

|                           |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| Serial transmission speed | 0.3; 0.6; 1.2; 2.4; 4.8; 9.6; 19.2; 38.4; 57.6; 115.2; 230.4 Kbps |
| Number of connections     | 2                                                                 |
| Connection method         | D-SUB 9 plug                                                      |
| Pin assignment            | 3, 5, 7                                                           |
| Termination resistor      | 120 Ω (configurable)                                              |
| File format/coding        | 5/6/7/8 Data bits, 1/2 Stop bits, None/Even/Odd/Mark/Space Parity |

## Dimensions

|        |         |
|--------|---------|
| Width  | 22.5 mm |
| Height | 99 mm   |
| Depth  | 115 mm  |

## Material specifications

|                  |        |
|------------------|--------|
| Color            | gray   |
| Housing material | PA 6.6 |

## Environmental and real-life conditions

### Ambient conditions

# GW EIP/ASCII 1E/2DB9 - Interface converters



2702773

<https://www.phoenixcontact.com/pc/products/2702773>

|                                          |                                |
|------------------------------------------|--------------------------------|
| Degree of protection                     | IP20                           |
| Ambient temperature (operation)          | -40 °C ... 70 °C               |
| Ambient temperature (storage/transport)  | -40 °C ... 80 °C               |
| Altitude                                 | < 2000 m                       |
| Permissible humidity (operation)         | 10 % ... 95 % (non-condensing) |
| Permissible humidity (storage/transport) | 5 % ... 95 % (non-condensing)  |

## Approvals

### Conformity/Approvals

|                  |                                        |
|------------------|----------------------------------------|
| Conformance      | CE-compliant                           |
| UL, USA          | UL 61010-1                             |
| UL, USA / Canada | Class I, Div. 2, Groups A, B, C, D T4A |
| Noxious gas test | ISA-S71.04-1985 G3 Harsh Group A       |

### Ex data

|       |                                               |
|-------|-----------------------------------------------|
| ATEX  | DEMKO 18ATEX 2026X: II 3 G<br>Ex ec IIC T4 Gc |
| IECEx | IECEx UL 18.0023X<br>Ex ec IIC T4 Gc          |

## EMC data

|                               |                                           |
|-------------------------------|-------------------------------------------|
| Noise immunity                | EN 61000-6-2:2005                         |
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Noise emission                | EN 61000-6-4                              |

## Standards and regulations


|                       |                    |
|-----------------------|--------------------|
| Standards/regulations | EN 55022, EN 55024 |
|-----------------------|--------------------|

## Mounting

|               |                   |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|

## Drawings

Block diagram

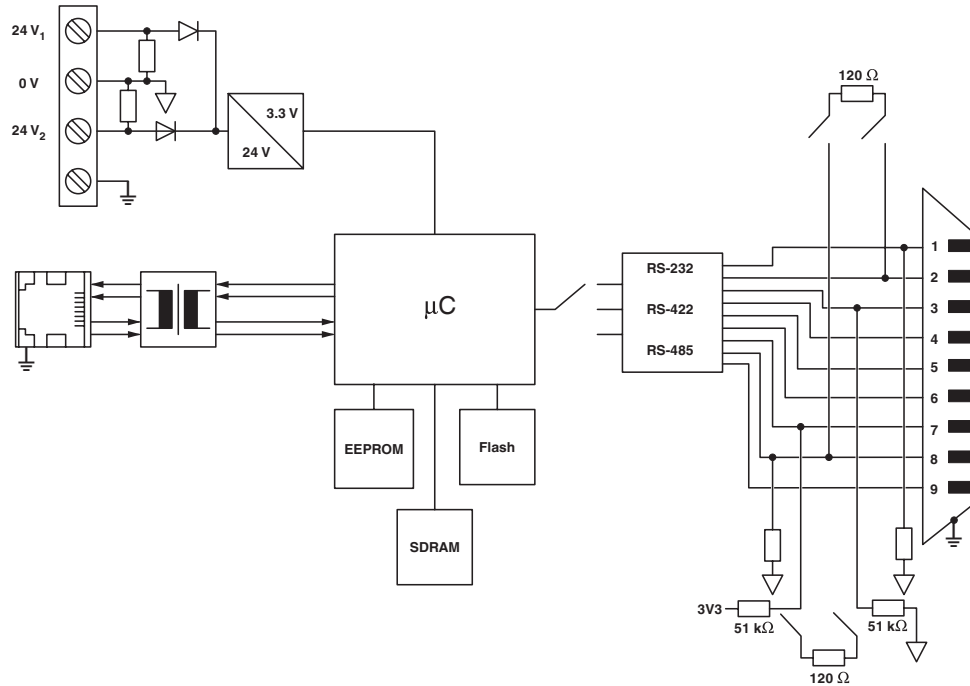

# GW EIP/ASCII 1E/2DB9 - Interface converters



2702773

<https://www.phoenixcontact.com/pc/products/2702773>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2702773>



### UL Listed

Approval ID: FILE E 238705



### cUL Listed

Approval ID: FILE E 238705



### IECEx

Approval ID: IECEx UL 18.0023X



### cUL Listed

Approval ID: FILE E 196811



### UL Listed

Approval ID: FILE E 196811



### ATEX

Approval ID: DEMKO 18 ATEX 2026X



### IECEx

Approval ID: IECEx UL 18.0023X



### ATEX

Approval ID: DEMKO 18 ATEX 2026X

cULus Listed

cULus Listed

# GW EIP/ASCII 1E/2DB9 - Interface converters



2702773

<https://www.phoenixcontact.com/pc/products/2702773>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27242208 |
| ECLASS-12.0 | 27242208 |
| ECLASS-13.0 | 27242208 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001423 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 43222600 |
|-------------|----------|

Environmental product compliance

|            |                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------|
| China RoHS | Environmentally Friendly Use Period = 50 years                                                               |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)