

2714271

<https://www.phoenixcontact.com/pc/products/2714271>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, nom. voltage: 400 V, nominal current: 41 A, Screw connection, 1st, 2nd and 3rd level, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup> - 10 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

Commercial data

Item number	2714271
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE1253
Catalog page	Page 591 (C-3-2013)
GTIN	4017918108755
Weight per piece (including packing)	34.184 g
Weight per piece (excluding packing)	33.032 g
Customs tariff number	85369010
Country of origin	GR

# PIK 6-PE/L/L - Installation ground terminal block



2714271

<https://www.phoenixcontact.com/pc/products/2714271>

## Technical data

### Product properties

Product type	Ground terminal block
Number of connections	5
Number of rows	3
Potentials	2

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	4 kV
---------------------	------

### Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	6 mm <sup>2</sup>

### 1st, 2nd and 3rd level

Screw thread	M3
Note	Please observe the current carrying capacity of the DIN rails.
Tightening torque	0.5 ... 0.6 Nm
Stripping length	9 mm
Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Cross section AWG	24 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	24 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Nominal current	41 A
Maximum load current	41 A (with 6 mm <sup>2</sup> conductor cross section)
Nominal voltage	400 V (phase conductor/phase conductor) 250 V (phase conductor/PE)
Nominal cross section	6 mm <sup>2</sup>

### Dimensions

Width	8.2 mm
-------	--------

### Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I

# PIK 6-PE/L/L - Installation ground terminal block



2714271

<https://www.phoenixcontact.com/pc/products/2714271>

Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
----------------------------------	-----------------------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# PIK 6-PE/L/L - Installation ground terminal block




2714271

<https://www.phoenixcontact.com/pc/products/2714271>

## Drawings

Circuit diagram

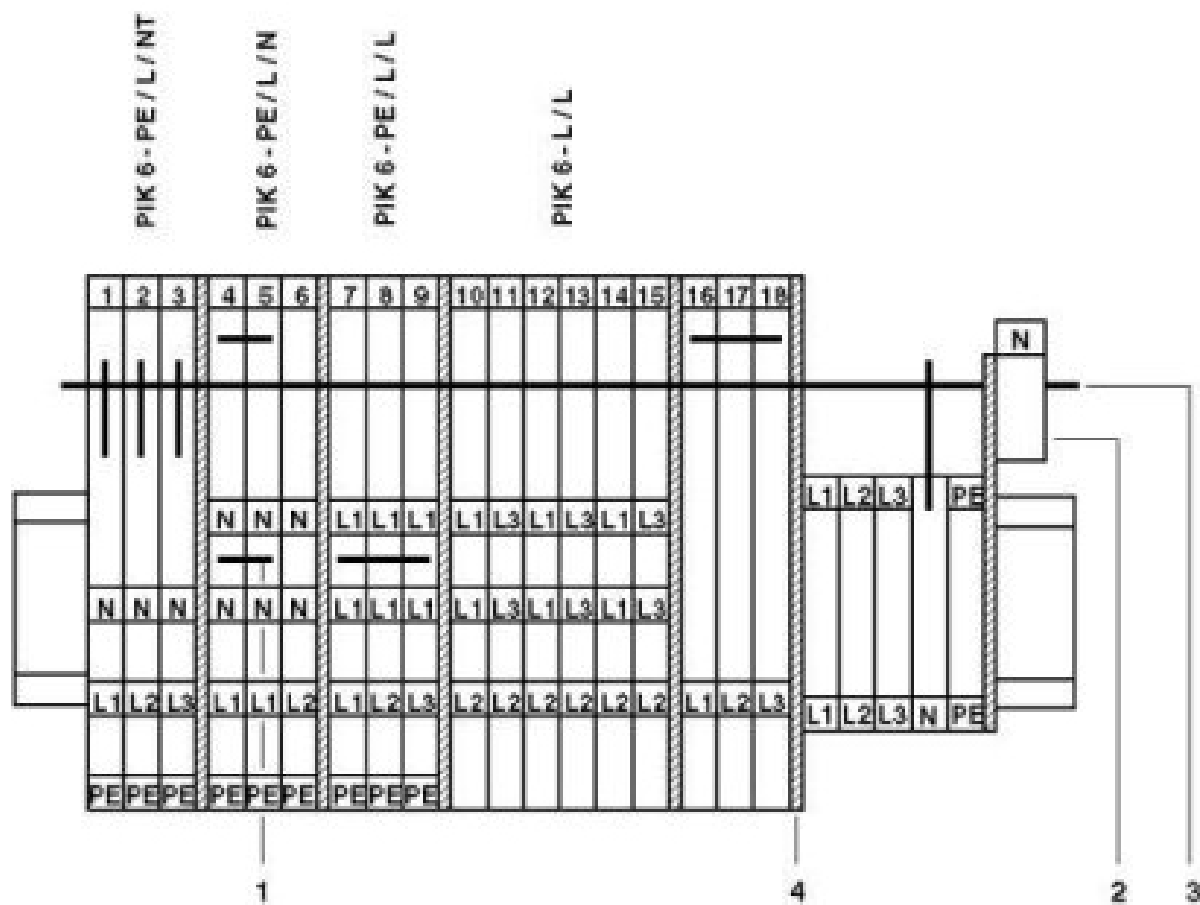

- 1 = cover
- 2 = fixed bridge
- 3 = N connection terminal block
- 4 = partition plate
- 5 = N busbar


# PIK 6-PE/L/L - Installation ground terminal block



2714271

<https://www.phoenixcontact.com/pc/products/2714271>

Circuit diagram

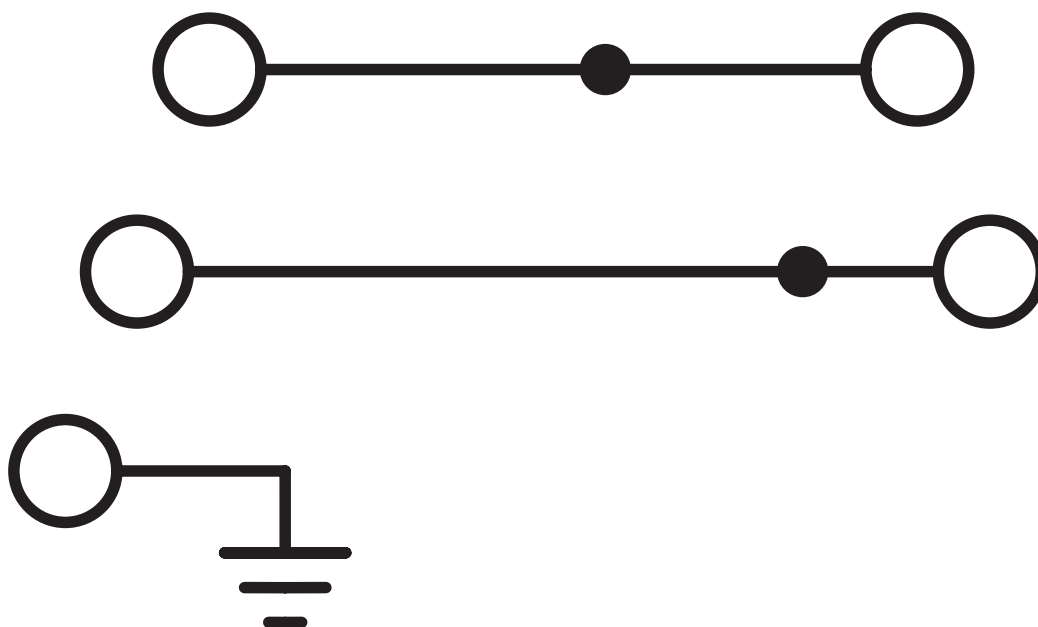

# PIK 6-PE/L/L - Installation ground terminal block



2714271

<https://www.phoenixcontact.com/pc/products/2714271>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)