

# DOK 1,5 - Initiator/actuator terminal block



2717016

<https://www.phoenixcontact.com/il/products/2717016>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Initiator/actuator terminal block, nom. voltage: 250 V, nominal current: 24 A, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- Same shape as DIK ... three-level initiator terminal blocks
- Terminal blocks with red and green LEDs are available for optical signaling of the initiator and actuator wiring
- The forks of the insertion bridge can be easily loosened for bridging between non-adjacent terminal blocks
- Unlike the DIK terminal blocks, the lower level of these output terminal blocks makes direct contact with the DIN rail and as a PE connection are marked yellow-green
- Because the spine of the insertion bridge can be snapped into place with the terminal block housing, all the terminal points can be wired freely and the bridge can be securely positioned
- The upper level contains the feed-through connections for the signal cable which can be labeled
- Alternate wiring of an actuator followed by an initiator is easy
- The middle level supplies the connected actuators with power

## Commercial data

Item number	2717016
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE1217
Catalog page	Page 484 (C-1-2019)
GTIN	4017918062040
Weight per piece (including packing)	15.777 g
Weight per piece (excluding packing)	15.777 g
Customs tariff number	85369010
Country of origin	PL

# DOK 1,5 - Initiator/actuator terminal block



2717016

<https://www.phoenixcontact.com/il/products/2717016>

## Technical data

### Product properties

Product type	Sensor/actuator terminal block
Number of connections	4
Number of rows	3
Potentials	3

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.77 W

### Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	2.5 mm <sup>2</sup>

### Level 1+2+3

Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	8 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross-section with insertion bridge, rigid	4 mm <sup>2</sup>
Cross-section with insertion bridge, flexible	2.5 mm <sup>2</sup>
2 conductors with same cross section, solid	0.2 mm <sup>2</sup> ... 1 mm <sup>2</sup>
2 conductors with same cross section, flexible	0.2 mm <sup>2</sup> ... 1 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 1 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>
Nominal current	24 A
Maximum load current	26 A (with a 2.5 mm <sup>2</sup> conductor cross section)
Nominal voltage	250 V
Nominal cross section	2.5 mm <sup>2</sup>

# DOK 1,5 - Initiator/actuator terminal block



2717016

<https://www.phoenixcontact.com/il/products/2717016>

## Dimensions

Width	6.2 mm
Height	61.5 mm
Depth on NS 35/7,5	54.5 mm
Depth on NS 35/15	62 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Needle-flame test

Time of exposure	30 s
------------------	------

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
---------------	-------------------------------------

### Shocks

Test directions	X-, Y- and Z-axis (pos. and neg.)
-----------------	-----------------------------------

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations


Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
----------------------------------	-----------------------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

## Drawings

Circuit diagram

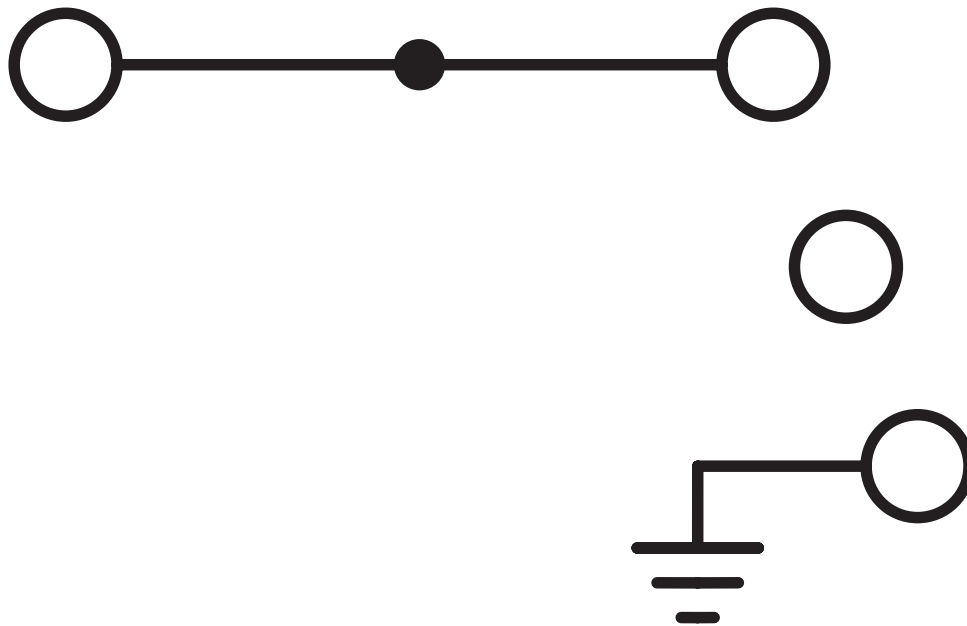


# DOK 1,5 - Initiator/actuator terminal block

2717016

<https://www.phoenixcontact.com/il/products/2717016>

Circuit diagram

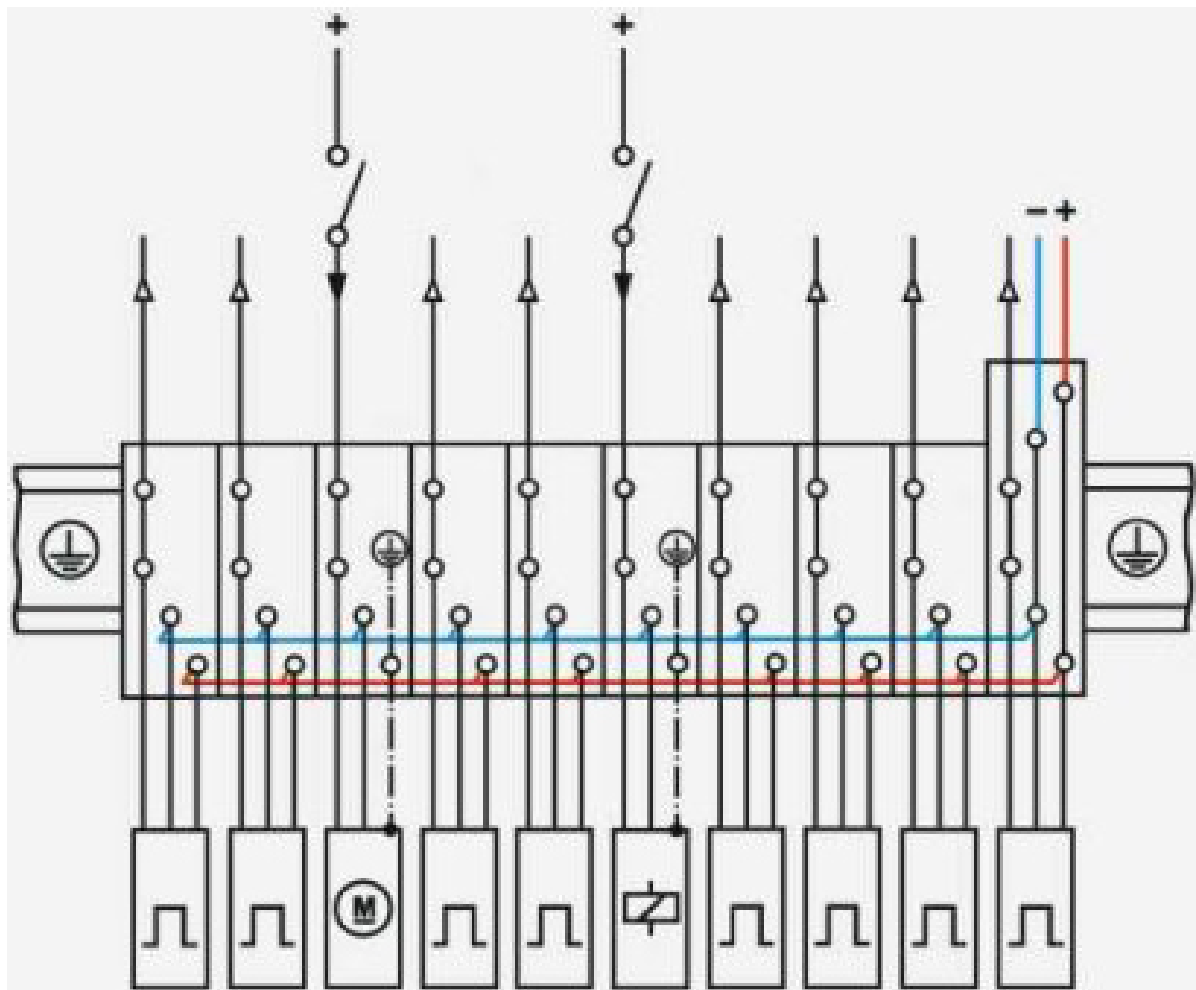

# DOK 1,5 - Initiator/actuator terminal block




2717016


<https://www.phoenixcontact.com/il/products/2717016>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/il/products/2717016>

 <b>CSA</b> Approval ID: 13631				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	300 V	15 A	28 - 14	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

 <b>cULus Recognized</b> Approval ID: E60425				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group B				
	300 V	15 A	30 - 14	-
PE connection	-	-	30 - 14	-
Use group C				
	150 V	15 A	30 - 14	-
PE connection	-	-	30 - 14	-
Use group D				
	150 V	15 A	30 - 14	-

# DOK 1,5 - Initiator/actuator terminal block



2717016

<https://www.phoenixcontact.com/il/products/2717016>

## Classifications

### ECLASS

ECLASS-11.0	27141128
ECLASS-12.0	27141128
ECLASS-13.0	27250112

### ETIM

ETIM 9.0	EC000900
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# DOK 1,5 - Initiator/actuator terminal block



2717016  
<https://www.phoenixcontact.com/il/products/2717016>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Israel Ltd.  
P.O.B. 1799 Industrial Park Hasharon  
Quadima 60920  
+972-9-8915700  
[info@phoenixcontact.co.il](mailto:info@phoenixcontact.co.il)