

IBS IL 24 RB-T - Branch terminal



2727941
<https://www.phoenixcontact.com/pc/products/2727941>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



INTERBUS branch terminal block, without accessories, with remote bus branch, 24 V DC

Product description

With this Inline bus terminal module, a remote bus branch can be opened directly from an Inline station. This makes it possible to extend the INTERBUS network by further system levels. A total of up to 15 levels can be operated in the network. The connection of the outgoing remote bus branch is also made using the Inline shield connector. The standard INTERBUS copper line is used for this connection.

The terminals can be labeled using hinged labeling fields. The fields have insert cards that can be labeled individually to suit the application. Additionally, there is the ZBFM -6... Zack strip for labeling the terminal points.

Commercial data

Item number	2727941
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DRI152
Catalog page	Page 42 (AX-2007)
GTIN	4017918185589
Weight per piece (including packing)	72.1 g
Weight per piece (excluding packing)	50.19 g
Customs tariff number	85389091
Country of origin	DE

IBS IL 24 RB-T - Branch terminal



2727941

<https://www.phoenixcontact.com/pc/products/2727941>

Technical data

Product properties

Type	modular
------	---------

System properties

Module

ID code (dec.)	04
ID code (hex)	04
Length code (hex)	0
Length code (dec)	0
Process data channel	0 bit
Input address area	0 Byte
Output address area	0 Byte
Register length	0 bit

Electrical properties

Potentials: Supply of analog modules (U_{ANA})

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	typ. 29 mA

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply, incoming remote bus, electrically isolated from 5 V supply, outgoing remote bus	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply, incoming remote bus, electrically isolated from 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply, incoming remote bus, electrically isolated from 24 V main supply, 24 V segment supply	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply incoming remote bus / functional ground	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply, outgoing remote bus, electrically isolated from 5 V supply, incoming remote bus	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply, outgoing remote bus, electrically isolated from 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply, outgoing remote bus, electrically isolated from 24 V main supply, 24 V segment supply	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply outgoing remote bus, electrically isolated from functional ground	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block, electrically isolated from 5 V supply incoming remote bus	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block, electrically isolated from 5 V supply outgoing remote bus	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V logics supply, 24 V analog supply, 24 V bus	500 V AC, 50 Hz, 1 min

IBS IL 24 RB-T - Branch terminal



2727941

<https://www.phoenixcontact.com/pc/products/2727941>

terminal module supply, 5 V logics supply branch terminal block, electrically isolated from 24 V main supply, 24 V segment supply	
Test voltage: 7.5 V communications power, 24 V analog supply, 24 V bus terminal module supply, 5 V communications power, bus branch terminal electrically isolated from functional ground	500 V AC, 50 Hz, 1 min
Test voltage: 24 V main supply, 24 V segment supply, electrically isolated from 5 V supply, incoming remote bus	500 V AC, 50 Hz, 1 min
Test voltage: 24 V main supply, 24 V segment supply, electrically isolated from 5 V supply, outgoing remote bus	500 V AC, 50 Hz, 1 min
Test voltage: 24 V main supply, 24 V segment supply, electrically isolated from 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block	500 V AC, 50 Hz, 1 min
Test voltage: 24 V main supply, 24 V segment supply, electrically isolated from the functional ground	500 V AC, 50 Hz, 1 min

Connection data

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16

Interfaces


Inline local bus

Connection method	Inline data jumper
Transmission speed	500 kbps

INTERBUS

Connection method	Inline shield connector
Transmission speed	500 kbps
Transmission physics	RS-485

Dimensions

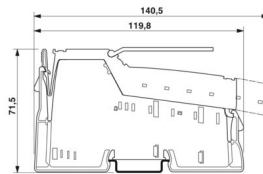Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Material specifications

Color	green
-------	-------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	75 % (On average, 85 % occasionally)
Permissible humidity (storage/transport)	75 % (On average, 85 % occasionally)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

IBS IL 24 RB-T - Branch terminal


2727941

<https://www.phoenixcontact.com/pc/products/2727941>




Drawings

Connection diagram

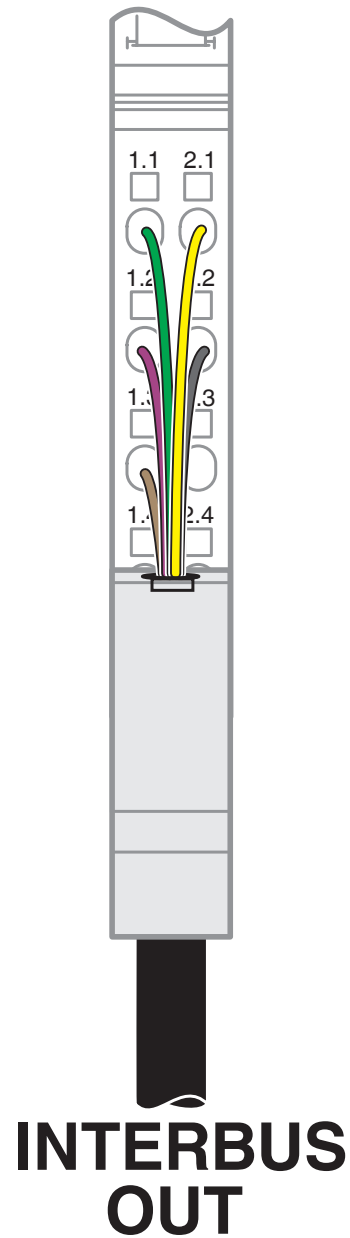

Dimensional drawing

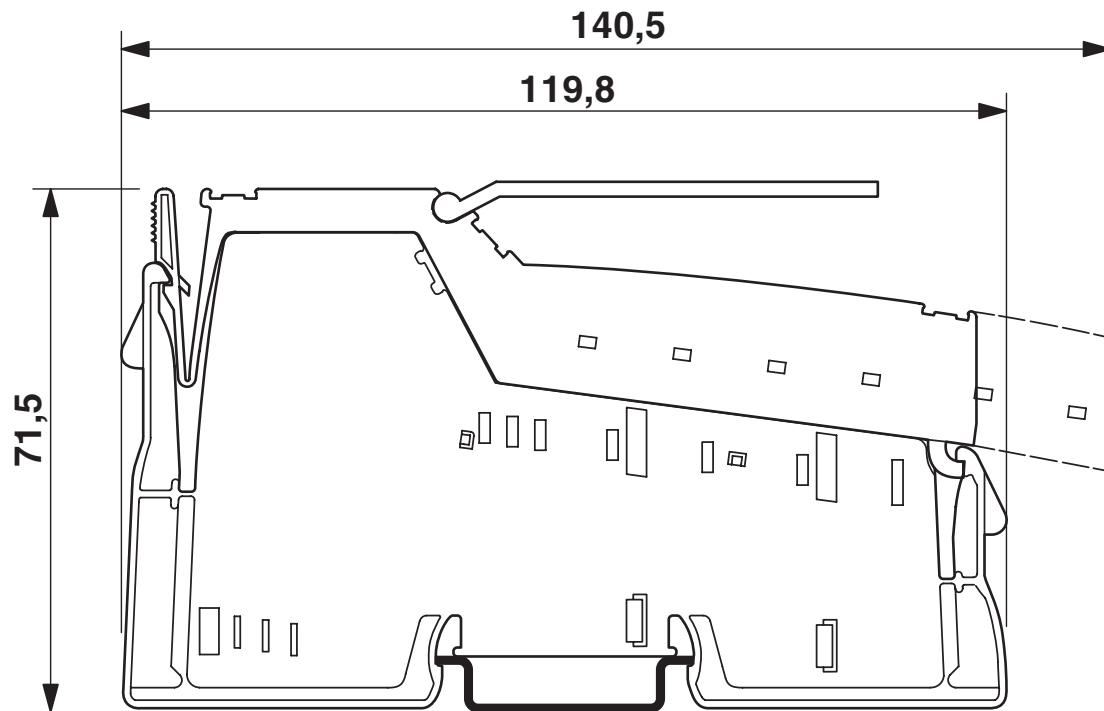

IBS IL 24 RB-T - Branch terminal



2727941

<https://www.phoenixcontact.com/pc/products/2727941>

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com