

Distributed I/O device - FLS DN M12 DIO 8/8 M12 - 2736398

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The stand-alone device for DeviceNet™ has 8 digital inputs and 8 digital outputs each with a load capacity of 500 mA. The M12 connection is established using fast connection technology. The 24 V DC supply is protected against short circuit and overload.

Why buy this product

- ✓ Flexible power supply concept
- ✓ Short-circuit and overload protection
- ✓ Diagnostic and status indicators
- ✓ SPEEDCON fast locking system
- ✓ Directly accessible address encoding switch
- ✓ Consistent connection via M12 connectors



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 960070
GTIN	4017918960070

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	60 mm
Height	178 mm
Depth	49.3 mm
Drill hole spacing	168 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

Distributed I/O device - FLS DN M12 DIO 8/8 M12 - 2736398

Technical data

Ambient conditions

Permissible humidity (storage/transport)	95 %
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP65/IP67

General

Mounting type	Wall mounting
Net weight	340 g

Interfaces

Designation	DeviceNet™
Connection method	2 M12 connectors, A-coded
Transmission speed	125 kbps, 250 kbps, 500 kbps (Automatic baud rate detection)
Transmission physics	Copper cable in acc. with DeviceNet™ specification
Address area assignment	0 ... 63, can be set
Number of positions	5

Power supply for module electronics

Connection method	M12 connector, (A-coded)
Designation	U _L
Supply voltage	24 V DC
Supply voltage range	12 V DC ... 30 V DC (including ripple)

Fieldline potentials

Voltage supply U _L	24 V DC
Power supply at U _L	max. 4 A
Current consumption from U _L	typ. 60 mA
	max. 100 mA
Voltage supply U _S	24 V DC
Power supply at U _S	max. 4 A
Current consumption from U _S	typ. 10 mA (plus sensor current)
	max. 500 mA
Voltage supply U _{A11}	24 V DC
Power supply at U _{A11}	max. 4 A
Current consumption at U _{A11}	typ. 6 mA (plus actuator current)
	max. 4 A
Voltage supply U _{A12}	24 V DC
Power supply at U _{A12}	max. 4 A
Current consumption at U _{A12}	typ. 6 mA (plus actuator current)
	max. 4 A

Digital inputs

Input name	Digital inputs
------------	----------------

Distributed I/O device - FLS DN M12 DIO 8/8 M12 - 2736398

Technical data

Digital inputs

Connection method	M12 connector, double occupancy
Connection technology	2, 3, 4-wire
Number of inputs	8
Filter time	3 ms
Input characteristic curve	IEC 61131-2 type 1
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	13 V DC ... 30 V DC

Digital outputs

Output name	Digital outputs
Connection method	M12 connector, double occupancy
Connection technology	2, 3-wire
Number of outputs	8
Type of protection	Short-circuit protection
Output voltage	24 V DC
Maximum output current per channel	500 mA

Electrical isolation

Test section	To I/O 500 V AC 50 Hz 1 min.
--------------	------------------------------

Standards and Regulations


Mechanical tests	Shock in acc. with EN 60068-2-27/IEC 60068-2-27 Load 30g, half sine wave, positive and negative per direction
	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 5g in each space direction
Connection in acc. with standard	CUL
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Connection diagram

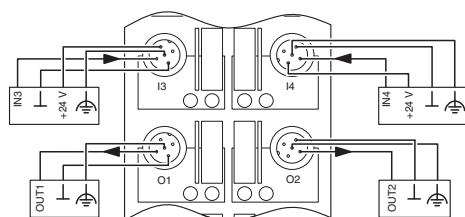

Dimensional drawing

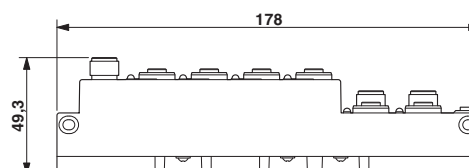

Distributed I/O device - FLS DN M12 DIO 8/8 M12 - 2736398

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / DeviceNet / cULus Recognized

Ex Approvals

UL Recognized / cUL Recognized / cULus Recognized

Approval details

UL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 140324

cUL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 140324

DeviceNet



<http://www.odva.org>

10128/24.03.04

cULus Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>