

C-UFB- 5DC/E 75 - Surge protection device



2763604

<https://www.phoenixcontact.com/in/products/2763604>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Attachment plug with surge voltage coarse and fine protection, for coaxial signal interfaces with floating shield, signal voltage 5 V. Connection: BNC socket/plug

Your advantages

- Easy installation with system-compliant connection
- Low signal interference with adapted protective circuit
- Limitation of energy-rich pulses with powerful protection

Commercial data

Item number	2763604
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	CL3
Product key	CL3313
Catalog page	Page 201 (C-4-2019)
GTIN	4017918347772
Weight per piece (including packing)	113 g
Weight per piece (excluding packing)	102.8 g
Customs tariff number	85363010
Country of origin	DE

C-UFB- 5DC/E 75 - Surge protection device



2763604

<https://www.phoenixcontact.com/in/products/2763604>

Technical data

Product properties

IEC test classification	C2
	C3
	D1
Type	Attachment plug
Product type	Surge protection for transceiver systems
Surge protection fault message	none

Connection data

Connection method	BNC 75 Ω
-------------------	-----------------

Dimensions

Width	25.4 mm
Height	25.4 mm
Depth	93 mm

Material specifications

Color	black (RAL 9005)
Housing material	Aluminum

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	Line-Shield/Earth Ground
Maximum continuous voltage U_C	5 V DC
Rated current	185 mA (25 °C)
Operating effective current I_C at U_C	$\leq 300 \mu A$
Residual current I_{PE}	$\leq 2 \mu A$
Nominal discharge current I_n (8/20) μs (line-ground)	10 kA
Nominal discharge current I_n (8/20) μs (line-shield)	10 kA
Total discharge current I_{total} (8/20) μs	20 kA
Output voltage limitation at 1 kV/ μs (line-earth) spike	$\leq 500 V$
Output voltage limitation at 1 kV/ μs (line-shield) spike	$\leq 35 V$
Output voltage limitation at 1 kV/ μs (line-shield) static	$\leq 15 V$
Residual voltage at I_n (conductor-shield)	$\leq 12 V$
Voltage protection level U_p (line-earth)	$\leq 500 V$ (C1 - 1 kV / 500 A)
	$\leq 500 V$ (C3 - 10 A)
Voltage protection level U_p (line-shield)	$\leq 25 V$ (C3 - 10 A)
	$\leq 55 V$ (C1 - 1 kV / 500 A)

C-UFB- 5DC/E 75 - Surge protection device



2763604

<https://www.phoenixcontact.com/in/products/2763604>

Response time t_A (line-earth)	≤ 100 ns
Response time t_A (line-shield)	≤ 500 ns
Input attenuation aE, asym.	1.3 dB (≤ 5 MHz)
Cut-off frequency f_g (3 dB), asym. (shield) in 50 Ω system	typ. 80 MHz
Surge protection fault message	none
Impulse durability (line-earth)	C2 - 10 kV / 5 kA
	D1 - 2.5 kA

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C

Standards and regulations

Air clearances and creepage distances

Standards/regulations	VDE 0110-1 / IEC 60664-1
-----------------------	--------------------------

Standards Information technology specification

Standards/regulations	IEC 61643-21
	IEC 61643-21
Standards/specifications	IEC 61643-21
Note	2000

Mounting

Mounting type	Connection-specific intermediate plugging
---------------	---

C-UFB- 5DC/E 75 - Surge protection device


2763604

<https://www.phoenixcontact.com/in/products/2763604>



Drawings

Circuit diagram

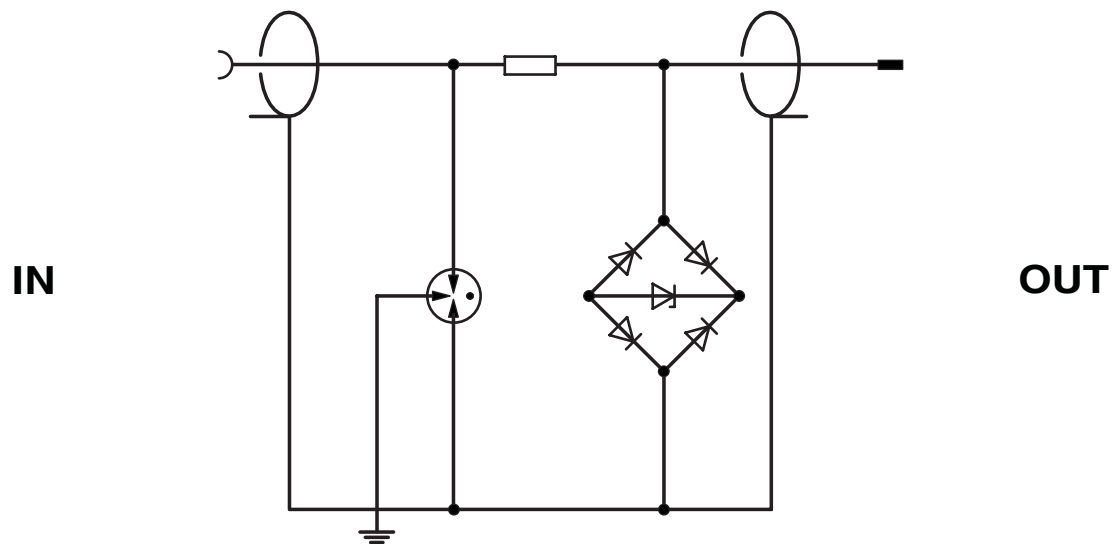

C-UFB- 5DC/E 75 - Surge protection device



2763604

<https://www.phoenixcontact.com/in/products/2763604>

Approvals

📄 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2763604>



EAC

Approval ID: EAC-Zulassung



EAC

Approval ID: RU C-DE.*09.B.00169

C-UFB- 5DC/E 75 - Surge protection device



2763604

<https://www.phoenixcontact.com/in/products/2763604>

Classifications

ECLASS

ECLASS-11.0	27130807
ECLASS-13.0	27171503

ETIM

ETIM 9.0	EC001466
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

C-UFB- 5DC/E 75 - Surge protection device



2763604
<https://www.phoenixcontact.com/in/products/2763604>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in