

Miniature circuit-breaker

Part no. FAZ-B20/3

Article no. 278848



Delivery programme

Range			FAZ miniature circuit-breakers
Basic function			Miniature circuit-breakers
Tripping characteristic			B
Application			Instantaneous release response current 3 - 5 x I _n
Switching capacity			Switching capacity 15 kA (IEC/EN 60947-2)
Rated current	I _n	A	20
Pole			3 pole
Notes			With 3 protected poles
Contact sequence			

- Notes
- Switching capacity

10 kA
- (IEC/EN 60898)

Switching capacity

15 kA
- (IEC/EN 60947-2)

Accessories

→ 286054
- Auxiliary contacts

Voltage releases

Mounting accessories


FAZ-B4/1-HS, FAZ-B4/2-HS special miniature circuit-breakers with much reduced let-through energy to prevent contact welding of **auxiliary contacts**

2-pole; 1N-pole
- 1 pole



Depth 71 mm

Width 17.5 mm
- Depth 71 mm


Width 35 mm

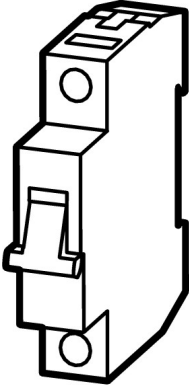

3 pole
Depth 71 mm
Width 52.5 mm



4-pole; 3-pole + N
Depth 71 mm
Width 70 mm



Approbationen

- Product Standards

UL File No.

UL CCN

CSA File No.

CSA Class No.
- IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking

E177451

QVNU2, QVNU8

204453

3215-30

NA Certification
Conditions of Acceptability
Suitable for
Current Limiting CB
Max. Voltage Rating
Degree of Protection

UL Recognized, CSA certified
Supplementary Protector only
Branch Circuits; not as BCPD
No
480Y/277 VAC
IEC: IP20; UL/CSA Type: -

Electrical


Standards			IEC/EN 60947-2 IEC/EN 60898
Rated operational voltage	U _e	V	
	U _e	V AC	230/400
		V DC	48 (per pole)
Rated switching capacity		kA	15
Operational switching capacity		kA	7.5
Characteristic			B, C, D
Max. back-up fuse		A gL/gG	125
Selectivity Class			3
Lifespan	Operations		> 10000
Direction of incoming supply			As required

Mechanical


Standard front dimension		mm	45
Enclosure height		mm	80
Terminal protection			Finger and back-of-hand proof to BGV A2
Mounting width per pole		mm	17.5
Mounting			IEC/EN 60715 top-hat rail
Protection type			IP20, IP40 (when fitted)
Terminals top and bottom			Twin-purpose terminals
Terminal capacities		mm ²	
		mm ²	1 x 25
		mm ²	2 x 10
Thickness of busbar material		mm	0.8 ... 2
Mounting position			As required


Technische Daten nach ETIM 4.0


Frequency		Hz	50 Hz
Voltage type			AC
Mounting depth		mm	71 mm
Rated current		A	20 A
Rated voltage		V	400 V
Trip type			B
Number of poles			3
Current-limiting class			3
Overvoltage category			3
Pollution degree			2
Width in space units			3
Protection type (IP)			IP20
Neutral conductor switching with pole			false
Rated switching capacity according to EN 60898		kA	10 kA
Rated switching capacity according to IEC 60947-2		kA	0 kA
Additional equipment possible			true

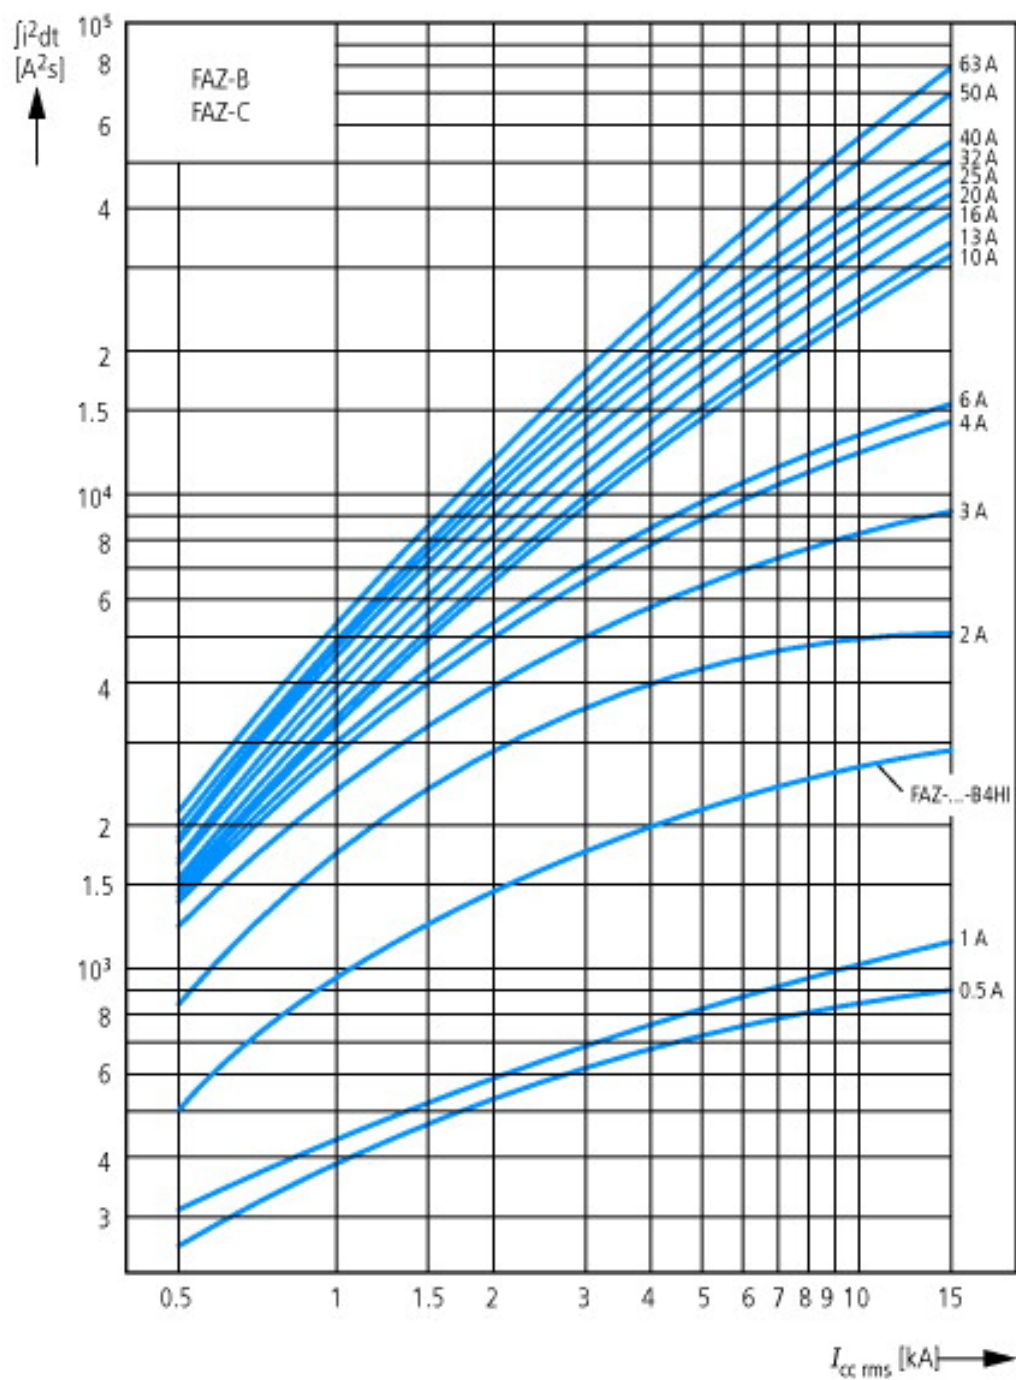


Let-through energy I^2t
According to IEC/EN 60898

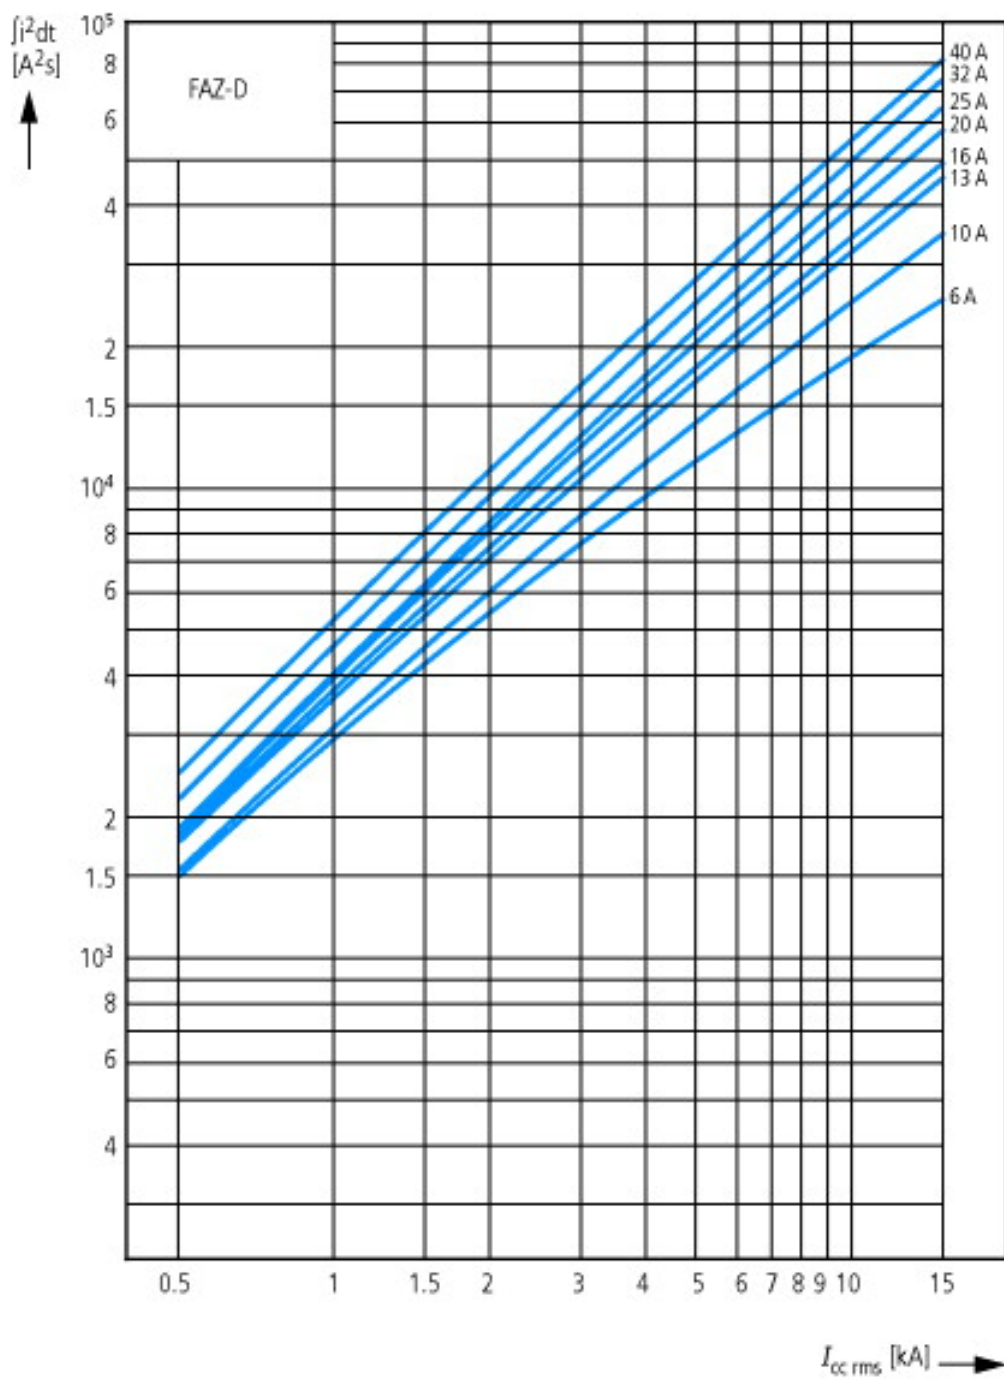

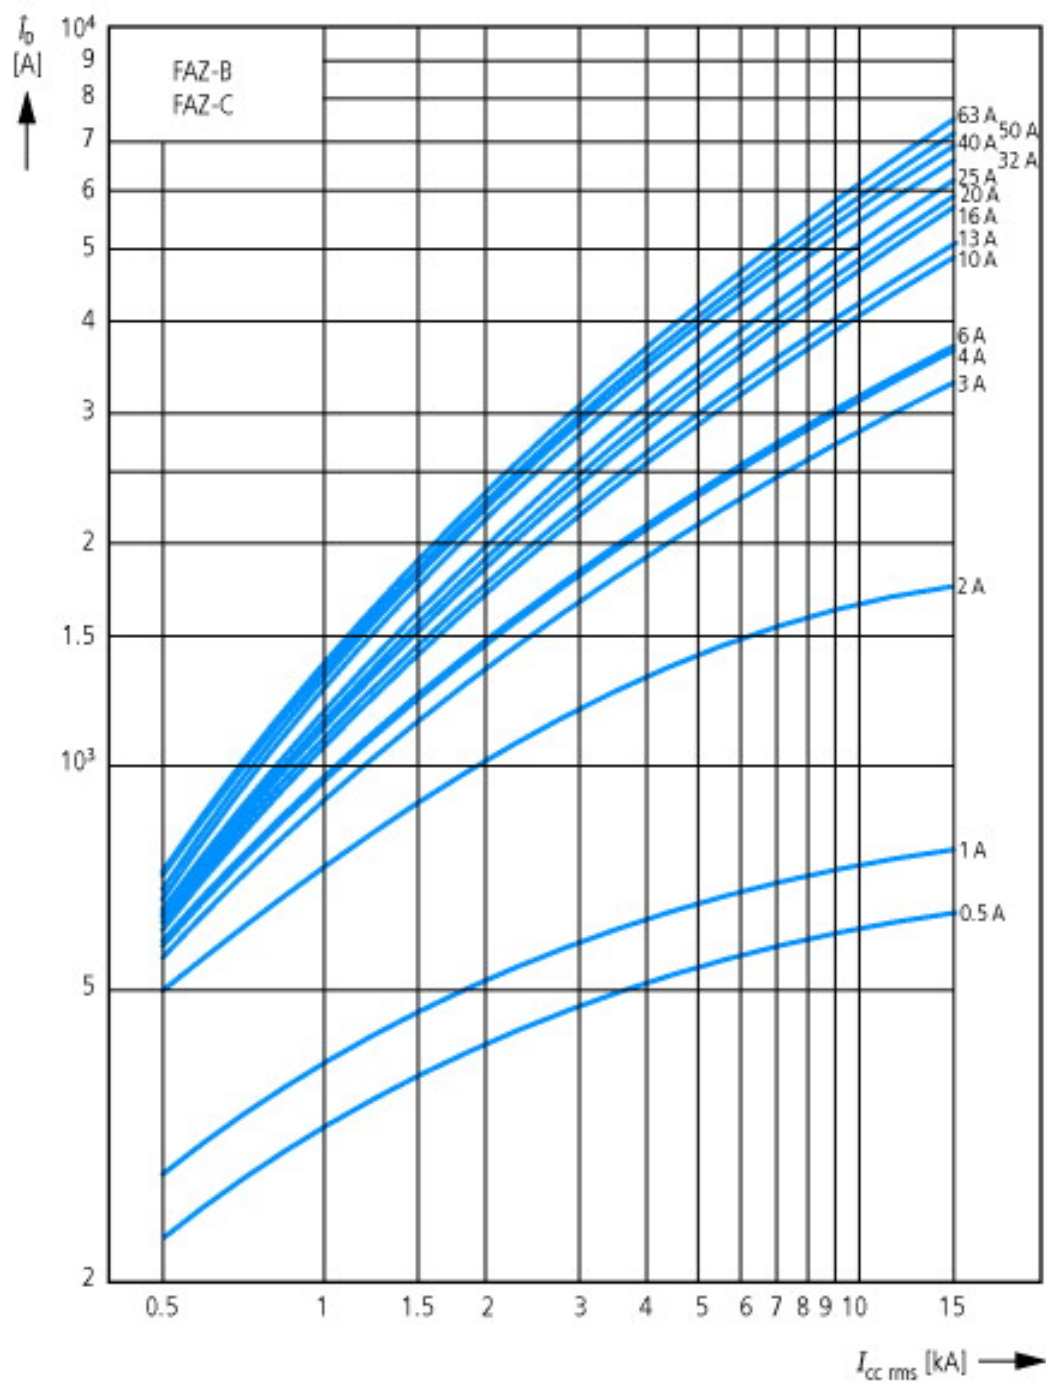

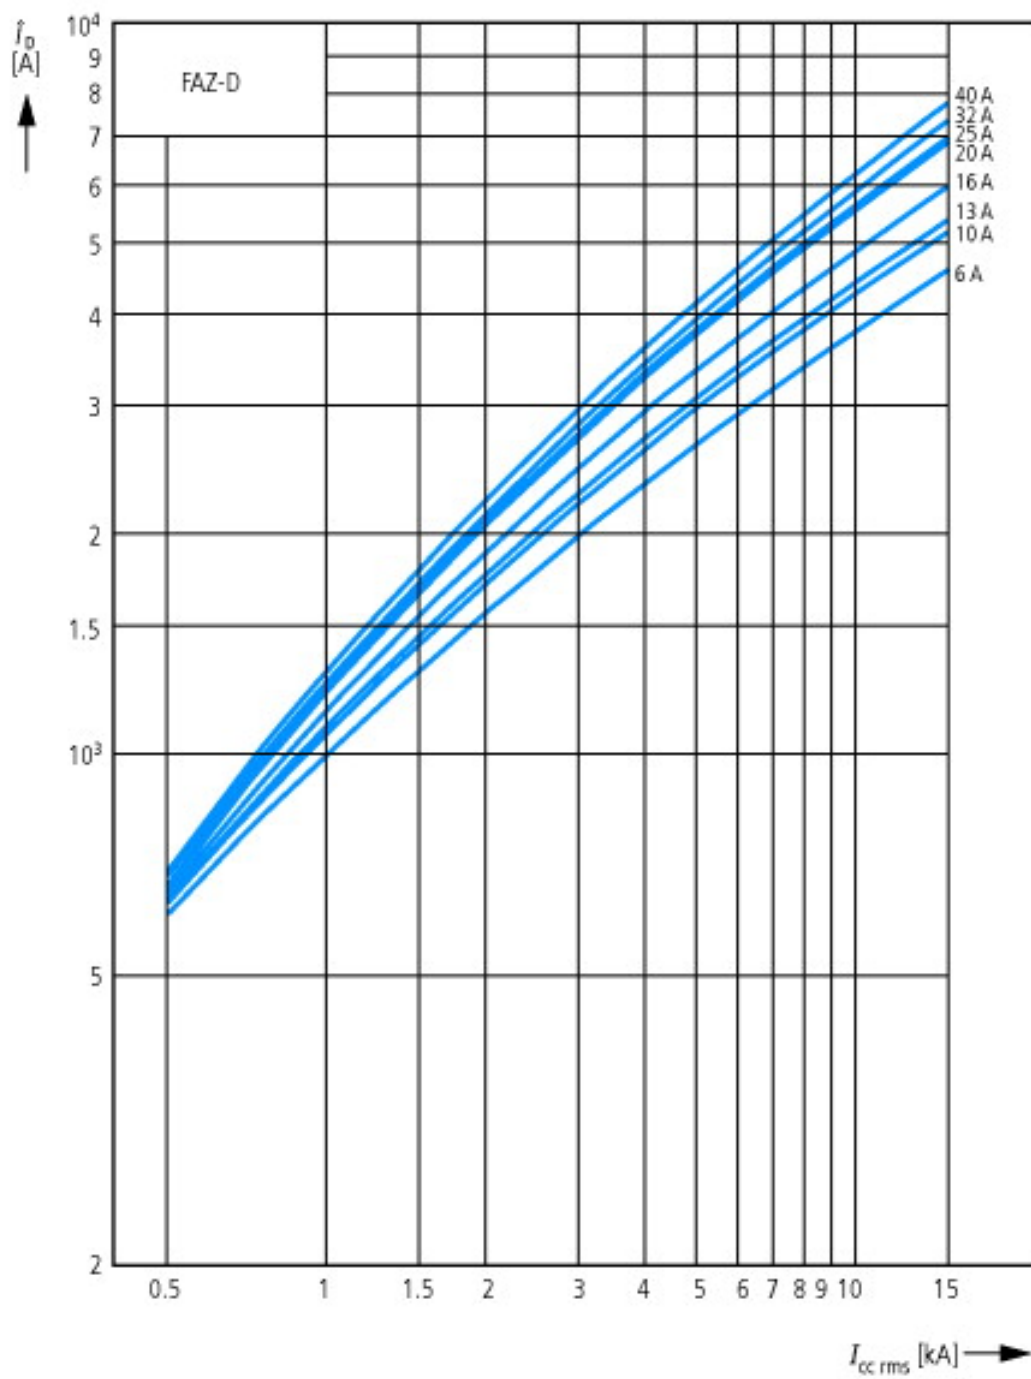

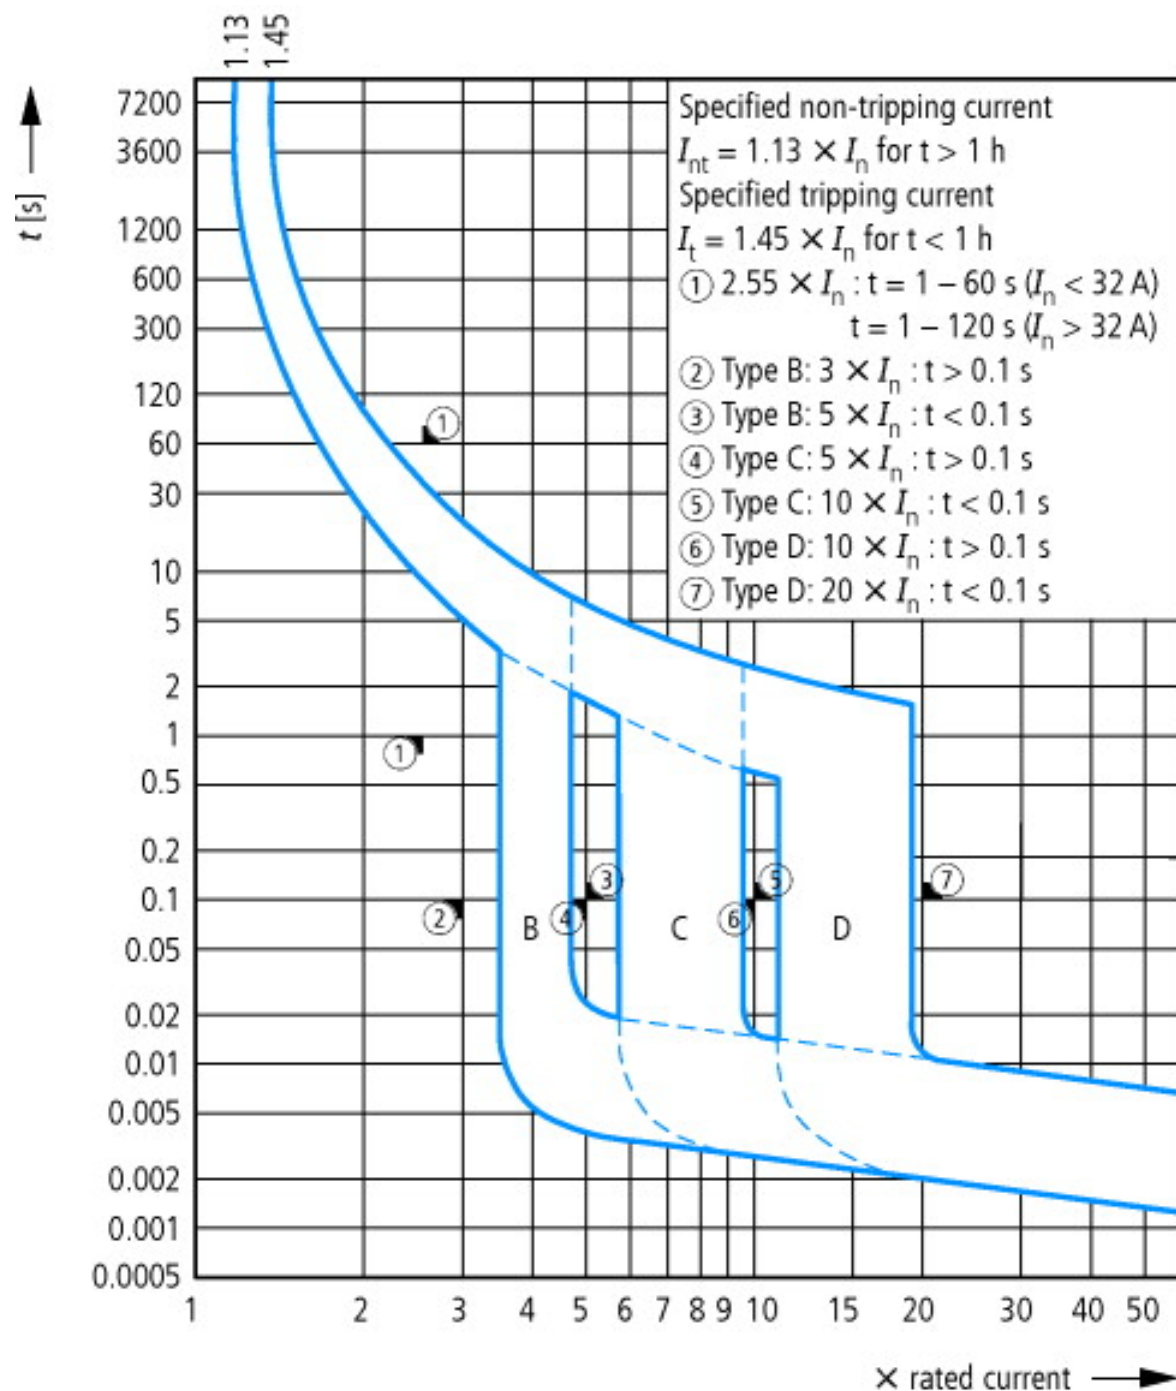


Tripping characteristic at 30 °C:
 B, C, D to IEC/EN 60898

CAD-Daten

Product standards CAD data:

<http://eaton-moeller.partcommunity.com>

Dimensions

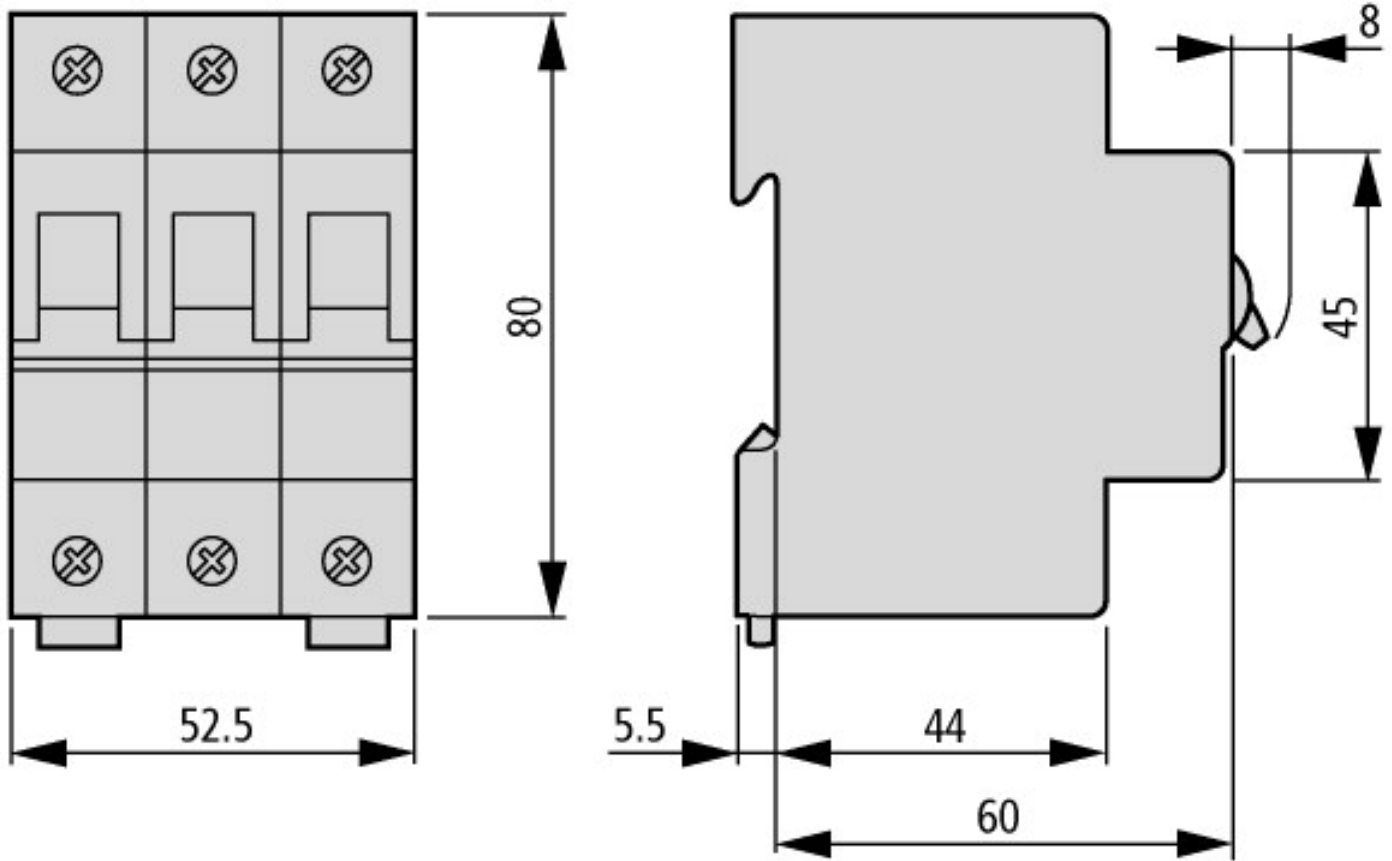

Additional product information (links)

AWA1220-1755 Miniature circuit-breakers

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17550701.pdf