



**Door coupl.rot.handle,lock.w/o ext.shaft**

**Part no.** **NZM2-XTVD-0**

**Article no.** **279393**



Complete including rotary drive and coupling parts

An additional extension shaft is necessary with the NZM...-XT(V)D(V)(R)(-60) types.

Degree of protection IP66, UL/CSA Type 4X, Type 12



**Delivery programme**

Function			Standard, black/grey
Protection class			IP66 UL/CSA Type 4X, Type 12
Locking facility			lockable on the 0 position on the handle using up to 3 padlocks With door interlock
Door interlock			Not defeated in the locked OFF and ON positions Can be modified in the unlocked ON position Can be modified such that it can be defeated from the outside using a screwdriver Door can be opened in OFF
Project planning information			Complete including rotary drive and coupling parts For extremely narrow fittings With special short extension shaft Cannot be combined with NZM...-XDZ additional handle External warning plate/designation label can be clipped on.
For use with			NZM2(-4), PN2(-4), N(S)2(-4)
lockable			single
<b>Notes</b>			
Circuit-breaker can also be installed in a lying position 90 ° left/right, with the handle still in the same position.			

**Technische Daten nach ETIM 4.0**


Suitable for switch-disconnector			YES
Suitable for circuit-breakers			YES
With shaft			No
Suitable for emergency switching off			No
Lockable			YES
Color			black

**Dimensions**

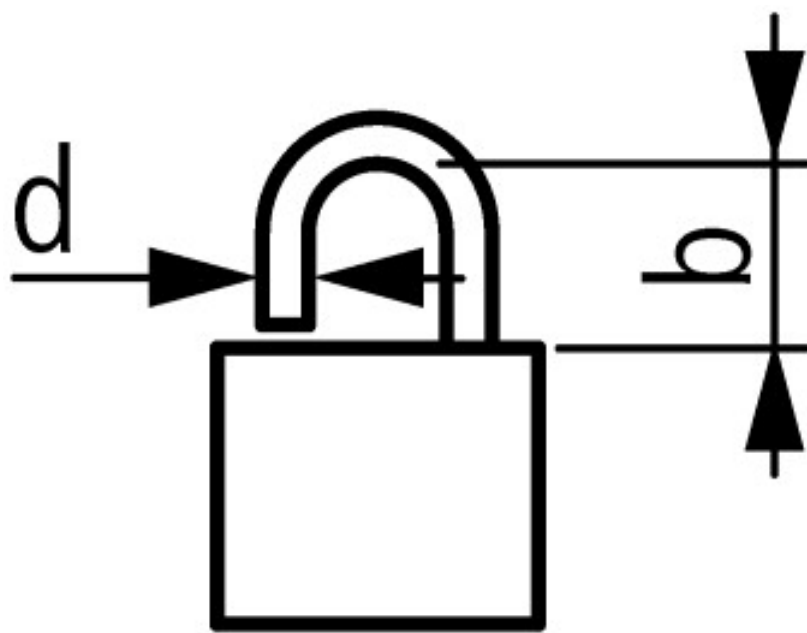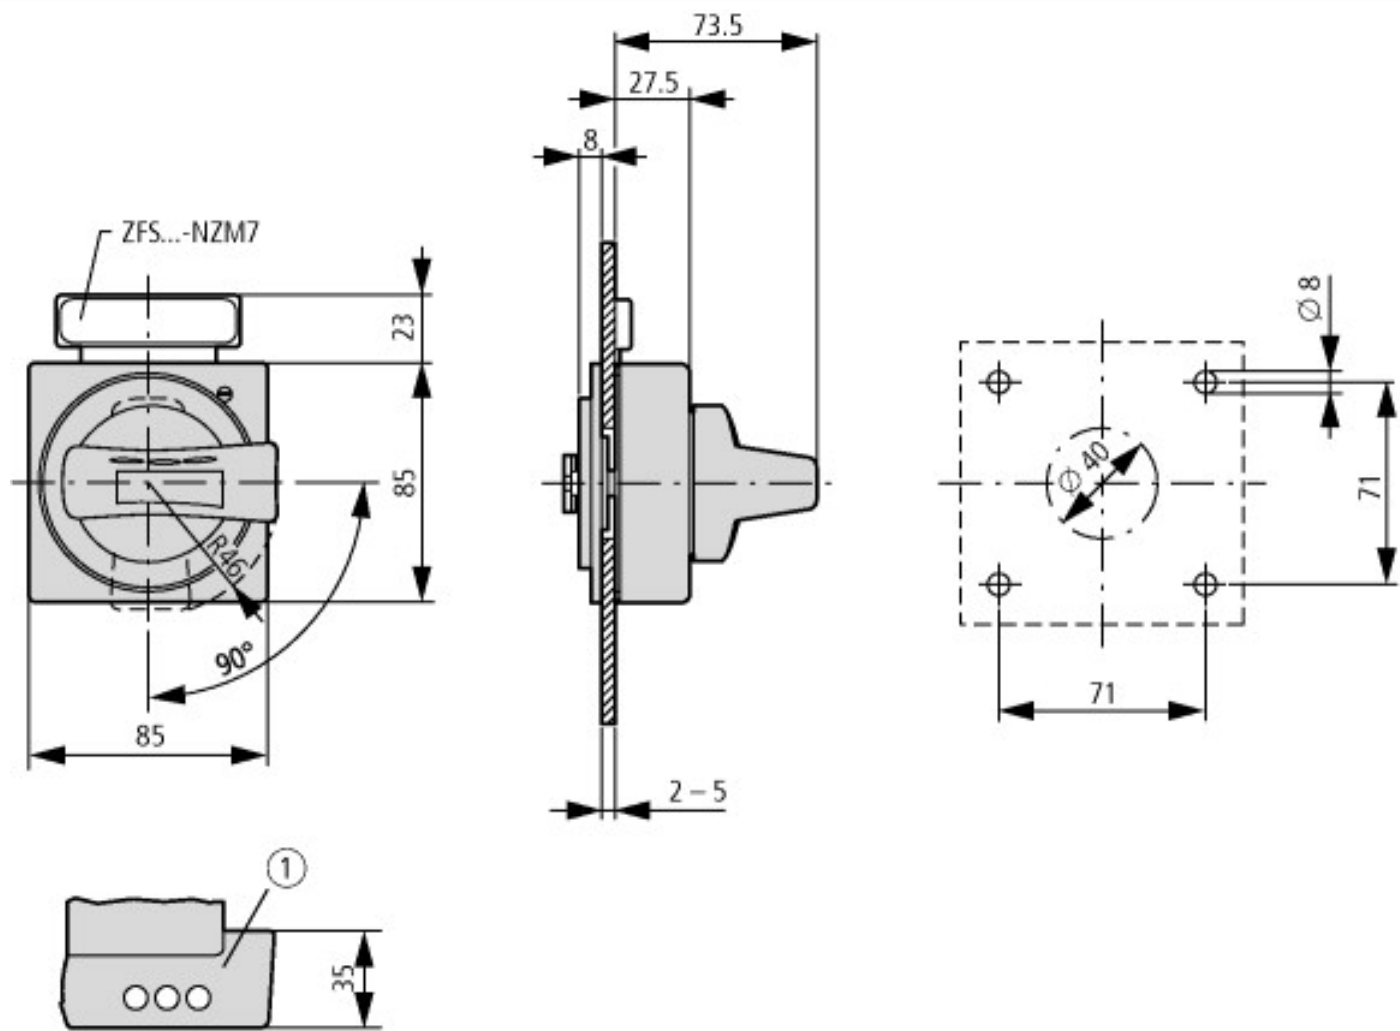

$$d = 4 - 8$$

$$b \geq 34$$

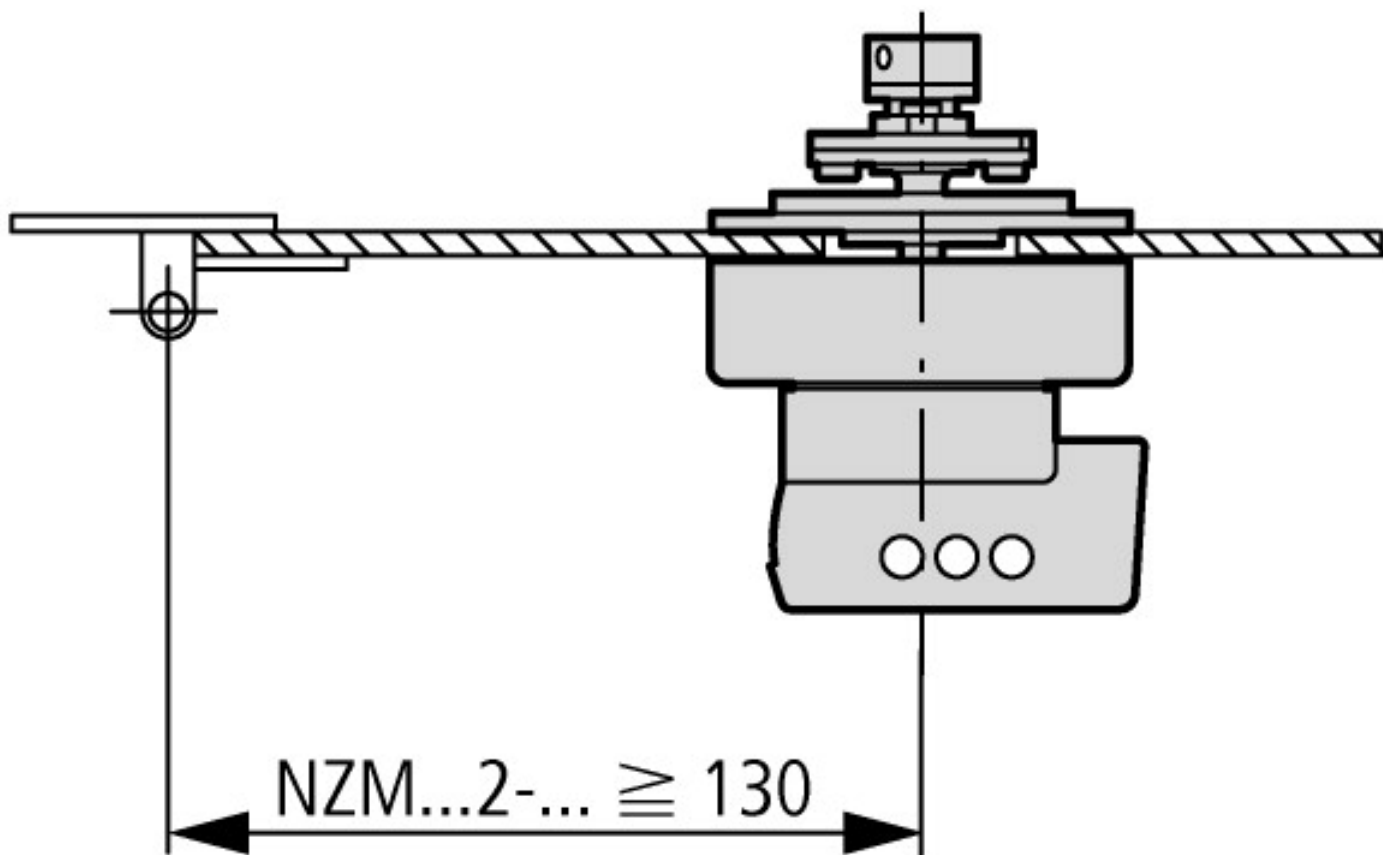

Minimum door coupling rotary handle clearance from door pivot point

#### Additional product information (links)

IL01219004Z (AWA1230-2119) Door coupling rotary handle, short

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL01219004Z2010\\_09.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219004Z2010_09.pdf)