

2799429

<https://www.phoenixcontact.com/us/products/2799429>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Coupling; set consisting of 2 couplings for connecting B-FOC plugs



Commercial data

Item number	2799429
Packing unit	1 pc
Sales key	AB16
Product key	ABNIDA
Catalog page	Page 380 (C-2-2019)
GTIN	4017918118389
Weight per piece (including packing)	19.3 g
Weight per piece (excluding packing)	19.3 g
Customs tariff number	85366990
Country of origin	DE

PSM-SET-BFOC-LINK/2 - Fiber optic coupling



2799429

<https://www.phoenixcontact.com/us/products/2799429>

Technical data

Product properties

Product type	Data plug
Application	Fiber optic coupling
Sensor type	Ethernet
Connection profile	B-FOC (ST®)
Type	Socket


Electrical properties

Attenuation	< 2 dB
-------------	--------

Connection data

Connection method	Coupling
-------------------	----------

Dimensions

Dimensional drawing	
Depth	29.4 mm

Mechanical characteristics

Ferrule diameter	2.50 mm
------------------	---------

Material specifications

Color	Bare metallic
Material	Die-cast zinc
Flammability rating according to UL 94	V0

Cable/line

Cable type	Fiberglass
------------	------------

FO cable

Number of fibers	2
Fiber type	GOF, PCF, POF
Attenuation	≤ 0.2 dB

Characteristics

Attenuation	< 2 dB
-------------	--------

Environmental and real-life conditions

Ambient conditions	
--------------------	--

PSM-SET-BFOC-LINK/2 - Fiber optic coupling



2799429

<https://www.phoenixcontact.com/us/products/2799429>

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (assembly)	-5 °C ... 50 °C

PSM-SET-BFOC-LINK/2 - Fiber optic coupling


2799429

<https://www.phoenixcontact.com/us/products/2799429>




Drawings

Dimensional drawing

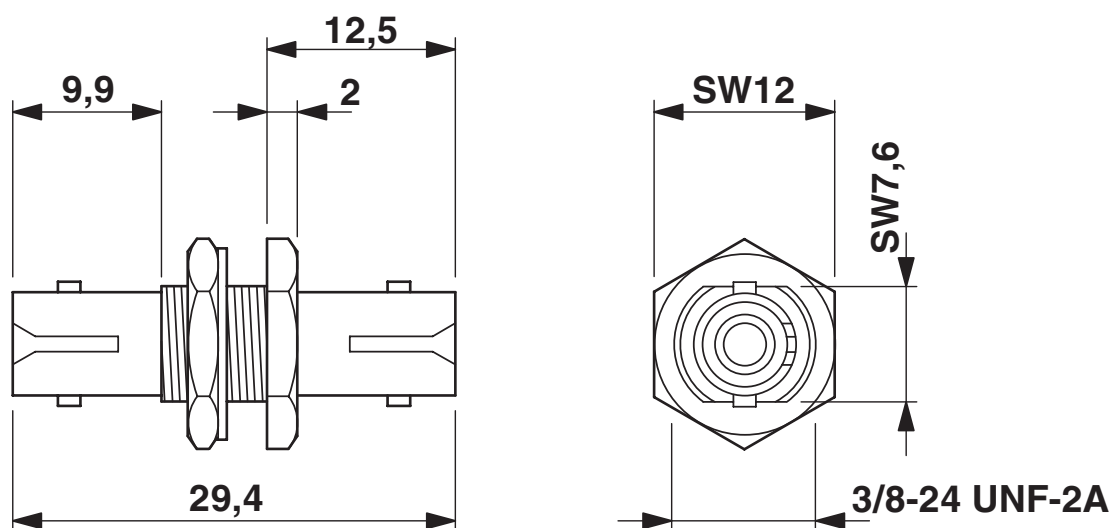

Dimensional drawing B-FOC coupling

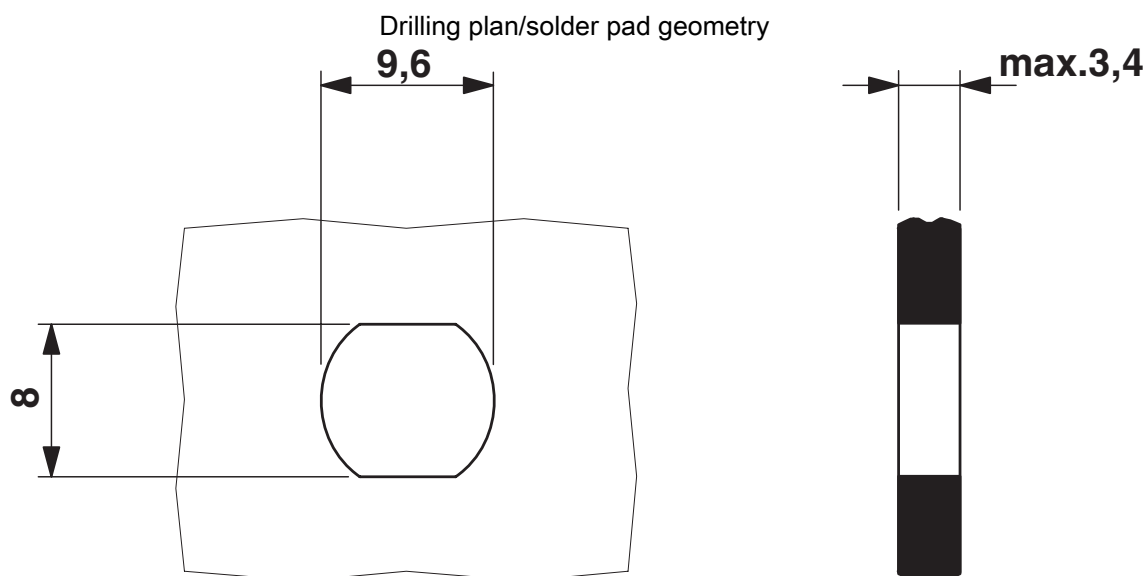

Drilling diagram B-FOC panel feed-through

PSM-SET-BFOC-LINK/2 - Fiber optic coupling



2799429

<https://www.phoenixcontact.com/us/products/2799429>

Classifications

ECLASS

ECLASS-11.0	19170116
-------------	----------

ETIM

ETIM 8.0	EC000752
----------	----------

UNSPSC

UNSPSC 21.0	43223300
-------------	----------

PSM-SET-BFOC-LINK/2 - Fiber optic coupling



2799429

<https://www.phoenixcontact.com/us/products/2799429>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com