

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester



2800303
<https://www.phoenixcontact.com/no/products/2800303>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Lightning current arrester with encapsulated N-PE spark gap, single-channel. Housing width: 35 mm (2 pitches)

Commercial data

Item number	2800303
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	31BCL
Product key	CL1131
Catalog page	Page 31 (C-6-2013)
GTIN	4046356535236
Weight per piece (including packing)	367.9 g
Weight per piece (excluding packing)	367.9 g
Customs tariff number	85363010
Country of origin	DE

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester



2800303

<https://www.phoenixcontact.com/no/products/2800303>

Technical data

Product properties

IEC test classification	I
	T1
EN type	T1
IEC power supply system	TN-S
	TT
Type	DIN rail module, two-section, divisible
Product type	Combination type
Number of positions	1
Surge protection fault message	none

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Connection data

Connection method	Screw terminal blocks
Screw thread	M5
Tightening torque	4.5 Nm
Stripping length	18 mm
Conductor cross section flexible	2.5 mm ² ... 25 mm ²
Conductor cross section rigid	2.5 mm ² ... 35 mm ²
Conductor cross section AWG	13 ... 2

Dimensions

Dimensional drawing	
Width	35.6 mm
Height	90 mm
Depth	71.2 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	2 Div.

Material specifications

Color	black (RAL 9005)
-------	------------------

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester



2800303

<https://www.phoenixcontact.com/no/products/2800303>

Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6/PBT
Material group	I
Housing material	PBT

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Mode of protection	N-PE
Direction of action	N-PE
Nominal voltage U_N	240 V AC (TN - only N-PE) 240 V AC (TT - only N-PE)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	260 V AC
Rated load current I_L	125 A (< 55 °C)
Residual current I_{PE}	≤ 0.01 mA
Nominal discharge current I_n (8/20) μs	100 kA
Impulse discharge current (10/350) μs, charge	50 As
Impulse discharge current (10/350) μs, specific energy	2500 kJ/Ω
Impulse discharge current (10/350) μs, peak value I_{imp}	100 kA
Follow current interrupt rating I_{fi}	100 A (260 V AC)
Voltage protection level U_p	≤ 1.5 kV
Residual voltage U_{res}	≤ 1.5 kV (at I_n) ≤ 1 kV (at 10 kA) ≤ 0.9 kV (at 5 kA) ≤ 0.8 kV (at 3 kA)
Front of wave sparkover voltage at 6 kV (1.2/50) μs	≤ 1.5 kV
TOV behavior at U_T	1200 V AC (200 ms / withstand mode)
Response time t_A	≤ 100 ns

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	25g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (5 - 500 Hz/2.5 h/X, Y, Z)

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester



2800303

<https://www.phoenixcontact.com/no/products/2800303>

Standards and regulations

Air clearances and creepage distances

Standards/regulations	EN 60664-1 / IEC 60664-1 / IEC 61643-11
Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester




2800303

<https://www.phoenixcontact.com/no/products/2800303>

Drawings

Dimensional drawing

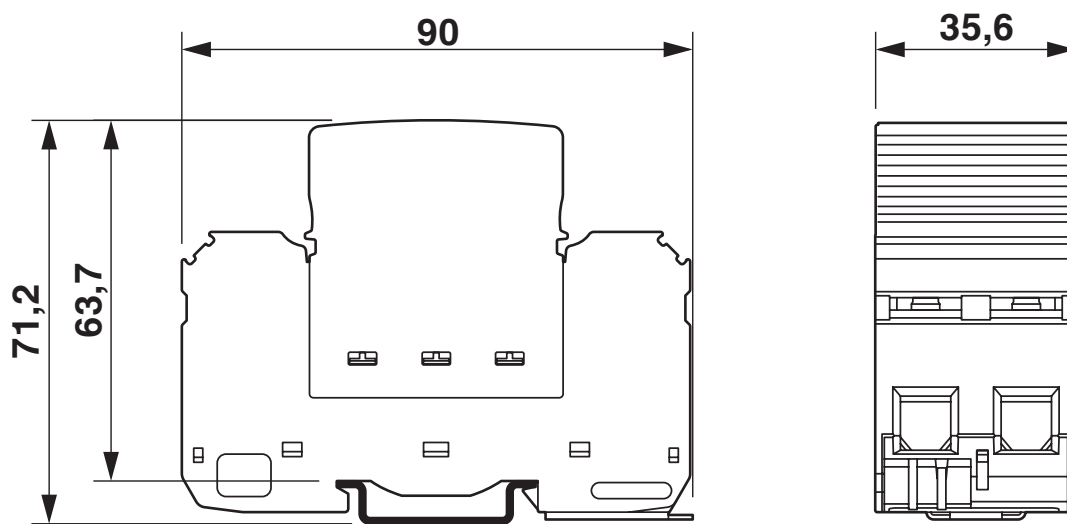


FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester

2800303

<https://www.phoenixcontact.com/no/products/2800303>

Circuit diagram

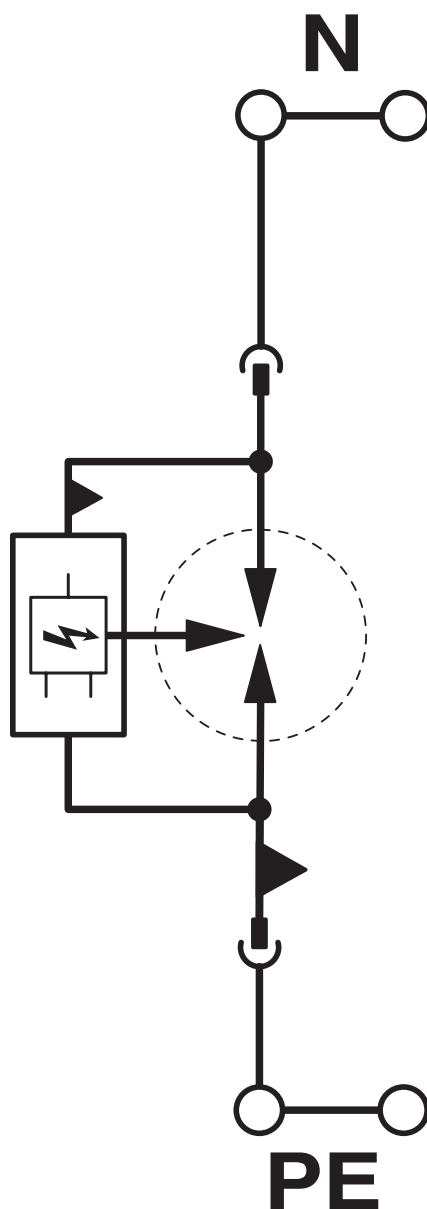

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester



2800303

<https://www.phoenixcontact.com/no/products/2800303>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/no/products/2800303>



IECEE CB Scheme

Approval ID: NL-58250



EAC

Approval ID: RU C-DE.*09.B.00169

CCA

Approval ID: NTR-NL 7734



KEMA-KEUR

Approval ID: 71-108169

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester



2800303
<https://www.phoenixcontact.com/no/products/2800303>

Classifications

ECLASS

ECLASS-11.0	27130802
ECLASS-13.0	27171201

ETIM

ETIM 9.0	EC000381
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

FLT 100 N/PE-1.5 - Type 1+2 combined lightning current and surge arrester



2800303
<https://www.phoenixcontact.com/no/products/2800303>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT AS
Strømsveien 344
N-1081 Oslo
+47 22 07 68 00
norge@phoenixcontact.com