

PT-IQ-2X1-24DC-P - Surge protection plug



2800776

<https://www.phoenixcontact.com/us/products/2800776>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection plug with integrated multi-stage status indicator on the module for two signal wires with common reference potential. 24 V DC nominal voltage.

Your advantages

- Predictive monitoring with 3-stage LED display
- Integration of the status message into the system controller via group remote signaling
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs
- Maximum ease of maintenance, thanks to the 2-piece design
- Maximum protection for MCR applications with high discharge capacity

Commercial data

Item number	2800776
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL22
Product key	CL2151
Catalog page	Page 73 (C-6-2013)
GTIN	4046356645331
Weight per piece (including packing)	50.5 g
Weight per piece (excluding packing)	46 g
Customs tariff number	85363010
Country of origin	DE

PT-IQ-2X1-24DC-P - Surge protection plug



2800776
<https://www.phoenixcontact.com/us/products/2800776>

Technical data

Notes

General	This product is a replacement plug.
---------	-------------------------------------

Product properties

Type	Male
Product type	Replacement plug
Product family	PLUGTRAB IQ
Surge protection fault message	Optical, multi-stage


Electrical properties

Nominal voltage U_N	24 V DC
-----------------------	---------

Connection data

Connection method	pluggable
-------------------	-----------

Dimensions

Dimensional drawing	
Width	17.7 mm
Height	45 mm
Depth	53.4 mm
Horizontal pitch	1 Div.
Complete module width	17.7 mm
Complete module height	91.1 mm
Complete module depth	77.5 mm

Material specifications

Color	black (RAL 9005)
	black (RAL 9005)
Flammability rating according to UL 94	V-0
Housing material	PA 6.6

Protective circuit

Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Maximum continuous voltage U_C	30 V DC
	21 V AC
Rated current	1000 mA (45 °C)
Total discharge current I_{total} (8/20) μ s	20 kA
Surge protection fault message	Optical, multi-stage

PT-IQ-2X1-24DC-P - Surge protection plug



2800776

<https://www.phoenixcontact.com/us/products/2800776>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 %

Standards and regulations

Standards/specifications	EN 61643-21/A1
Note	2009

Mounting

Mounting type	on base element
---------------	-----------------

PT-IQ-2X1-24DC-P - Surge protection plug


2800776

<https://www.phoenixcontact.com/us/products/2800776>



Drawings

Dimensional drawing

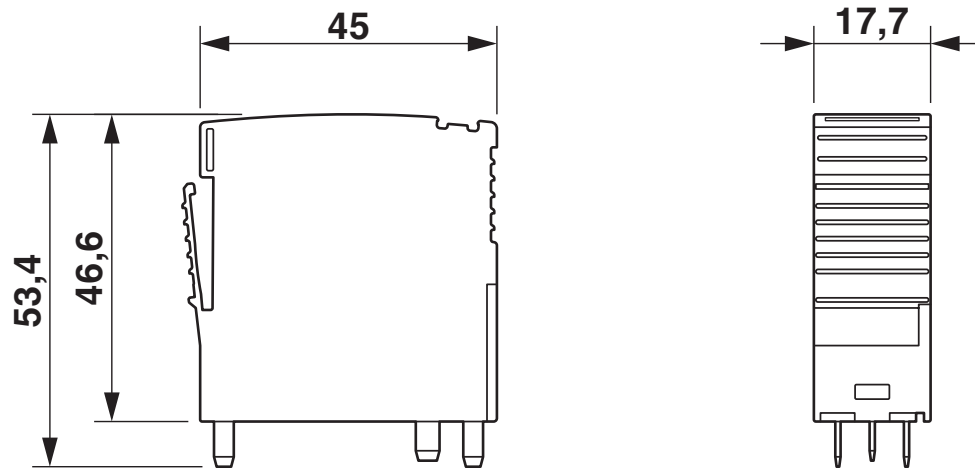

PT-IQ-2X1-24DC-P - Surge protection plug



2800776

<https://www.phoenixcontact.com/us/products/2800776>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2800776>



EAC

Approval ID: RU C-DE.*09.B.00169

PT-IQ-2X1-24DC-P - Surge protection plug



2800776

<https://www.phoenixcontact.com/us/products/2800776>

Classifications

ECLASS

ECLASS-11.0	27130807
ECLASS-13.0	27171501

ETIM

ETIM 9.0	EC001625
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

PT-IQ-2X1-24DC-P - Surge protection plug



2800776
<https://www.phoenixcontact.com/us/products/2800776>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com