

2800779

<https://www.phoenixcontact.com/us/products/2800779>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection, consisting of protective plug and base element, with integrated multi-stage status indicator on the module for two signal wires with common reference potential. Indirect grounding via gas-filled surge arrester.

Commercial data

Item number	2800779
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	CL22
Product key	CL2151
Catalog page	Page 75 (C-6-2015)
GTIN	4046356645300
Weight per piece (including packing)	107.9 g
Weight per piece (excluding packing)	107.9 g
Customs tariff number	85363010
Country of origin	DE

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

Technical data

Notes

General

Note	Remote signaling as well as the power supply of the DIN rail connector are established by snapping the module into place on the DIN rail connector.
------	---

Product properties

Product type	Surge protection for MCR technology
Product family	PLUGTRAB IQ
IEC test classification	C1
	C2
	C3
	D1
Type	DIN rail module, two-section, divisible
Surge protection fault message	Optical, multi-stage

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal voltage U_N	5 V DC
-----------------------	--------

Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 Nm
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section rigid	0.2 mm² ... 4 mm²
Conductor cross section AWG	24 ... 12

Dimensions

Dimensional drawing	
Width	17.7 mm
Height	91.1 mm
Depth	77.5 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	1 Div.

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

Material specifications

Flammability rating according to UL 94	V-0
Housing material	PA 6.6

Protective circuit

Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Maximum continuous voltage U_C	6 V DC 4 V AC
Rated current	1000 mA (40 °C)
Operating effective current I_C at U_C	≤ 2 mA (per path)
Residual current I_{PE}	≤ 1 μ A
Nominal discharge current I_n (8/20) μ s (line-ground)	10 kA
Pulse discharge current I_{imp} (10/350) μ s (line-earth)	2.5 kA
Total discharge current I_{total} (8/20) μ s	20 kA
Voltage protection level U_p (line-earth)	≤ 720 V (C1 - 1 kV / 500 A) ≤ 870 V (C2 - 10 kV / 5 kA) ≤ 1000 V (C3 - 25 A) ≤ 1000 V (C3 - 50 A)
Voltage protection level U_p (line-signalground)	≤ 120 V (C1 - 1 kV / 500 A) ≤ 150 V (C2 - 10 kV / 5 kA) ≤ 25 V (C3 - 25 A) ≤ 25 V (C3 - 50 A)
Voltage protection level U_p static (line-earth)	≤ 100 V (C2 - 10 kV / 5 kA) ≤ 60 V (C3 - 25 A) ≤ 60 V (C3 - 50 A)
Voltage protection level U_p static (line-signalground)	≤ 30 V (C1 - 1 kV / 500 A) ≤ 85 V (C2 - 10 kV / 5 kA)
Response time t_A (line-earth)	≤ 100 ns
Response time t_A (line-signalground)	≤ 1 ns
Input attenuation aE, asym.	typ. 0.3 dB (≤ 45 kHz/150 Ω)
Cut-off frequency f_g (3 dB), asym. (signal ground) in 150 Ω system	typ. 300 kHz
Capacity (Core-Earth)	typ. 7.5 nF
Resistance per path	1.2 $\Omega \pm 5$ %
Surge protection fault message	Optical, multi-stage
Max. required back-up fuse	1 A (FF)
Impulse durability (line-earth)	C1 - 1 kV / 500 A C2 - 10 kV / 5 kA C2 - 10 kA C3 - 50 A D1 - 2.5 kA
Impulse durability (line-signalground)	C1 - 1 kV / 500 A C2 - 10 kV / 5 kA

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

	C2 - 10 kA
	C3 - 50 A
	D1 - 2,5 kA
Pulse reset time (line-earth)	≤ 10 ms
Pulse reset time (line-signalground)	≤ 10 ms

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 4000 m (amsl)

Standards and regulations

Standards/specifications	IEC 61643-21
Note	2000 + A1:2008, modified
Standards/specifications	EN 61643-21
Note	2001 + A1:2009
Standards/specifications	EN 61000-6-3
Note	2007 + A1:2011
Standards/specifications	EN 61000-6-2
Note	2005

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


PT-IQ-2X1+F-5DC-UT - Surge protection device

2800779


<https://www.phoenixcontact.com/us/products/2800779>

Drawings


Circuit diagram

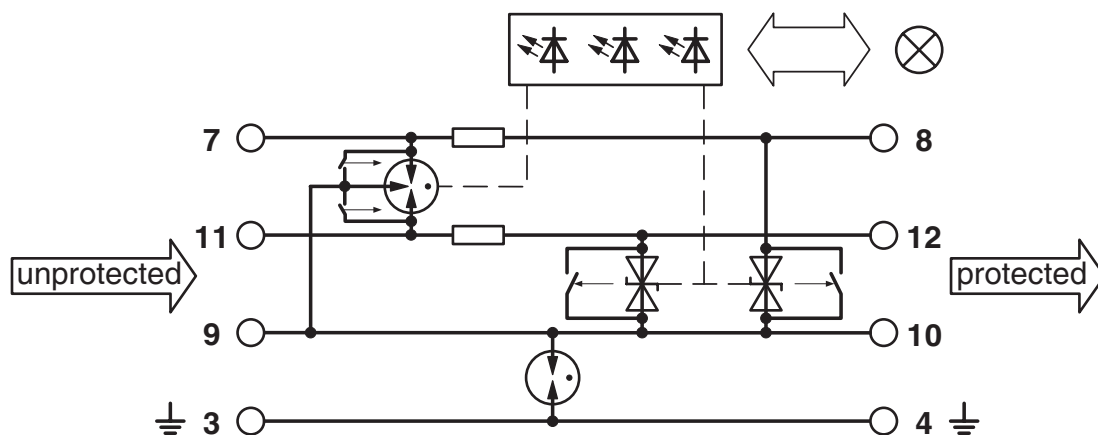

Dimensional drawing

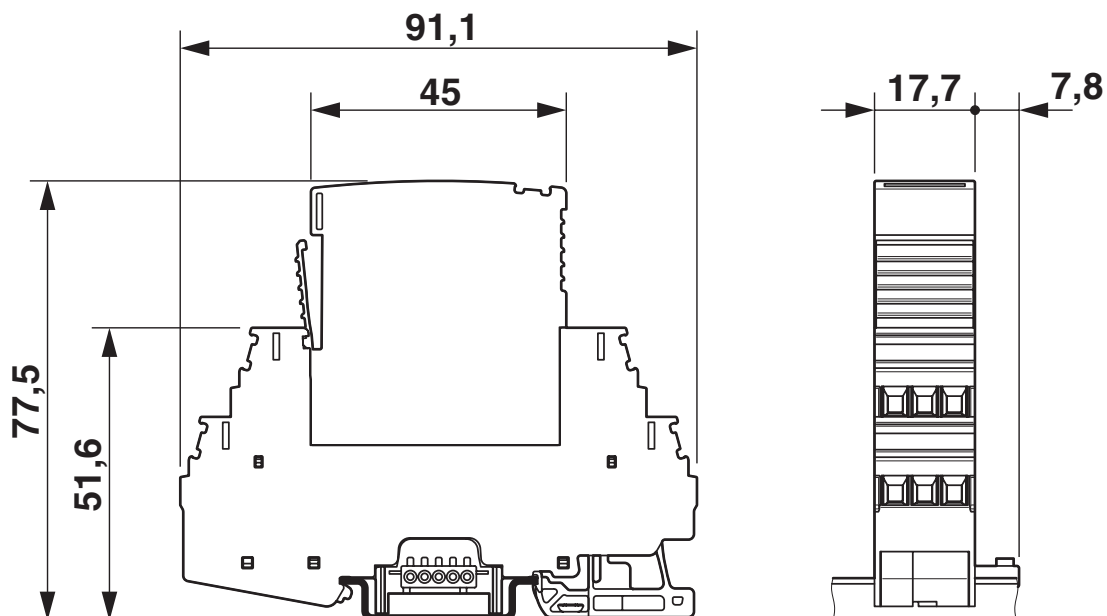

Diagram

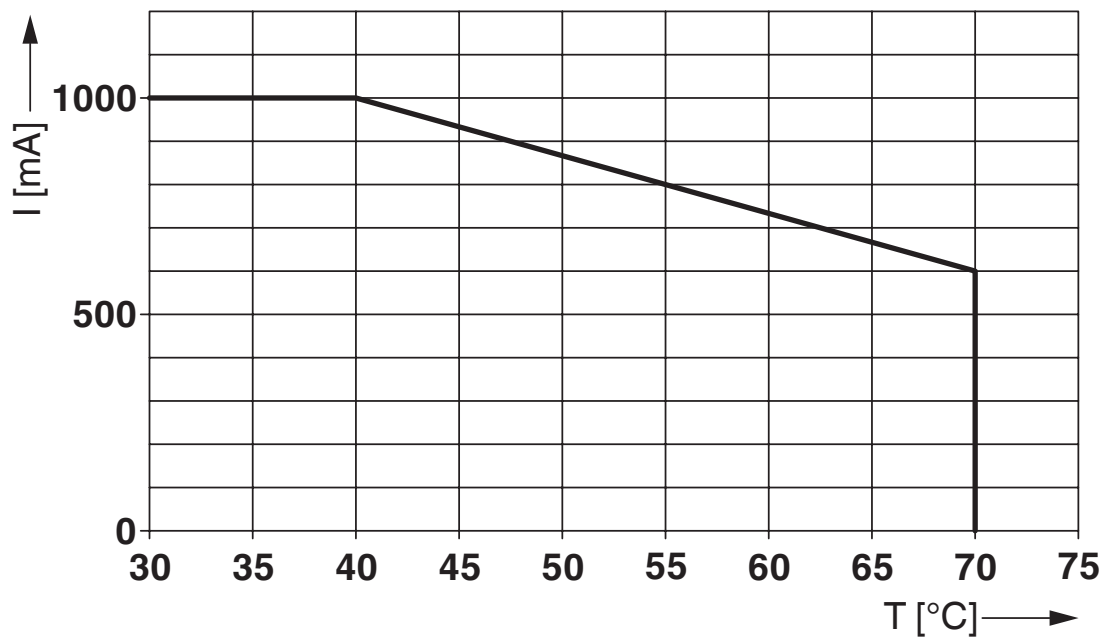

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

Mandatory accessories

PT-IQ-PTB-UT - Supply and remote module

2800768

<https://www.phoenixcontact.com/us/products/2800768>



Module for power supply and multi-stage, floating remote signaling of connected surge protection modules.

Accessories

X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

<https://www.phoenixcontact.com/us/products/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

ZBF 5/WH-100:UNBEDRUCKT - Zack Marker strip, flat

0808668

<https://www.phoenixcontact.com/us/products/0808668>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 1000

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

<https://www.phoenixcontact.com/us/products/0808671>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

<https://www.phoenixcontact.com/us/products/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

<https://www.phoenixcontact.com/us/products/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

<https://www.phoenixcontact.com/us/products/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

ZBN 18:UNBEDRUCKT - Zack marker strip

2809128

<https://www.phoenixcontact.com/us/products/2809128>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

E/ME TBUS NS35 GY - End bracket

2713780

<https://www.phoenixcontact.com/us/products/2713780>



End clamp, stable construction for DIN rail bus connector

PT-IQ-2X1+F-5DC-UT - Surge protection device




2800779

<https://www.phoenixcontact.com/us/products/2800779>

FK-MC 0,5/ 5-ST-2,5 - PCB connector

1881354

<https://www.phoenixcontact.com/us/products/1881354>



PCB connector, nominal cross section: 0.5 mm², color: green, nominal current: 4 A, rated voltage (III/2): 160 V, contact surface: Tin, contact connection type: Socket, number of potentials: 5, number of rows: 1, number of positions: 5, number of connections: 5, product range: FK-MC 0,5/...-ST, pitch: 2.5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, plug-in system: COMBICON FK-MC 0,5, locking: without, mounting: without, type of packaging: packed in cardboard

SSA 3-6 - Shield connection

2839295

<https://www.phoenixcontact.com/us/products/2839295>



Shield fast connection for 3 ... 6 mm cable diameter. Potential connecting cable: 200 mm, 1 mm², color: black

PT-IQ-2X1+F-5DC-UT - Surge protection device



2800779

<https://www.phoenixcontact.com/us/products/2800779>

SSA 5-10 - Shield connection

2839512

<https://www.phoenixcontact.com/us/products/2839512>



Shield fast connection for 5 ... 10 mm cable diameter. Potential connecting cable:
200 mm, 1 mm², color: black

PT-IQ-2X1-5DC-P - Surge protection plug

2800774

<https://www.phoenixcontact.com/us/products/2800774>



Surge protection plug with integrated multi-stage status indicator on the module
for two signal wires with common reference potential. 5 V DC nominal voltage.

PT-IQ-2X1+F-5DC-UT - Surge protection device




2800779

<https://www.phoenixcontact.com/us/products/2800779>

PT-IQ-17,5-TBUS-5-2.0 - DIN rail bus connectors

2906878

<https://www.phoenixcontact.com/us/products/2906878>



DIN rail connector for PT-IQ system for establishing remote signaling and the power supply when a surge protection module is snapped on.

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com