

# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker



2800835

<https://www.phoenixcontact.com/pc/products/2800835>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

## Your advantages

- Individually adjustable with protective plugs
- Fuse protection for above-average conductor lengths with the aid of the SFB characteristic curve
- Protective plug with fixed nominal current value as protection against unintentional changes
- Increased safety with electrical isolation in the event of errors
- Modular expansion possible thanks to the uniform, plug-in housing concept
- Compact design with precise nominal current levels
- Sophisticated remote signaling concept enables monitoring from any location
- Maximum overcurrent protection across long cable paths via SFB trigger characteristic
- Supply/remote signaling can be bridged with CLIPLINE complete accessories

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2800835             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product key                          | CLA124              |
| Catalog page                         | Page 311 (C-4-2019) |
| GTIN                                 | 4046356689663       |
| Weight per piece (including packing) | 44.9 g              |
| Weight per piece (excluding packing) | 42.5 g              |
| Customs tariff number                | 85362010            |
| Country of origin                    | ID                  |

# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker



2800835

<https://www.phoenixcontact.com/pc/products/2800835>

## Technical data

### Notes

|         |                                                                                                                     |
|---------|---------------------------------------------------------------------------------------------------------------------|
| General | When mounted in rows, the nominal device current can be limited to just 80% or must be overdimensioned accordingly. |
|---------|---------------------------------------------------------------------------------------------------------------------|

### Product properties

|                     |                                        |
|---------------------|----------------------------------------|
| Type                | Male                                   |
| Product type        | Thermomagnetic device circuit breakers |
| Product family      | CB TM                                  |
| Number of positions | 1                                      |
| No. of channels     | 1                                      |

### Insulation characteristics

|                     |   |
|---------------------|---|
| Degree of pollution | 2 |
|---------------------|---|

### Electrical properties

|           |                  |
|-----------|------------------|
| Fuse type | Automatic device |
|-----------|------------------|

### General

|                                                 |                                                                       |
|-------------------------------------------------|-----------------------------------------------------------------------|
| Rated voltage                                   | 50 V DC (IEC 60934)                                                   |
|                                                 | 50 V DC (UL 1077)                                                     |
|                                                 | 50 V DC (UL 508 - with plug-in base)                                  |
| Rated insulation voltage $U_i$                  | 277 V AC (UL 1077)                                                    |
|                                                 | 250 V AC (IEC 60934)                                                  |
| Rated current $I_N$                             | 0.5 A (IEC 60934)                                                     |
|                                                 | 0.5 A DC (low-induction load according to UL 1077)                    |
|                                                 | 0.5 A DC (low-induction load according to UL 508 - with plug-in base) |
| Rated surge voltage                             | 2.5 kV (Increased insulation in actuation area)                       |
| Insulation resistance $R_{iso}$                 | > 100 M $\Omega$ (500 V DC)                                           |
| Auxiliary circuit                               | 277 V AC / 0.5 A (Low-induction)                                      |
|                                                 | 277 V AC / 1 A (Low-induction, maximum of 2000 cycles)                |
|                                                 | 50 V DC / 1 A (Low-induction)                                         |
| Type of actuation                               | S type                                                                |
| Tripping method                                 | TM (thermomagnetic)                                                   |
| Tripping level                                  | Trip-free mechanism (positive)                                        |
| Device resistance                               | 4.9 $\Omega$                                                          |
| Required backup fuse                            | 15 A ( $I > I_{cn}$ )                                                 |
| Rated short-circuit switching capacity $I_{cn}$ | 600 A (50 V DC)                                                       |
| Short-circuit switching capacity                | 1000 A AC (277 V AC)                                                  |
|                                                 | 1000 A DC (50 V DC)                                                   |
| Dielectric strength                             | 3000 V AC (Actuation area)                                            |
|                                                 | 1500 V AC (Main to auxiliary circuit)                                 |
|                                                 | 1500 V AC (Open main circuit)                                         |

# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker



2800835

<https://www.phoenixcontact.com/pc/products/2800835>

|                        |                                           |
|------------------------|-------------------------------------------|
|                        | 1000 V AC (Open auxiliary circuit)        |
| Switching cycles, max. | 6000 (at $1 \times I_n$ )                 |
| Fuse                   | SFB                                       |
| Power dissipation      | 1.25 W (in nominal operation per channel) |
| Voltage drop           | 2.5 V (at $1 \times I_n$ )                |


## Auxiliary contact

|                                        |       |
|----------------------------------------|-------|
| Minimum operating voltage $U_{min}$ DC | 10 V  |
| Maximum operating voltage $U_{max}$ DC | 240 V |
| Maximum operating voltage $U_{max}$ AC | 240 V |
| Minimum operating current $I_{min}$    | 10 mA |
| Max. operating current $I_{max}$       | 1 A   |

## Connection data

|                   |           |
|-------------------|-----------|
| Connection method | pluggable |
| Connection method | pluggable |

## Dimensions

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing    |  |
| Width                  | 12.3 mm                                                                              |
| Height                 | 45 mm                                                                                |
| Depth                  | 52 mm                                                                                |
| Complete module width  | 12.3 mm                                                                              |
| Complete module height | 90 mm                                                                                |
| Complete module depth  | 77.3 mm                                                                              |

## Material specifications

|                                        |                                     |
|----------------------------------------|-------------------------------------|
| Color                                  | gray (RAL 7042)<br>black (RAL 9005) |
| Flammability rating according to UL 94 | V-0                                 |
| Insulating material group              | II                                  |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Environmental and real-life conditions

### Ambient conditions

|                      |                       |
|----------------------|-----------------------|
| Degree of protection | IP30 (Actuation area) |
|----------------------|-----------------------|

# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker



2800835

<https://www.phoenixcontact.com/pc/products/2800835>

|                                         |                               |
|-----------------------------------------|-------------------------------|
| Ambient temperature (operation)         | -30 °C ... 60 °C              |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C              |
| Humidity test                           | 240 h, 95 % RH, 40 °C         |
| Shock (operation)                       | 30g (IEC 60068-2-27, Test Ea) |
| Vibration (operation)                   | 8g (IEC 60068-2-6, Test Fc)   |

## Approvals

### UL approval

|                |                            |
|----------------|----------------------------|
| Identification | UL Listed UL 508           |
|                | UL/C-UL Recognized UL 1077 |

### CSA

|                |                              |
|----------------|------------------------------|
| Identification | CSA CAN/CSA-C22.2 No. 235-04 |
|----------------|------------------------------|

### Shipbuilding approval

|                |        |
|----------------|--------|
| Identification | DNV GL |
|----------------|--------|

## Standards and regulations

|                          |          |
|--------------------------|----------|
| Standards/specifications | EN 60934 |
|--------------------------|----------|

## Mounting


|                   |                 |
|-------------------|-----------------|
| Mounting type     | on base element |
| Connection method | pluggable       |



**PHOENIX  
CONTACT**

<https://www.phoenixcontact.com/pc/products/2800835>

## Application drawing

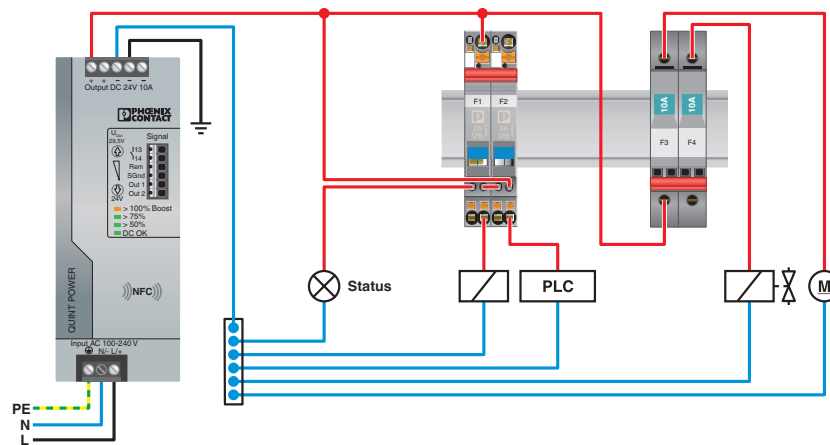


# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker


2800835

<https://www.phoenixcontact.com/pc/products/2800835>

Application drawing

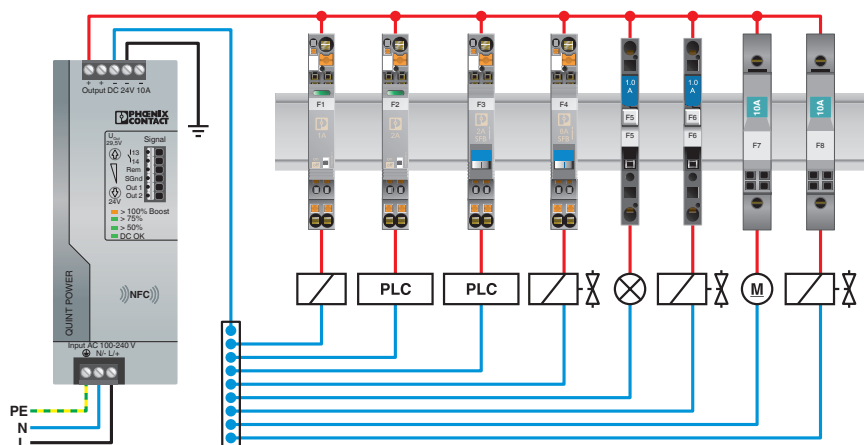

Dimensional drawing

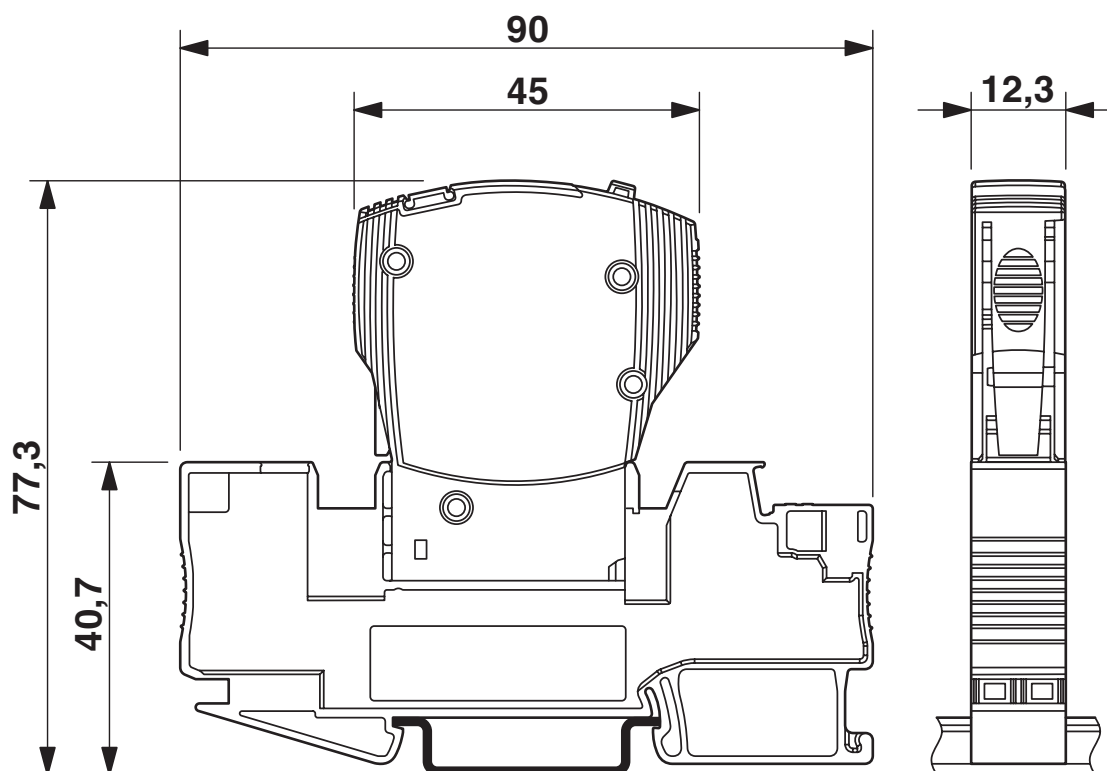


The figure shows the complete module consisting of a base element and connector

# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker



2800835

<https://www.phoenixcontact.com/pc/products/2800835>

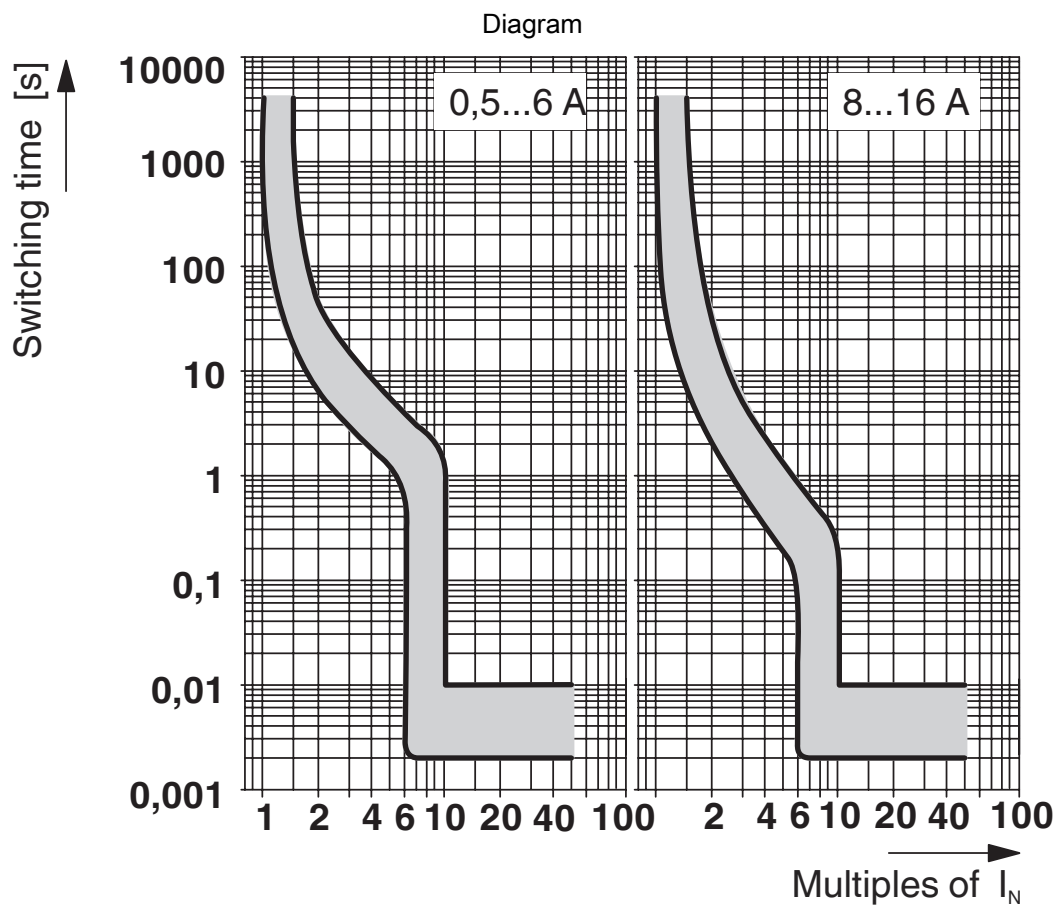

Trigger characteristic in the DC range

# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker



2800835

<https://www.phoenixcontact.com/pc/products/2800835>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2800835>



**cUL Recognized**  
Approval ID: FILE E 140459



**UL Recognized**  
Approval ID: FILE E 140459



**EAC**  
Approval ID: EAC-Zulassung



**DNV GL**  
Approval ID: TAE00003C7



**EAC**  
Approval ID: RU C-DE.\*09.B.00169



**VDE Zeichengenehmigung**  
Approval ID: 40034683



**UL Listed**  
Approval ID: FILE E 172140



**CCC**  
Approval ID: 2019010307158887



**CSA**  
Approval ID: 2786957



**cUL Listed**  
Approval ID: FILE E 172140



**KC**  
Approval ID: SW05012-15002

# CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker



2800835

<https://www.phoenixcontact.com/pc/products/2800835>

## UAE-RoHS

Approval ID: 22-09-50937

## cULus Recognized

## cULus Listed

2800835  
<https://www.phoenixcontact.com/pc/products/2800835>

Classifications

ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27140401 |
| ECLASS-12.0 | 27140401 |
| ECLASS-13.0 | 27140401 |

ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC003538 |
|----------|----------|

UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

2800835  
<https://www.phoenixcontact.com/pc/products/2800835>

Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)