

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug

2801231
<https://www.phoenixcontact.com/ca/products/2801231>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range

Commercial data

Item number	2801231
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	CL31
Product key	CL1324
Catalog page	Page 59 (C-6-2015)
GTIN	4046356749220
Weight per piece (including packing)	94.7 g
Weight per piece (excluding packing)	94.7 g
Customs tariff number	85363030
Country of origin	DE

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231
<https://www.phoenixcontact.com/ca/products/2801231>

Technical data

Product properties

Product type	Replacement plug
Product family	VALVETRAB MS
IEC test classification	PV T1
	PV T2
EN type	T1 / T2
IEC power supply system	DC
Type	Male
Number of positions	1
Installation location	Interior
Installation location of the disconnect device	Internal
Accessibility	Accessible
SPD failure behavior	OCFM (Open-Circuit Failure Mode)
Surge protection fault message	optical
Insulation characteristics	
Overvoltage category	III
Pollution degree	2


Electrical properties

Indicator/remote signaling	
Max. required back-up fuse	not required

Connection data

Connection method	pluggable
-------------------	-----------

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	52.4 mm
Depth	55.3 mm
Horizontal pitch	1 Div.

Material specifications

Color	black (RAL 9005)
-------	------------------

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/ca/products/2801231>

	black (RAL 9005)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6-FR
Material group	I
Housing material	PA 6.6-FR

Protective circuit

Direction of action	(L+)-PE & (L-)-PE & (L+)-(L-)
Standby power consumption P_C	≤ 25.00 mVA
Nominal discharge current I_n (8/20) μ s	15 kA
Maximum discharge current I_{max} (8/20) μ s	40 kA
Impulse discharge current (10/350) μ s, charge	2.5 As
Impulse discharge current (10/350) μ s, specific energy	6.25 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	5 kA
Voltage protection level U_p	≤ 1.8 kV
Residual voltage U_{res}	≤ 1.8 kV (at I_n)
	≤ 1.5 kV (at 5 kA)
	≤ 1.7 kV (at 10 kA)
	≤ 1.9 kV (at 20 kA)
	≤ 2.2 kV (at 30 kA)
	≤ 2.4 kV (at 40 kA)
Response time t_A	≤ 25 ns

Protective circuit DC voltage side (DC)

Open circuit voltage U_{OCSTC}	≤ 487.5 V DC
Maximum discharge current I_{max} (8/20) μ s	40 kA
Response time t_A	≤ 25 ns
Impulse discharge current (10/350) μ s, charge	2.5 As
Impulse discharge current (10/350) μ s, specific energy	6.25 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	5 kA
Insulation resistance R_{iso}	> 5 G Ω (at 500 V DC)
Nominal discharge current I_n (8/20) μ s	15 kA
Continuous operating current I_{CPV}	< 20 μ A
Maximum continuous operating voltage U_{CPV}	585 V DC
Short-circuit current rating I_{SCPV}	2000 A
Residual voltage U_{res}	≤ 1.8 kV (at I_n)
	≤ 1.5 kV (at 5 kA)
	≤ 1.7 kV (at 10 kA)
	≤ 1.9 kV (at 20 kA)
	≤ 2.2 kV (at 30 kA)
	≤ 2.4 kV (at 40 kA)
Voltage protection level U_p	≤ 1.8 kV

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/ca/products/2801231>

Standby power consumption P_C	≤ 25.00 mVA
---------------------------------	------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	60g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$)
Vibration (operation)	7.5g (5-500 Hz/2.5 h/XYZ)

Approvals

UL specifications

Maximum continuous operating voltage MCOV (L+) - G	1050 V DC
Nominal discharge current I_n (L+) - G	20 kA
Mode of protection	(L+) - G
Nominal voltage	875 V DC
Power distribution system	Single phase
Measured limiting voltage MLV (L+) - G	1900 V
SPD Type	4CA

Standards and regulations

Standards/specifications	EN 61643-31
Note	2019
Standards/specifications	IEC 61643-31
Note	2018

Mounting

Mounting type	on base element
---------------	-----------------

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug

2801231


<https://www.phoenixcontact.com/ca/products/2801231>

Drawings

Circuit diagram



Dimensional drawing

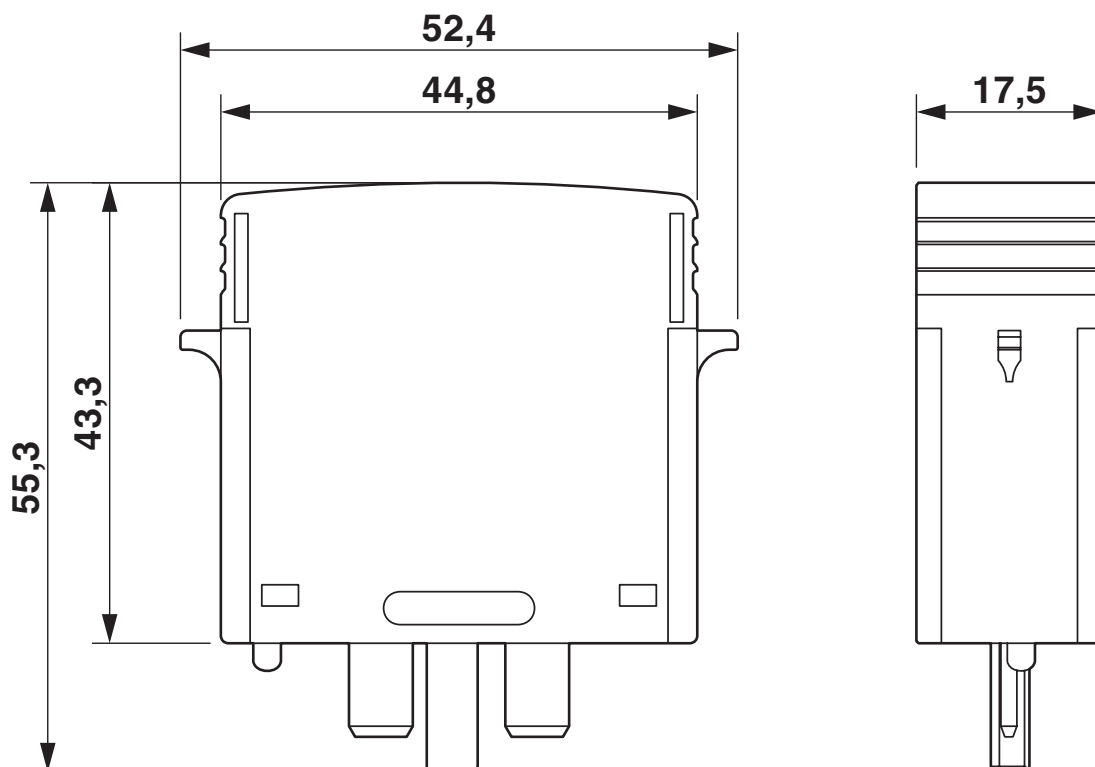

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/ca/products/2801231>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/2801231>



EAC

Approval ID: RU C-DE.*09.B.00169



KEMA-KEUR

Approval ID: 71-123544 REV.2



IECEE CB Scheme

Approval ID: NL-81006/A1

CCA

Approval ID: NTR-NL 7937

UAE-RoHS

Approval ID: 23-10-88705

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231
<https://www.phoenixcontact.com/ca/products/2801231>

Classifications

ECLASS

ECLASS-11.0	27130890
ECLASS-13.0	27171492

ETIM

ETIM 9.0	EC002496
----------	----------

UNSPSC

UNSPSC 21.0	39121620
-------------	----------

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231
<https://www.phoenixcontact.com/ca/products/2801231>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/ca/products/2801231>

Accessories

ZBN 18:UNBEDRUCKT - Zack marker strip

2809128

<https://www.phoenixcontact.com/ca/products/2809128>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

DK-BIC-35 - Feed-through terminal block

2749880

<https://www.phoenixcontact.com/ca/products/2749880>



Feed-through terminal block for VAL and FLT applications

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/ca/products/2801231>

B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/ca/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
8240 Parkhill Drive
Milton, Ontario L9T 5V7
1-800-890-2820
cdinfo@phoenixcontact.ca