

DT-TELE-SHDSL - Surge protection device



2801593

<https://www.phoenixcontact.com/pc/products/2801593>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Attachment plug with surge protection for two SHDSL telecommunications interfaces (ports). Connection: RJ45 (RJ12/RJ11) and plug-in screw terminal block (COMBICON). Alternatively, can be snapped onto a DIN rail.

Commercial data

Item number	2801593
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CL3221
Catalog page	Page 162 (C-4-2017)
GTIN	4046356868457
Weight per piece (including packing)	322.8 g
Weight per piece (excluding packing)	320 g
Customs tariff number	85363010
Country of origin	DE

DT-TELE-SHDSL - Surge protection device



2801593
<https://www.phoenixcontact.com/pc/products/2801593>

Technical data


Product properties

Product type	Surge protection for information technology
Product family	DATATRAB
IEC test classification	B2
	C1
	C2
	C3
	D1
VDE requirement class	B2
	C1
	C2
	C3
	D1
Type	Attachment plug for DIN rail mounting
Number of positions	4
Wire pairs per module	2

Connection data

Connection method	RJ45 / COMBICON
Screw thread	M2
Tightening torque	0.22 Nm
Conductor cross section flexible	0.14 mm² ... 1.5 mm²
Conductor cross section rigid	0.14 mm² ... 1.5 mm²
Conductor cross section AWG	28 ... 16

Dimensions

Dimensional drawing	
Width	25 mm
Height	103 mm
Depth	63 mm

Material specifications

Color	Silver
	black (RAL 9005)
Housing material	Zinc die-cast

DT-TELE-SHDSL - Surge protection device



2801593

<https://www.phoenixcontact.com/pc/products/2801593>

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	Line-Line & Line-Ground/Shield
Maximum continuous voltage U_C	185 V DC
	130 V AC
Rated current	≤ 380 mA (25 °C)
Operating effective current I_C at U_C	≤ 6 μ A
Residual current I_{pE}	≤ 4 μ A
Nominal discharge current I_n (8/20) μ s (line-line)	≤ 5 kA
Nominal discharge current I_n (8/20) μ s (line-ground)	≤ 5 kA
Pulse discharge current I_{imp} (10/350) μ s	2.5 kA (Number of pulses category D1)
Total discharge current I_{total} (8/20) μ s	10 kA
Nominal pulse current I_{an} (10/1000) μ s (line-line)	100 A
Nominal pulse current I_{an} (10/1000) μ s (line-earth)	100 A
Nominal pulse current I_{an} (10/700) μ s (line-line)	150 A
Nominal pulse current I_{an} (10/700) μ s (line-earth)	150 A
Voltage protection level U_p (line-line)	250 V (B2 - 100 A)
	≤ 250 V (C1 - 500 A)
	≤ 410 V (C2 - 5 kA)
	≤ 250 V (C3 - 100 A)
Voltage protection level U_p (line-earth)	≤ 580 V (B2 - 100 A)
	≤ 580 V (C1 - 500 A)
	≤ 790 V (C2 - 5 kA)
	≤ 300 V (C3 - 100 A)
Response time t_A (line-line)	≤ 100 ns
Response time t_A (line-earth)	≤ 100 ns
Input attenuation aE, sym.	typ. 0.3 dB ($\leq 2,8$ MHz / 100 Ω)
	typ. 3 dB (≤ 25 MHz / 100 Ω)
Cut-off frequency f_g (3 dB), sym. in 100 Ω system	25 MHz
Capacity (Core-Core)	55 pF
Capacity (Core-Earth)	7 pF
Resistance per path	3.3 Ω 20 %
Surge protection fault message	none
Impulse durability (line-line)	C1 - 1 kV / 500 A
	C2 - 10 kV / 5 kA
	B2 - 4 kV / 100 A
Impulse durability (line-earth)	B2 - 4 kV / 100 A
	C1 - 1 kV / 500 A
	C2 - 10 kV / 5 kA
	D1 - 1 kA

DT-TELE-SHDSL - Surge protection device



2801593

<https://www.phoenixcontact.com/pc/products/2801593>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Standards and regulations

VDE requirement class	B2
	C1
	C2
	C3
	D1

Air clearances and creepage distances

Standards/regulations	IEC 60664-1 / VDE 0110-1
-----------------------	--------------------------

Standards Information technology specification

Standards/regulations	IEC 61643-21
	IEC 61643-21
Standards/specifications	IEC 61643-21
Note	2002

Mounting

Mounting type	Connection-specific attachment plug and DIN rail, 35 mm
---------------	---


DT-TELE-SHDSL - Surge protection device




2801593
<https://www.phoenixcontact.com/pc/products/2801593>

Drawings

Circuit diagram

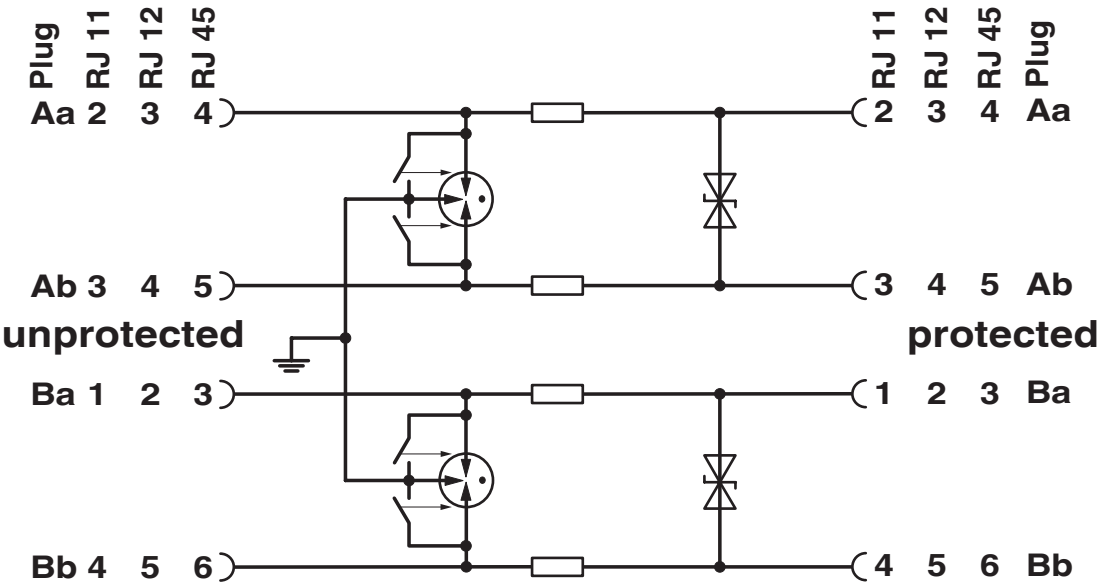

Dimensional drawing

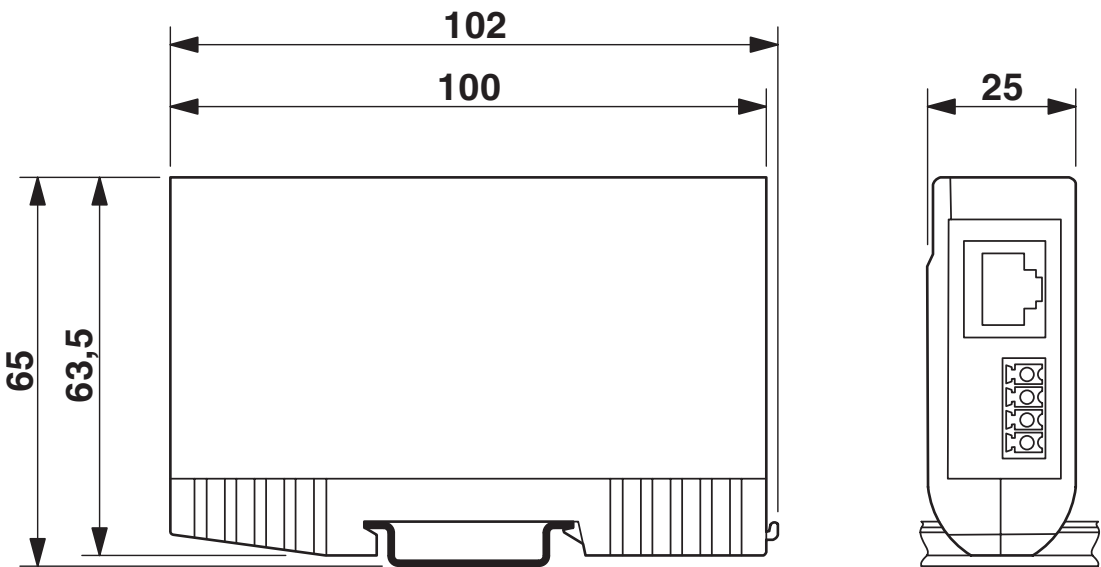

DT-TELE-SHDSL - Surge protection device



2801593

<https://www.phoenixcontact.com/pc/products/2801593>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2801593>



EAC

Approval ID: RU C-DE.*09.B.00169

DT-TELE-SHDSL - Surge protection device



2801593

<https://www.phoenixcontact.com/pc/products/2801593>

Classifications

ECLASS

ECLASS-11.0	27130807
ECLASS-13.0	27171503

ETIM

ETIM 9.0	EC001466
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

DT-TELE-SHDSL - Surge protection device



2801593
<https://www.phoenixcontact.com/pc/products/2801593>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(a)-I, 7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c3eb5453-7278-4b91-a1ac-a71994e5219e

DT-TELE-SHDSL - Surge protection device

2801593

<https://www.phoenixcontact.com/pc/products/2801593>



Accessories

PSI-MODEM-SHDSL/ETH - Ethernet extenders

2313643

<https://www.phoenixcontact.com/pc/products/2313643>



First generation: Unmanaged Ethernet extender for point-to-point connections, line and ring structures, data rates up to 30 Mbps, distances of up to 20 km on in-house copper cables, diagnostics via USB and LEDs, 2 SHDSL ports, 1 LAN port

PSI-MODEM-SHDSL/PB - Modem

2313656

<https://www.phoenixcontact.com/pc/products/2313656>



Industrial PROFIBUS extender, for point-to-point connections, linear structures, and mixed operation with repeaters and fiber optic converters. Distances of up to 20 km, PROFIBUS data rates of up to 1.5 Mbps via simple copper wires, such as in-house phone lines.

DT-TELE-SHDSL - Surge protection device

2801593

<https://www.phoenixcontact.com/pc/products/2801593>



PSI-MODEM-SHDSL/SERIAL - Modem

2313669

<https://www.phoenixcontact.com/pc/products/2313669>



Industrial SHDSL extender for serial RS-232/422/485 interfaces, point-to-point and line structures, serial data transmission up to 2000 kbps on in-house cables, diagnostics via USB and LEDs, two configurable alarm outputs

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com