

Surge protection device - LIT 4X1-24 - 2804649


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection in one-piece 6.2 mm wide DIN rail module for four conductors with common reference potential.

Why buy this product

- ✓ Can be used in binary, analog, and intrinsically safe circuits
- ✓ Protection of up to four signal wires over a design width of 6.2 mm

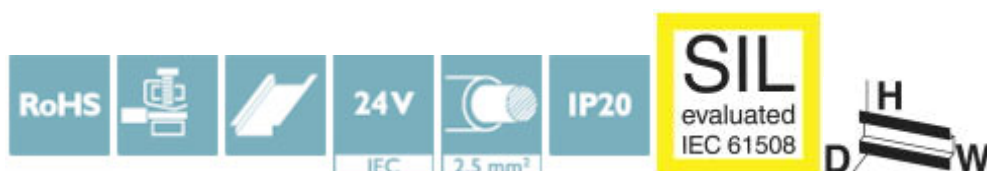

Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 428286
GTIN	4046356428286

Technical data

Dimensions

Height	93.1 mm
Width	6.2 mm
Depth	102.5 mm (incl. DIN rail 7.5 mm)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Degree of protection	IP20

General

Housing material	PBT
Flammability rating according to UL 94	V-0
Color	anthracite grey RAL 7016

Surge protection device - LIT 4X1-24 - 2804649

Technical data

General

Mounting type	DIN rail: 35 mm
Type	DIN rail module, one-piece
Direction of action	Line-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
Maximum continuous voltage U_C	36 V DC
	25 V AC
Rated current	350 mA (40° C)
Operating effective current I_C at U_C	$\leq 2 \mu A$
Residual current I_{PE}	$\leq 8 \mu A$
Nominal discharge current I_n (8/20) μs (line-earth)	5 kA
Pulse discharge current I_{imp} (10/350) μs (line-earth)	500 A
	2 kA (in total)
Total discharge current I_{total} (8/20) μs	20 kA
Max. discharge current I_{max} (8/20) μs maximum (line-earth)	10 kA
	20 kA (in total)
Nominal pulse current I_{an} (10/1000) μs (line-earth)	50 A
	200 A (in total)
Output voltage limitation at 1 kV/ μs (line-earth) spike	$\leq 60 V$
Residual voltage at I_n (line-earth)	$\leq 50 V$
Residual voltage with I_{an} (10/1000) μs (line-earth)	$\leq 60 V$
Voltage protection level U_p (line-earth)	$\leq 60 V$ (C1 - 500 V / 250 A)
	$\leq 95 V$ (C2 - 10 kV / 5 kA)
	$\leq 55 V$ (C3 - 10 A)
	$\leq 55 V$ (C3 - 50 A)
	$\leq 250 V$ (D1 - 500 A)
Response time t_A (line-earth)	$\leq 1 ns$
Input attenuation aE, asym.	typ. 0.3 dB (1 MHz / 50 Ω)
	typ. 0.2 dB (350 kHz / 150 Ω)
Cut-off frequency f_g (3 dB), asym. (PE) in 50 Ohm system	typ. 6 MHz
Cut-off frequency f_g (3 dB), asym. (PE) in 150 Ohm system	typ. 2 MHz
Capacity	$\leq 1.3 nF$ (per channel)
Resistance in series	3.3 $\Omega \pm 20 \%$
Surge protection fault message	none
Max. required back-up fuse	315 mA (T)
Impulse durability (line-earth)	C1 - 500 V / 250 A

Surge protection device - LIT 4X1-24 - 2804649

Technical data

Protective circuit

	C2 - 10 kV/5 kA
	C3 - 50 A
	D1 - 500 A
Alternating current carrying capacity (line-earth)	5 A - 1 s

Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section solid	0.2 mm² ... 2.5 mm²
Conductor cross section AWG	24 ... 14

Connection, equipotential bonding

Connection method	DIN rail NS35
-------------------	---------------

Standards and Regulations

Standards/specifications	IEC 61643-21 A2:2012
	EN 61643-21 2001 + A1:2009 + A2:2013

Environmental Product Compliance


China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Pictogram




Diagram

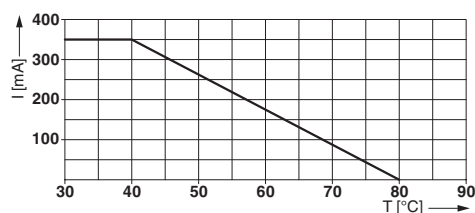


Surge protection device - LIT 4X1-24 - 2804649


Application drawing

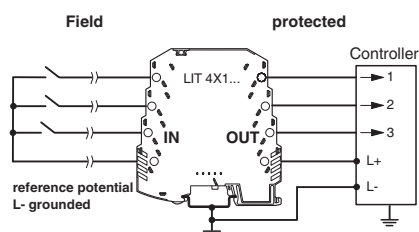

Dimensional drawing

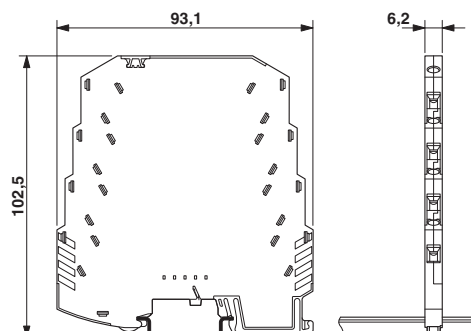

Circuit diagram

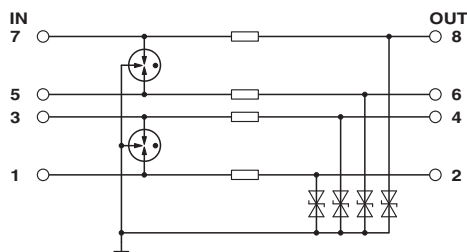

Approvals

Approvals

Approvals

UL Listed / EAC / EAC / DNV GL

Ex Approvals

Approval details

UL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 138168

EAC



EAC-Zulassung

EAC



RU C-
DE.A*30.B01561

Surge protection device - LIT 4X1-24 - 2804649

Approvals

DNV GL	http://exchange.dnv.com/tari/	TAE00001N8
--------	---	------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>